


PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR67/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 17 MHz to 62 MHz; third mechanical overtone; noncontrolled; series resonance.

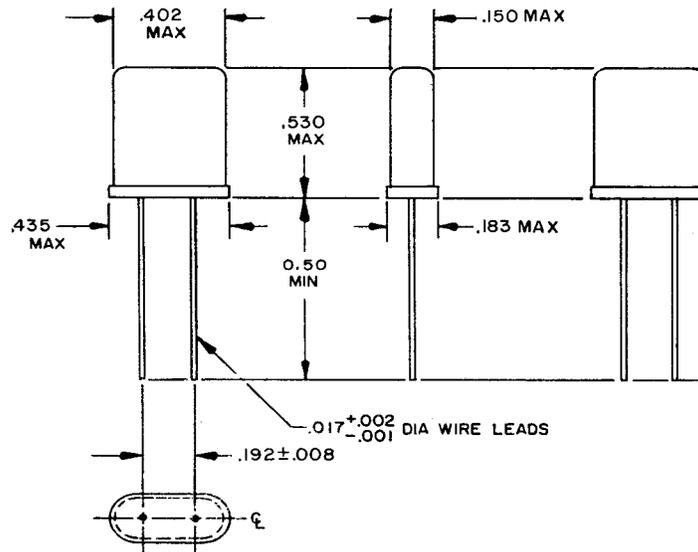

Inches	mm	Inches	mm
.001	.03	.192	4.88
.002	.05	.402	10.21
.008	.20	.435	11.05
.017	.43	.500	12.70
.150	3.81	.530	13.46
.183	4.65		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR67/U.

REQUIREMENTS

Dimensions, marking, and configuration: See figure 1.

Frequency range: 17 MHz to 62 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Mode of oscillation: Third mechanical overtone.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Calibration values:

Resistance: 40 ohms.

Resistor voltage drop: 0.28 volt.

Operating temperature range (noncontrolled): -55°C to +105°C, inclusive.

Frequency tolerance: ± 25 parts per million (ppm).

Equivalent resistance: 40 ohms, maximum.

Shock:

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Vibration: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Thermal shock:

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Aging:

Frequency change permitted: ± 5 ppm.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:

Army - AR, MI, SM
Navy - AS, CG, MC, OS, SH
Air Force - 19, 99

Preparing activity:

Army - CR

Agent:

DLA - CC

(Project 5955-0749-15)