



DEFENSE LOGISTICS AGENCY
DEFENSE SUPPLY CENTER, COLUMBUS
POST OFFICE BOX 3990
COLUMBUS, OH 43218-3990

IN REPLY
REFER TO

DSCC-VAI

June 22, 2004

MEMORANDUM FOR DLA/MILITARY DISTRIBUTION

SUBJECT: Initial Draft of A-A-59440 and nine slash sheets; See table for Project Numbers

A-A-59440	4820-0880-000
A-A-59440/001	4820-0881-000
A-A-59440/002	4820-0882-000
A-A-59440/003	4820-0853-000
A-A-59440/004	4820-0883-000
A-A-59440/005	4820-0868-000
A-A-59440/006	4820-0884-000
A-A-59440/007	4820-0885-000
A-A-59440/008	4820-0886-000
A-A-59440/009	4820-0887-000

The Initial drafts for these subject documents, dated 24 May, 2004, are now available for viewing and downloading from the DSCC-VA Web site:

<http://www.dscclia.mil/Programs/MilSpec/DocSearch.asp>

Major changes to these documents involves a complete rewrite and use of manufacturer's part numbers from Certificates of Compliances (CoC). CoC's have been mailed to manufacturers. When they return, only the part numbers that are listed on the CoC's will be used in the CID.

Concurrence or comments are required at this Center within 45 days from the date of the letter. Late comments will be held for the next coordination of the document. Comments from military departments must be identified as either "Essential" or "Suggested". Essential comments must be justified with supporting data. Military review activities should forward comments to their custodians of this office, As applicable, in sufficient time to allow for consolidating the department reply.

The point of contact for this document is Mr. Earnest Brown. Defense Supply Center Columbus, DSCC-VAI, Post Office Box 3990, Columbus, OH. 43218-3990. Mr. Earnest Brown can be reached at 614-692-1568/850-1568, or by e-mail: to <mailto:Earnest.Brown@dla.mil>.

Sincerely,

/signed/

Howard E. H. Jenkins
Acting Chief,
Interconnection Devices Team

cc:

DSCC-VSS (Ms. Beverly Wilson)
DSCC-LDA (Mr. Brett Rippl)
DSCC-LEA (Mr. Art Levenstein)
DSCC-MEA (Mr. Dan Krist)
DSCC-AAB (Mr. Dan Patel)
DSCC-MED (Mr. Jay Nutt)
DSCC-MEC (Mr. Walt Myers)
DSCC-MEA (Mr. Bob Trivett)
DSCC-CSAB (Mr. Don Groesbeck)
Army- MI, AV,AT
Air Force-99, 71
Navy- SH,MC,SA

NOTE: This draft, 24 May 2004, prepared by Defense Supply Center,
Columbus, DSCC-VAI, 3990 East Broad Street, Columbus, OH 43218-3990,
Has not been approved and is subjected to modification.
DO NOT USE PRIOR TO APPROVAL. (Project 4820-0881-000)

[INCH-POUND]
A-A-59440/1A
PROPOSED
SUPERSEDING
A-A-59440/1
13 August 1999
MS35782C
23 March 1983

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

COCKS, DRAIN, CENTER DRAIN, 150 P.S.I.

The General Services Administration has authorized the use
of this Commercial Item description (CID) for all federal agencies.

The complete requirements for procuring the drain cocks described herein shall consist of this
document and the latest issue in effect of CID A-A-59440.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is
included in the Part Identification Number (PIN) as shown in the following example

AA59440	/01	-	001
┌───┴───┐	┌───┴───┐		┌───┴───┐
CID number	Applicable CID sheet (two digits)		Dash number

SALIENT CHARACTERISTICS.

General. This slash sheet covers the requirements for cock drain center drain, in nominal sizes of 1/8 inch through
1/4 inch with NPTF threads. This item is for use in non-flammable liquid or gas systems where pressures do not
exceed 150 psig for Water, Oil and Gas, (WOG) at 150 F temperature.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this
document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAI, Post Office Box 3990, Columbus
OH 43216-5000, or telephone (614) 692-0566, or facsimile (FAX) (614) 692-6939 or emailed to:
construction@dsc.dla.mil. Since contact information can change you may want to verify the currency of this
information using ASSIST Online database at <http://www.dodssp.daps.mil>.

Interface and physical dimensions. Cocks, drain, center drain, supplied to this CID shall be as specified herein see figure 1.

Size. The tables herein list the permissible variation in dimensions for each size. The external dimensions of the cocks should not limit procurement unless the end applications restrict these dimensions.

PIN. The PIN should be used for Government purposes to buy commercial products to CID. See classification information for PIN format example.

Source of documents

DEPARTMENT OF DEFENSE STANDARDS

QQ-S-698 - Steel, Sheet and Strip, Low Carbon

(Copies of this document is available online at <http://assist.daps.dla.dla.mil/quicksearch/> or <http://www.dodssp.daps.mil> or from the Standardization Document Order desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

ASTM INTERNATIONAL

- ASTM B 16/B 16M - Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines-Replaces ASTM B16M
- ASTM B 22 - Standard Specification for Bronze Castings for Bridges and Turntables
- ASTM B 30 - Standard Specification for Copper Alloys in Ingot Form
- ASTM B 36/B 36M - Standard Specification for Brass Plate, Sheet, Strip, and Rolled Bar
- ASTM B 62 - Standard Specification for Composition Bronze or Ounce Metal Castings (Reinstated)
- ASTM B 121/B 121 M - Standard Specification for Leaded Brass Plate, Sheet, Strip, and Rolled Bar
- ASTM B 124/B 124M - Standard Specification for Copper and Copper Alloy Forging Rod, Bar, and Shapes
- ASTM B 148 - Standard Specification for Aluminum-Bronze Sand Castings
- ASTM B 176 - Standard Specification for Copper-Alloy Die Castings
- ASTM B 271 - Standard Specification for Copper-Base Alloy Centrifugal Castings
- ASTM B 369 - Standard Specification for Copper-Nickel Alloy Castings
- ASTM B 427 - Standard Specification for Gear Bronze Alloy Castings
- ASTM B 505 B/505M - Standard Specification for Copper-Base Alloy Continuous Castings
- ASTM B 584 - Standard Specification for Copper Alloy Sand Castings for General Applications
- ASTM B 633 - Zinc Coating Electrodeposited
- ASTM B 763 - Standard Specification for Copper Alloy Sand Castings for Valve Application
- ASTM B 770 - Standard Specification for Copper-Beryllium Alloy Sand Castings for General Applications
- ASTM B 806 - Standard Specification for Copper Alloy Permanent Mold Castings for General Applications

(Copies of these documents are available from WWW.astm.org or ASTM International, 100 Barr Harbor Drive, west Conshohocken, PA. 19428-2959)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS

ASME B 1.20.3 - Dryseal Pipe Threads (Inch)-Revision and Redesignation of B2.2-1968

(Copies of these documents are available from WWW.asme.org or ASME information Central Orders/ Inquiries, P.O. Box 2300, Fairfield, NJ 07007-2300.)

SAE INTERNATIONAL

SAE AMS 4842D - Castings, Leaded Bronze, Sand and Centrifugal 80Cu - 10Sn - 9.5Pb a
as Cast (UNS C93700)

SAE AMS 4845G - Tin Bronze Castings Sand and Centrifugal 87.5Cu - 10Sn - 2Zn as
Cast


SAE AMS 4855F - Leaded Red Brass, Sand and Centrifugal Castings 85Cu - 5.0Sn -
5.0Pb – 5.0Zn as Cast UNS C83600

SAE AMS 4860E - Manganese Bronze, Sand and Centrifugal Castings 58Cu - 39Zn -
1.2 – 1.0Al –0.80 Mn as Cast UNS C86500


SAE AMS 4862F - Manganese Bronze, Sand and Centrifugal Castings 63Cu - 24Zn –
6.2Al - 3.8Mn - 3.0Fe High Strength, as Cast-UNS C86300

SAE AMS 4890B - Copper-Beryllium Alloy Castings 97Cu - 2.1Be - 0.52Co - 0.28Si
Solution Heat Treated (TB00) (UNS C82500)

(Copies of these documents are available online at www.sae.org or SAE World Headquarters
400 Commonwealth Drive Warrendale, PA 15096-0001 USA

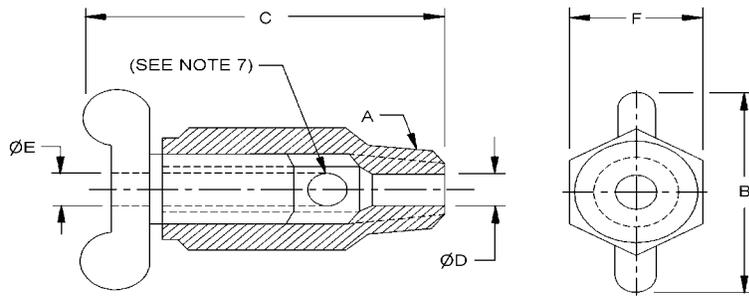

INTERNAL SEAT

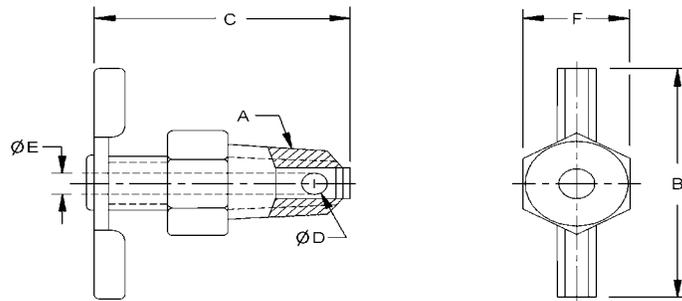

EXTERNAL SEAT

Figure 1 Cock, Drain, Center Drain 150 psig Water, Oil, Gas at 150 degrees Fahrenheit

Internal Seat

Dash No.	A Pipe Thread NPTF	B MAX in	B mm (Ref)	C Open Max. in	C mm (Ref)	D Dia. Min. in	D mm (Ref)	E Dia. Min. in	E Mm (Ref)
001	1/8-27	1.38	(34.0)	1.88	(47.8)	.19	(4.8)	.12	(3.1)
002	1/4-18	1.50	(38.1)	2.00	(50.8)	.19	(4.8)	.19	(4.8)
003	3/8-18	1.50	(38.1)	2.00	(50.8)	.31	(7.9)	.31	(7.9)

External Seat

Dash No.	A Pipe Thread NPTF	B Max in	B mm	C Open Max in	C mm	D Dia Min in	D mm	E Dia Min in	E mm
004	1/8-27	1.31	(33.3)	.90	(22.86)	.09	(2.3)	.12	(3.0)
005	1/4-18	1.38	(35.1)	1.00	(25.4)	.16	(4.1)	.19	(4.8)
006	3/8-18	1.69	(42.93)	1.44	(36.6)	.16	(4.1)	.19	(4.8)
007	1.2-14	2.00	(50.8)	1.62	(41.1)	.31	(7.9)	.38	(9.7)
008	1-11 1/2	2.50	(63.5)	2.31	(58.7)	.53	(13.5)	.75	(19.1)

NOTES:

1. Material. Brass conforming to: ASTM B16/B16 M, ASTM B22, ASTM B30, ASTM B 36/B 36 M, ASTM B 61, ASMT B62, ASTM B121/ B 121 M, ASTM B 124B/B A24 M, ASTM B176, ASTM B 148, ASTM B176, ASTM B 271, ASTM B 369, ASTM B 505/B 505 M, ASTM B 584, ASTM B 763, ASTM B 770, or SAE AMS 4842DM, SAE AMS 4845G, SAE AMS 4855F, SAE AMS 4860E, SAE AMS 4862F, SAE AMS 4890B.
2. Handle may be steel conforming to QQ-S-698.
3. Protective Coating. Brass, none ; Steel per ASTM B633
4. Threads : Threads are Dryseal NPTF per ASME B1.20.3. Each of the letters in the symbols has a definite significance as follows: N = National (American) Standards; P = Pipe; T = Taper; F= Fuel and Oil. NPTF dryseal threads seal pressure tight joints without sealant compound. ANSI B1.20.3 explains the engineering principle and engineering design.
5. Tolerances. Unless otherwise specified tolerances +/- .010.
6. Test Pressures. Shell 150 psig, Seat 50 psig.
7. Hex Flat. Measurement across flats of Hexagonal Wrench Pad shall be a standard measurement under
8. Hole "E". The diameter of this hole is same as dimension "E".
9. Optional designs. The illustration is for identification purposes only is not intended to restrict designs or shapes not dimensioned
10. Dual dimensions. Parenthetic metric dimensions are for references only
11. Applications. This item is for use in non-flammable liquid or gas systems where pressures do not exceed 150 psig for Water, Oil and Gas, (WOG) at 150 F temperature.
12. Drawing came from MS35782

Commercial Products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

86520	Conbraco Industries, Inc. P.O. Box 247 Matthews, NC 28106-0247 Phone: (704) 841-6135 Conbraco Industries, Inc.
79470	Eaton Corp 14615 Loneoak Rd. Edenperry, MN 55344 952-294-2032/888-258-0222 jeffenoe@eaton.com
93061	Parker-Hannifin Corp Brass Products Division 300 Parker Drive Otsego, MI 49708-1472

260-636-2104
dwsanders@Parker.com

20969

Essex Brass Corp
23500 Pinewood
Warren, MI 48091-3122
586-757-8200
bpushman@essexbrass.com

Part number (P/N) supersession data . These CID P/Ns in table II supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N suppression data.

Dash number (see table I)	MFR's CAGE	MFG's P/N ^{1/}
AA59440ss1-001	See slash sheet	See slash sheet
AA59440ss2-001	See slash sheet	See slash sheet
AA59440ss3-001	See slash sheet	See slash sheet
AA59440ss4-001	See slash sheet	See slash sheet
AA59440ss5-001	See slash sheet	See slash sheet
AA59440ss6-001	See slash sheet	See slash sheet
AA59440ss7-001	See slash sheet	See slash sheet
AA59440ss8-001	See slash sheet	See slash sheet

^{1/} The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products reviewed and could be replaced by the CID PIN shown. For actual part marking requirements (see 3.10).

Marginal notations. Marginal notations are not used in this revision to identify changes due to the extent of the changes.

CIVIL AGENCIES AND COORDINATING ACTIVITIES:

MILITARY INTERESTS:

GSA – FSS

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA – CC

(Project 4820-0881-000)

Review activities:
Army - AT, AV, MI
NAVY – MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://www.dodssp.daps.mil>.