


COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER BLOCK, POWER-SAFE, DEAD-FRONT, 30 AMPERES, 3 POLES,
ACCOMODATES UNDERWRITER LABORATORY (UL) CLASS J FUSE CARTRIDGES

The General Services Administration has authorized the use of this
Commercial Item Description (CID) for all federal agencies.

The complete requirements for procuring the fuseholders described herein shall consist of this document
and the issue in effect of CID A-A-59747.

CLASSIFICATION. This CID uses a classification system that is included in the Part Identification
Number (PIN) as shown in the following example (see notes).

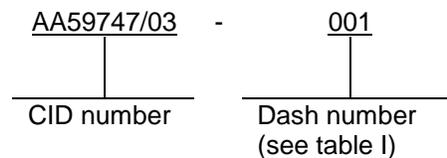

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuseholders supplied to this CID shall be as specified herein (see
figure 1).

Ampere rating. The ampere rating shall be 30 amperes maximum.

Voltage rating. The voltage rating shall be 600 V ac maximum.

Fuseholder accommodation. This fuseholder accepts class J fuses.

Blown fuse indicator. Applicable fuseholders shall be supplied with a blown fuse indicator light in handle
(see table I.)


TABLE I. Electrical characteristics.

AA59747/03-	Blown fuse indication
001	Nonindicating
002	Indicating

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See
section 2 for PIN format example.

A-A-59747/3

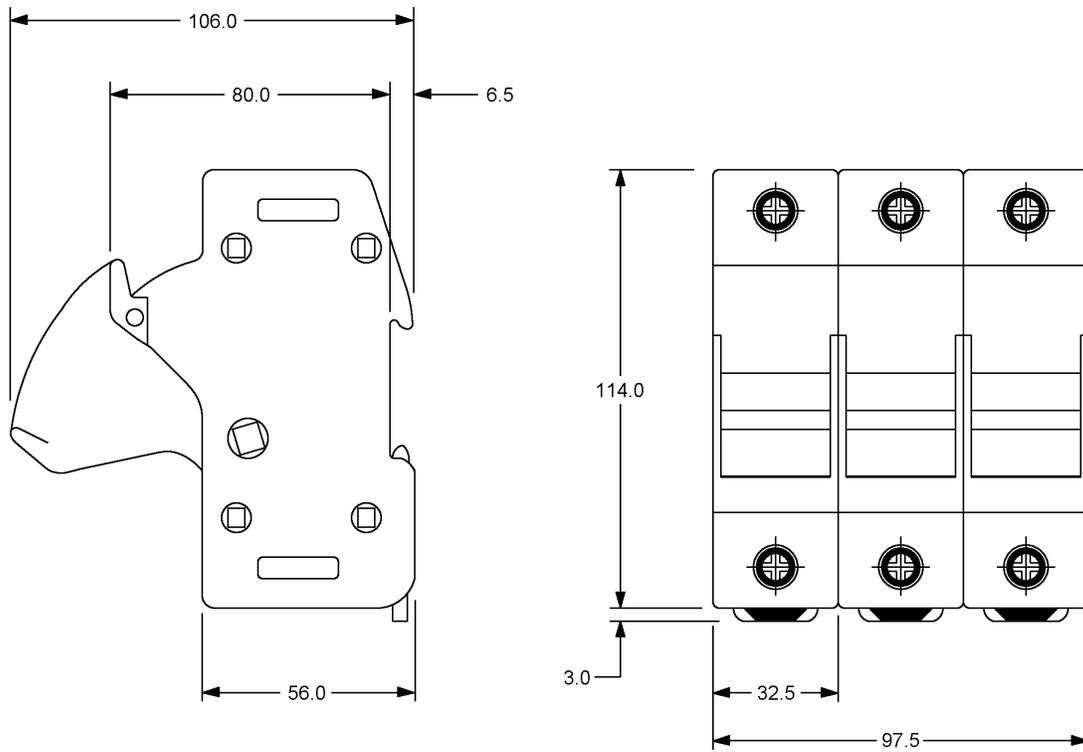

mm	Inches
3.0	0.118
6.5	0.256
32.5	1.280
56.0	2.205
80.0	3.150
97.5	3.839
106.0	4.173

NOTES:

1. Dimensions are in inches.
2. Tolerance is ± 0.13 mm ($\pm .005$ inch), unless otherwise specified.

FIGURE 1. Configuration and dimensions.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

<u>Manufacturer's CAGE</u>	<u>Manufacturer's name and address</u>
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone number (847) 824-1188 Facsimile number (847) 391-0894 E-mail: electronics@littelfuse.com URL: www.littelfuse.com

Part number (P/N) supersession data. This CID supersedes the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I)	MFR's CAGE 75915
AA59747/03-	MFR's P/N <u>1/</u>
001	LPSJ30-3
002	LPSJ30-3ID

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:

DLA-CC

Project 5920-0763-03