


COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER BLOCK, DEAD-FRONT, 60 AMPERES, ACCOMMODATES, CLASS J FUSE CARTRIDGES, GENERAL REQUIREMENTS FOR

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. **SCOPE.** This CID covers the general requirements for UL listed class J fuseholder blocks. Requirements for specific fuseholders are covered in the individual CID sheets. Fuseholders covered by this CID are intended for commercial/industrial applications.
2. **CLASSIFICATION.** This CID uses a classification system that is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

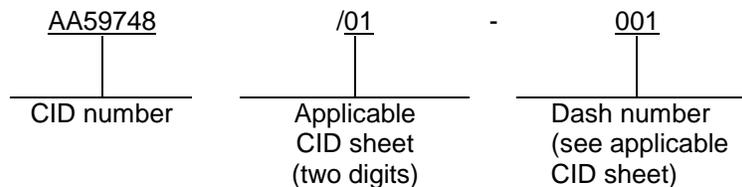

3. SALIENT CHARACTERISTICS.

- 3.1 Interface and physical dimensions. Fuseholders supplied to this CID shall be as specified on the applicable CID sheet.
- 3.2 Voltage rating. The voltage rating shall be 600 V ac maximum.
- 3.3 Ampere rating. The ampere rating shall be 60 amperes maximum.
- 3.4 Interrupting rating. The interrupting rating shall be 200 kA.
- 3.5 Wire termination. Fuseholders shall be supplied with pressure plate terminals that accept #2 through #14 CU wire sizes. Suggested torque of 45 inch-pounds shall be used.
- 3.6 Fuseholder body material. The fuseholder body material shall be thermoplastic with a UL 94VO flammability rating as a minimum.
- 3.7 Marking. Fuseholders supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN.
- 3.8 Mounting. This fuseholder shall be 35 mm Din-Rail mountable.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

4. REGULATORY REQUIREMENTS.

4.1 Recycled/recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

- a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 6 months.
- b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 6 months.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuseholders to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents. This section is not applicable to this CID.

7.4 Ordering data. The contract or order should specify the following:

- a. CID document number, revision, and CID PIN.
- b. Product conformance provisions.
- c. Packaging requirements.

7.5 Government users. To acquire information on obtaining these fuseholders from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CSB, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7962.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE
Preparing activity:
DLA-CC
Project 5920-0764