

MIL-C-17/155A  
18 July 1985  
SUPERSEDING  
MIL-C-17/155  
23 February 1982

MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, COAXIAL,  
50 OHMS, M17/155-00001

THIS CABLE USES PVC MATERIAL AND IS NOT  
TO BE USED IN AEROSPACE APPLICATIONS.

NOTE: THE AIR FORCE HAS RESTRICTED THE USE OF PVC IN  
AEROSPACE AND GROUND SUPPORT APPLICATIONS. CABLES  
WITH PVC JACKETING SHALL BE USED FOR RETROFIT PURPOSES  
ONLY UNTIL AN ALTERNATE JACKET IS APPROVED.

This specification is approved for use by all Depart-  
ments and Agencies of the Department of Defense.

The complete requirements for acquiring the cable described herein shall  
consist of this specification and the latest issue of MIL-C-17.

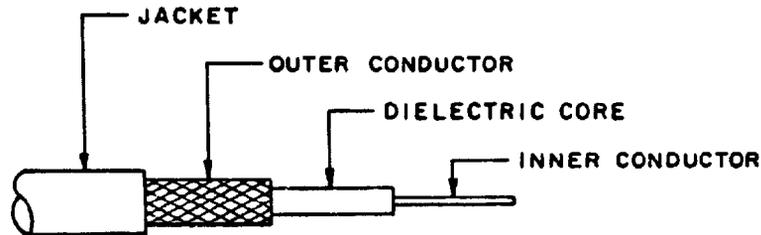


FIGURE 1. Configuration.

Ⓐ denotes changes

FSC 6145

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

TABLE I. Description.

Component	Construction details															
Inner conductor	Nineteen strands of tinned copper wire, each strand 0.0072 inch diameter. Overall diameter: 0.0355 inch $\pm$ 0.0020.															
Dielectric core	Type A-1: Solid polyethylene. Diameter: 0.116 inch $\pm$ 0.004.															
Outer conductor	Single braid of AWG No. 36 tinned copper wire. Diameter: 0.150 inch maximum.  <table> <thead> <tr> <th></th> <th></th> <th>Alternate</th> </tr> </thead> <tbody> <tr> <td>Coverage</td> <td>: 92.8% nominal</td> <td>94.2% nominal</td> </tr> <tr> <td>Carriers</td> <td>: 12</td> <td>16</td> </tr> <tr> <td>Ends</td> <td>: 9</td> <td>7</td> </tr> <tr> <td>Picks/inch:</td> <td>7.7 <math>\pm</math>10%</td> <td>10.3 <math>\pm</math>10%</td> </tr> </tbody> </table>			Alternate	Coverage	: 92.8% nominal	94.2% nominal	Carriers	: 12	16	Ends	: 9	7	Picks/inch:	7.7 $\pm$ 10%	10.3 $\pm$ 10%
		Alternate														
Coverage	: 92.8% nominal	94.2% nominal														
Carriers	: 12	16														
Ends	: 9	7														
Picks/inch:	7.7 $\pm$ 10%	10.3 $\pm$ 10%														
Jacket	Type I1a: PVC. Diameter: 0.195 inch $\pm$ 0.004.															

CAUTION IS DIRECTED TO THE APPLICATION OF THIS CABLE ABOVE 400 MHZ. ATTENUATION IS TESTED ONLY AT 400 MHZ. SRL AND POWER HANDLING CAPABILITIES ARE NOT STIPULATED HEREIN.

## ENGINEERING INFORMATION:

Continuous working voltage: 1,400 V rms, maximum.

Velocity of propagation: 65.9 percent, nominal.

Operating temperature range:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

Inner conductor properties:

(A) DC resistance (maximum at  $20^{\circ}\text{C}$ ): 1.240 ohms per 100 feet.

(A) Elongation: 10 percent, minimum.

Tensile strength: Not applicable.

Engineering note: This cable is useful in general purpose low temperature applications. (See connector series "TNC", "BNC", and "SMA" per MIL-C-39012.)

## REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.

Environmental and mechanical:

Visual and mechanical:

Out-of-roundness: Not applicable.

Eccentricity: 10 percent, maximum.

Adhesion of conductors:

- Ⓐ Inner conductor to core: 5 pounds, minimum; 15 pounds, maximum.

Aging stability:  $+98^{\circ} \pm 2^{\circ}\text{C}$ .

Stress crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

- Ⓐ Cold bend:  $-55^{\circ}\text{C} \pm 2^{\circ}\text{C}$ .

Dimensional stability:  $+85^{\circ} \pm 2^{\circ}\text{C}$ .

Inner conductor from core: 0.062 inch, maximum.

Inner conductor from jacket: 0.125 inch, maximum.

Contamination: Applicable.

Bendability: Not applicable.

Flammability: Not applicable.

- Ⓐ Weight: 0.026 pound per foot, maximum.

Electrical:

Continuity: Applicable.

- Ⓐ Spark test: 5,000 V rms, +10%, -0%.

- Ⓐ Voltage withstanding: 5,000 V rms, +10%, -0%.

Insulation resistance: Not applicable.

Corona extinction voltage: 1,900 V rms, minimum.

Characteristic impedance: 50 ohms  $\pm 2$ .

Attenuation: 17.0 dB/100 ft maximum at 400 MHz.

Structural return loss: Not applicable.

- Ⓐ Capacitance: 32.2 pF per foot, maximum.

Capacitance stability: Not applicable.

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Part number: See table II.

Supersession data: See table II.

TABLE II. Cross-reference of part number.

Part number	Superseded part number or type designation
M17/155-00001	RG-58C/U per MIL-C-17D

Custodians:

Army - CR  
Navy - EC  
Air Force - 95

Preparing activity:

Army - CR

(Project 6145-0911-33)

Review activities:

Army - MI  
Navy - SH, TD  
Air Force - 11, 17, 99  
DLA - ES, IS

User activities:

Army - AR, AT, ME  
Navy - AS, MC, OS  
Air Force - 19

Agent:

DLA - ES