

INCH-POUND

MIL-C-17/191B
20 February 1991

SUPERSEDING
MIL-C-17/191A(EC)
10 August 1987

MILITARY SPECIFICATION SHEET

CABLE, RADIO FREQUENCY, FLEXIBLE, COAXIAL,
75 OHMS, M17/191-00001

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist
of this specification sheet and the issue of the following specification
listed in that issue of the Department of Defense Index of Specifications
and Standards (DODISS) specified in the solicitation: MIL-C-17.

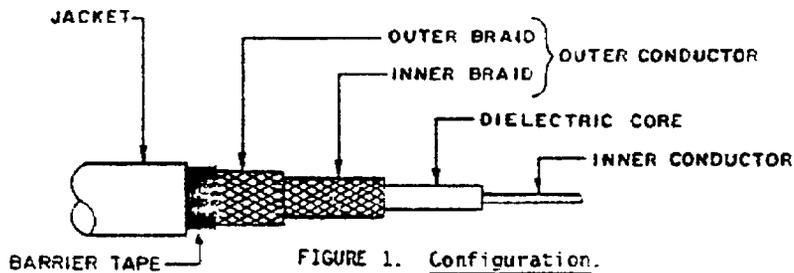


TABLE I. Description.

Components	Construction details
Inner conductor	Seven strands of tinned copper wire at 0.159 inch each. Overall diameter: .0477 inch \pm .0020.
Dielectric core	Type A-1: Solid polyethylene. Diameter: .285 inch \pm .007.
Outer conductor	Double braid of AWG No. 34 copper wire. Diameter: .355 inch maximum.
Inner braid	Coverage: 95.4% nominal Carriers: 24 Ends: 9 Picks/inch: 6.5 \pm 10%
Outer braid	Coverage: 93.6% nominal Carriers: 24 Ends: 8 Picks/inch: 10.3 \pm 10%

MIL-C-17/1918

TABLE I. Description - Continued.

Components	Construction details
Barrier tape	A .001 inch thick polyester tape faced with a .002 inch thick layer of aluminum. The tape will be applied with a 50% lap, aluminum face toward the outer conductor. Diameter: .365 inch maximum.
Jacket	Cross-linked polyolefin Diameter: .425 inch \pm .007.

ENGINEERING INFORMATION:

Continuous working voltage: 3,700 V rms, maximum.

Operating frequency: 3 GHz, maximum.

Velocity of propagation: 65.9 percent, nominal.

Power ratings: See figure 2.

Operating temperature range: -30°C to +85°C.

Inner conductor properties:

DC resistance (maximum at +20°C): 0.66 ohm per 100 feet.

Elongation: 15 percent, minimum.

Engineering notes: This cable is useful in general purpose, medium low temperature applications. (See connector series "N" in accordance with MIL-C-39012.) These cables were redesigned to meet the vertical flame test.

REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.

Environmental and mechanical:

Visual and mechanical examination: Applicable.

Out-of-roundness: Applicable.

Eccentricity: 10 percent, maximum.

Adhesion of conductors:

Inner conductor to core: 7 pounds, minimum; 50 pounds, maximum.

Aging stability: +98°C \pm 2°C.

Cold bend: -30°C \pm 2°C.

Stress crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

MIL-C-17/191B

Dimensional stability: +85°C ±2°C.

Inner conductor from core: .062 inch, maximum.

Inner conductor from jacket: .125 inch, maximum.

Contamination: Not applicable.

Bendability: Not applicable.

Flammability: Not applicable.

Flame propagation: Applicable.

Acid gas generation: 2.0 percent, maximum.

Halogen content: 0.2 percent, maximum.

Immersion test:

Tensile strength, percent of unaged minimum: 50

Elongation, percent of unaged minimum: 50

Smoke index: 25 maximum.

Toxicity index: 5 maximum.

Durometer hardness: (Type A) 80 minimum.

Weathering: Applicable.

Abrasion resistance: 75 cycles minimum (jacket only).

Tear strength: 35 pounds per inch minimum.

Heat distortion: 30 percent maximum distortion.

Physical tests on unaged jacket:

Tensile strength: 1,300 psi, minimum.

Elongation, 160 percent, minimum.

Physical tests on aged jacket:

Air oven:

Tensile strength, percent minimum: 60

Elongation, percent minimum: 60

Hot oil immersion:

Tensile strength, percent minimum: 50


Elongation, percent minimum: 50

Tensile strength and elongation: 1,300 psi, 160 percent minimum.

Weight: 13.9 pounds per 100 feet maximum.

MIL-C-17/191B

WATTS
PER 100 FT

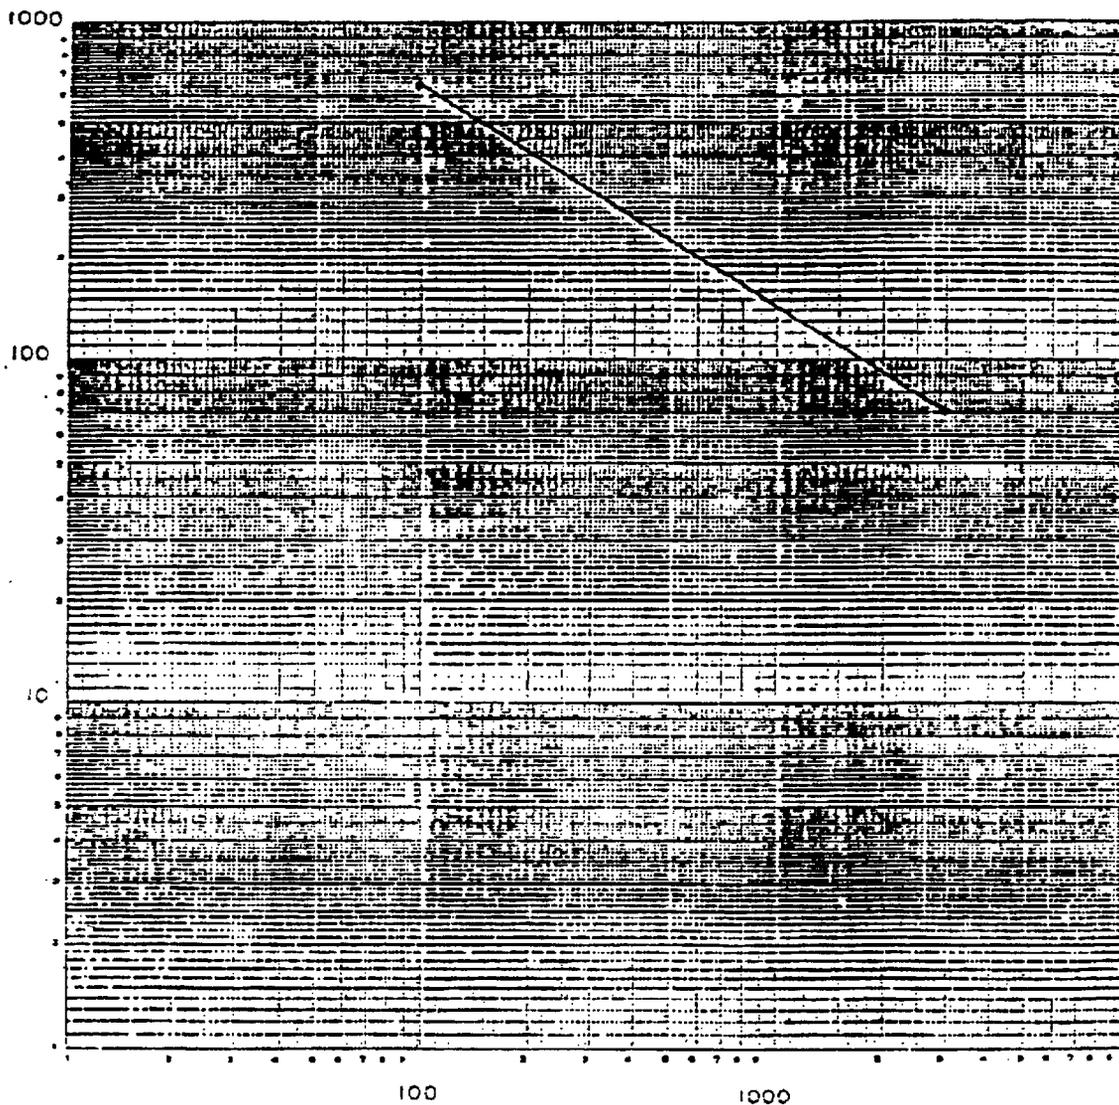

Maximum power at 25°C, sea level

FREQUENCY IN MHz

MHz	Watts
100	650
400	270
1000	150
2000	90
3000	70

FIGURE 2. Power rating

MIL-C-17/1918

Electrical:

Spark test: 5,000 V rms, +25, -0 percent.

Voltage withstanding: 10,000 V rms, minimum.

Insulation resistance: Not applicable.

Corona extinction voltage: 5,000 V rms minimum.

Characteristic impedance: 75 ±3 ohms.

Attenuation:

6.5 dB per 100 feet, maximum, at 400 MHz.

23.0 dB per 100 feet, maximum, at 3.0 GHz.

Structural return loss: Not applicable.

Capacitance: 22 pF per foot, maximum.

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Part or Identifying Number (PIN): M17/191-00001.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - EC
Air Force - 85

Review activities:

Army - AR, MI
Navy - SH
Air Force - 11, 80, 99
DLA - ES, IS

User activities:

Army - AT, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6145-1176-12)