

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


User activities

Army - CG, MC, OS, SH  
Navy - YD  
Air Force - 14, 19

Review activities

Army - AR, MI  
Navy - AS, YD  
Air Force - 11, 99

FED SUP CLASS  
5935

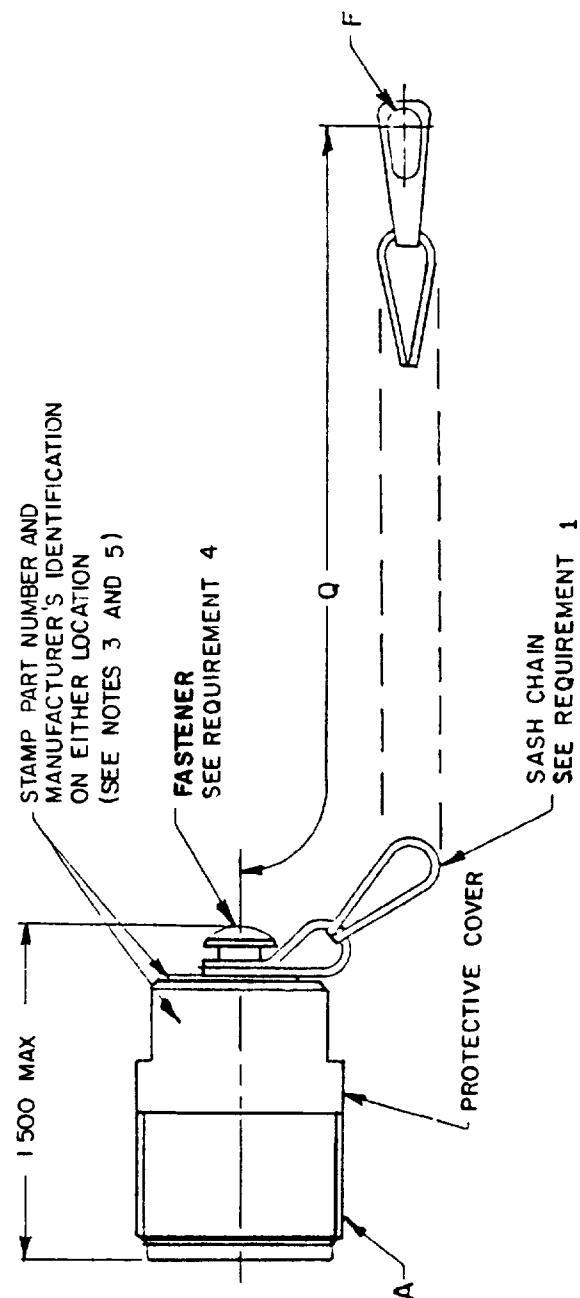

(C) ENTIRE STANDARD REVISED

PA Navy - EC Other Cust Army - CR AF - 85	International Interest	TITLE COVER, PROTECTIVE, CONNECTOR, PLUG	MILITARY STANDARD MS17350
Procurement Specification MIL-L-22992		SUPERSEDES	PAGE 1 OF 3

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

1 MAY 73  
AMSC N/A

DISTRIBUTION STATEMENT A

Approved for public release, distribution is unlimited

5935-3695-08

APPROVED 2 Oct 61 REVISED (C) 12 AUGUST 1987

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities Army - CG, MC, OS, Sh  
Navy - CG, MC, OS, Sh  
Air Force - 14, 19

Review activities Army - AR, MI  
Navy - AS, YD  
Air Force - 11, 99

FED SUP CLASS  
5935

Cover size	A Thread class 2A	Q See req 1	F See note 4
12	.8750-0.1P-0.2L-DS	5.00	6
14	1.0000-0.1P-0.2L-DS	5.00	6
16	1.1250-0.1P-0.2L-DS	5.00	6
18	1.2500-0.1P-0.2L-DS	5.00	8
20	1.3750-0.1P-0.2L-DS	5.00	8
22	1.5000-0.1P-0.2L-DS	6.00	8
24	1.7500-0.1P-0.2L-DS	6.00	8
28	2.0000-0.1P-0.2L-DS	6.00	8
32	2.2500-0.1P-0.2L-DS	6.00	10
36	2.5000-0.1P-0.2L-DS	6.00	10
40	2.7500-0.1P-0.2L-DS	6.00	10
44	3.0000-0.1P-0.2L-DS	6.00	10

Inches	mm	Inches	mm
.8750	22.225	2.0000	50.800
1.0000	25.400	2.2500	57.150
1.1250	28.575	2.5000	63.500
1.2500	31.750	2.7500	69.850
1.3750	34.925	3.0000	76.200
1.5000	38.100	5.00	127.0
1.500	38.10	6.00	152.4
1.7500	50.800		

P A Navy - EC  Other Cust Army - CP AF - BS	International interest	TITLE COVER PROTECTIVE, CONNECTOR, PLUG	MILITARY STANDARD  MS17350
Procurement Specification MIL-C-22992	SUPERSEDES		PAGE 2 OF 2

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE  
1 MAY 73

APPROVED 2 Oct 1961 REVISED C ENTIRE STANDARD REVISED

FED SUP CLASS  
5935

#### REQUIREMENTS

1. Chain shall be passivated stainless steel in accordance with type II, class 3, trade number 8 of RR-C-271 and shall be within one link of length specified.
2. Cover is used for MS17344.
3. Cover finish shall be designated by the letter C (Conductive) or N (Nonconductive).
4. Chain shall move freely on protective cap after assembly.
5. The part number shall include finish and size as shown in example below. The cover shall be marked with the part number only when procured as a separate part.



#### NOTES:

1. All dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are  $\pm .016$  (0.41 mm).
4. F clearance to accommodate screw size indicated.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

P A Navy - EC Other Cust Army - CP AF - 85	International Interest	TITLE COVFP, PROTECTIVE, CONNECTOR, PLUG	MILITARY STANDARD  MS17350
Procurement Specification MIL-C-22992	SUPERSEDES		PAGE 3 OF 3