FED. SUP CLASS
5935

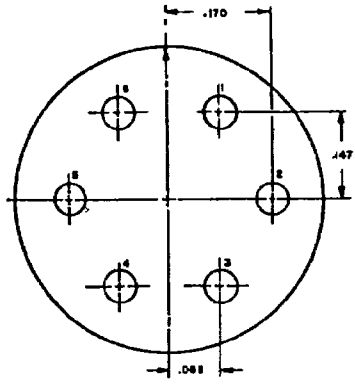

CONTACT: (a) # 20
SERVICE RATING: II

INSERT ARR 12-6

CONTACT:
SERVICE RATING

INSERT ARR.

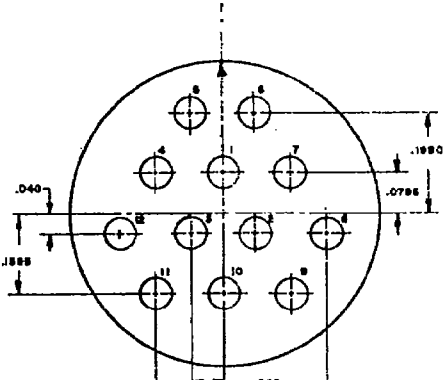

CONTACT (12) # 20
SERVICE RATING: I

INSERT ARR 12-50

(c)

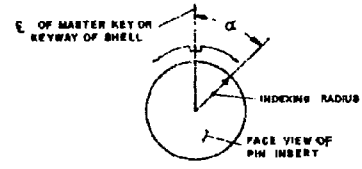

INSERT POSITION FIGURE

INSERT ARR.	INSERT POSITIONS α DEGREES (a)					
	N	W	X	Y	B	C
(c) 12-50	0°	18°	50°	76°	180°	226°
12-6	0°	28°	46°	80°	160°	220°

(a) ▲ TO BE WITHIN .006 INCHES OF THE REQUIRED POSITION.

(b) THESE INSERT POSITIONS ARE NOT TO BE PROVIDED.

(c) INSERT ARR. 12-50 SUPERSEDES AND IS INTERCHANGEABLE WITH INSERT ARR. 12.

DIMENSIONS AND MARKINGS SHOWN ARE FOR FRONT FACE OF PIN INSERT (SOCKET INSERT OPPOSITE). UNLESS OTHERWISE INDICATED, DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINE.

INDICATES "MASTER KEY OR KEYWAY OF SHELL."

▲ INDICATING TERMINUS OF "INDEXING RADIUS OF INSERT" SHALL BE PERMANENTLY MARKED ON THE INSERT IN "N" POSITION THE INDEXING RADIUS COINCIDES WITH ℄ OF THE "MASTER KEY OR KEYWAY OF SHELL."

IN OTHER THAN "N" POSITION THE PIN INSERT IS ROTATED α DEGREES CLOCKWISE RELATIVE TO ℄ OF THE "MASTER KEY OR KEYWAY OF SHELL" AS INDICATED.

IN OTHER THAN "N" POSITION THE SOCKET INSERT IS ROTATED α DEGREES COUNTER-CLOCKWISE RELATIVE TO ℄ OF THE "MASTER KEY OR KEYWAY OF SHELL."

DIMENSIONS IN INCHES. ANGLES IN DEGREES. TOLERANCES: DECIMALS ± .008.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

RECEPTACLES (Ref)

MS3130
MS3132
MS3134
MS3139
MS3140
MS3143
MS3144
MS3145
MS3149
MS3424
MS3463
MS3464
MS3466
MS3469

PLUGS (Ref)

MS3137
MS3138
MS3147
MS3148
MS3446
MS3467
MS3468
MS3445

APPROVED 14-MAY-59 REVISED (A) 28-FEB-61 (B) 6 SEPT 62 (C) 1-OCT-62 (D) 1 NOV 1965 (E) 18 Sept 1969 (F) 21 July 1971

P.A. NAVY-AS	International Interest	TITLE INSERT ARRANGEMENTS, ELECTRIC CONNECTOR, SHELL SIZE 12	MILITARY STANDARD
Other Cust			MS 33700 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 1

DD FORM 10 APR 64

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.