

DETAIL SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION,
500 VOLTS ALTERNATING CURRENT/250 VOLTS DIRECT CURRENT, 30 AMPERE,
SYMBOL 2753 DPST

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-15743.

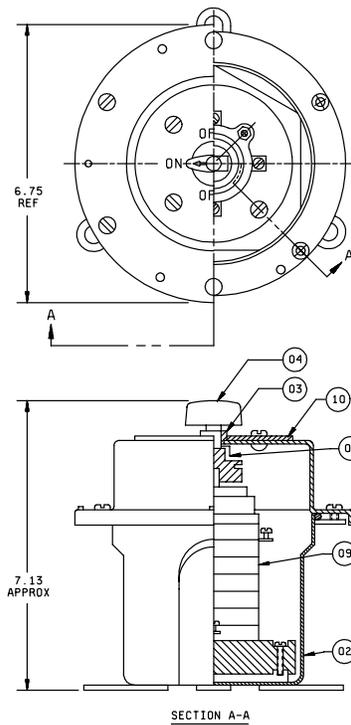


FIGURE 1. Switch, enclosed. ①

NOTES:

1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
 - Two place decimals - plus or minus 0.02.
 - Three place decimals - plus or minus 0.005.
 - Angular dimensions - plus or minus 30 minutes.

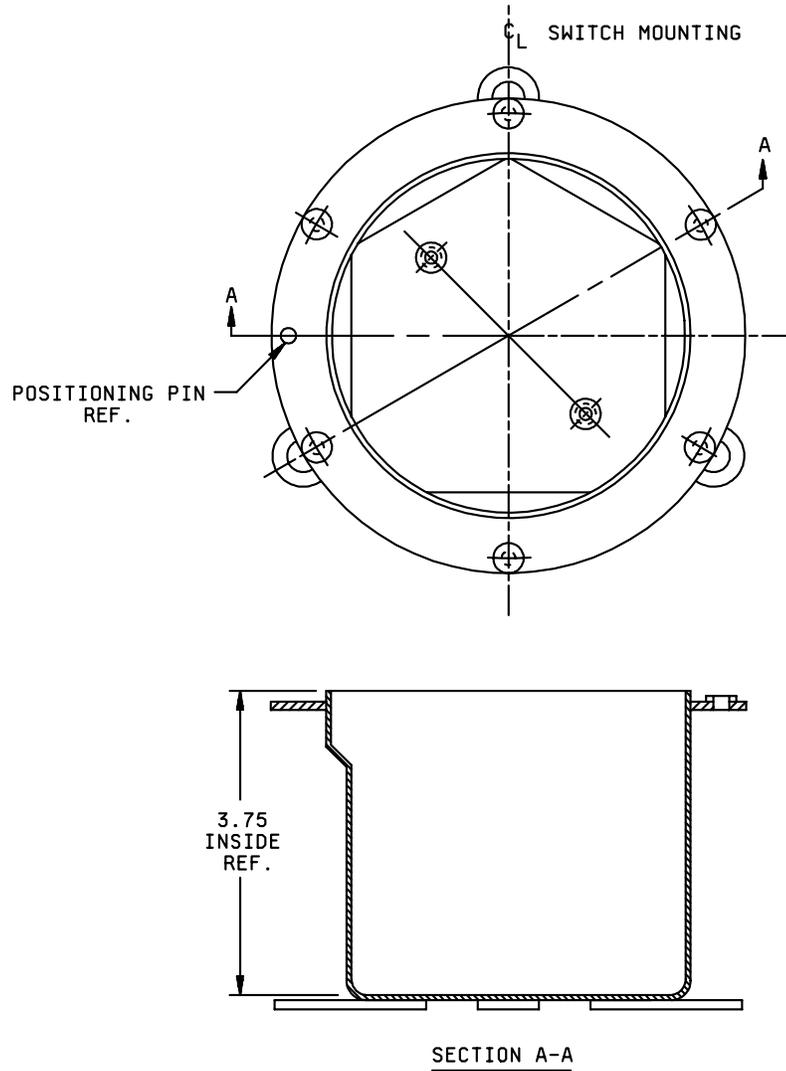


FIGURE 2. Box assembly.

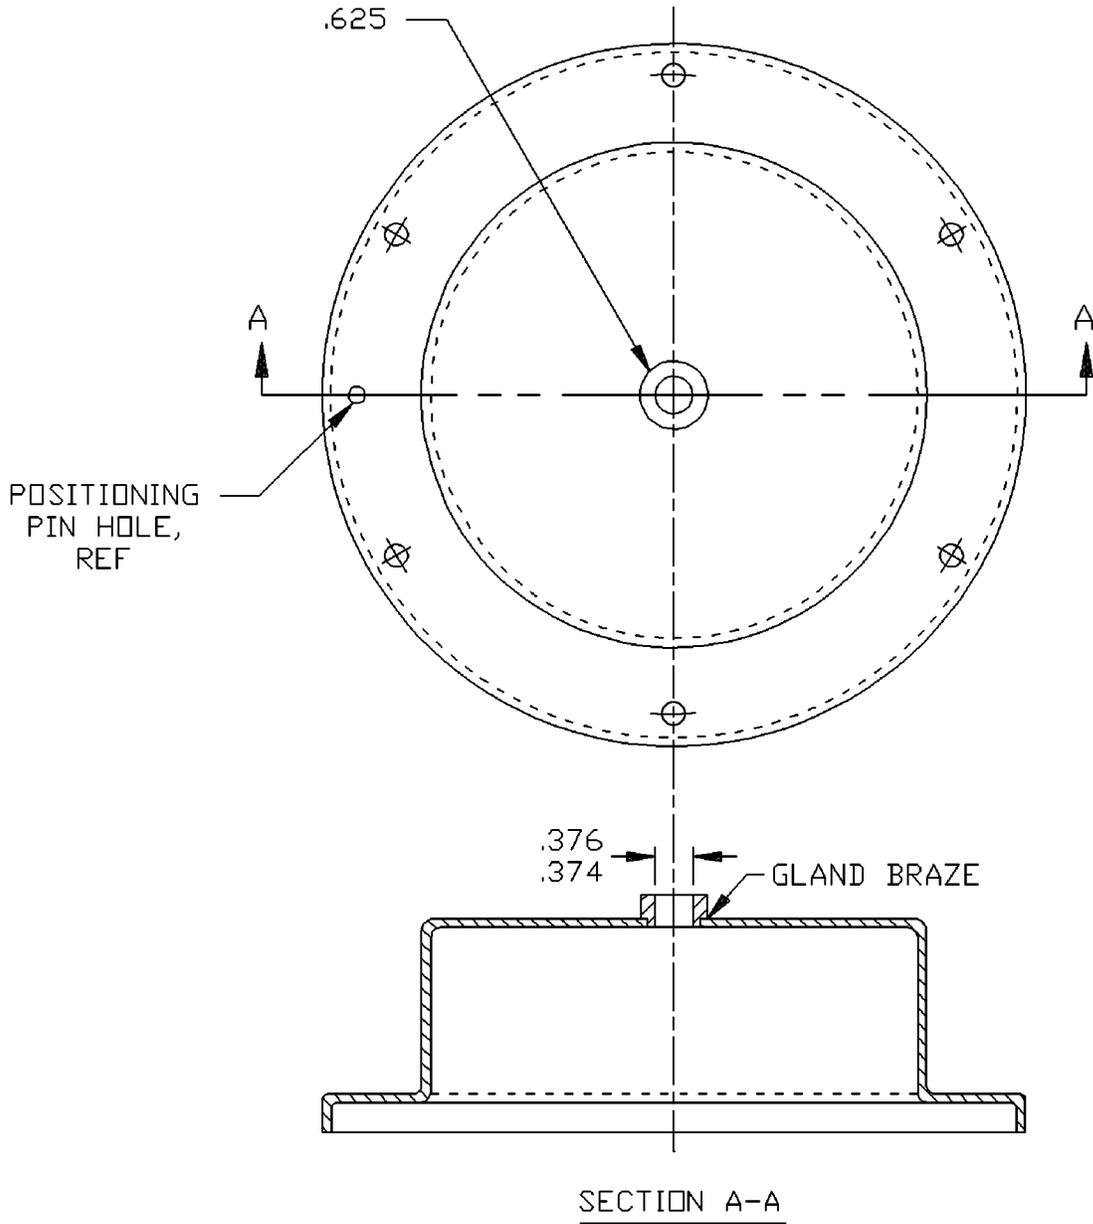


FIGURE 3. Cover assembly (modified).

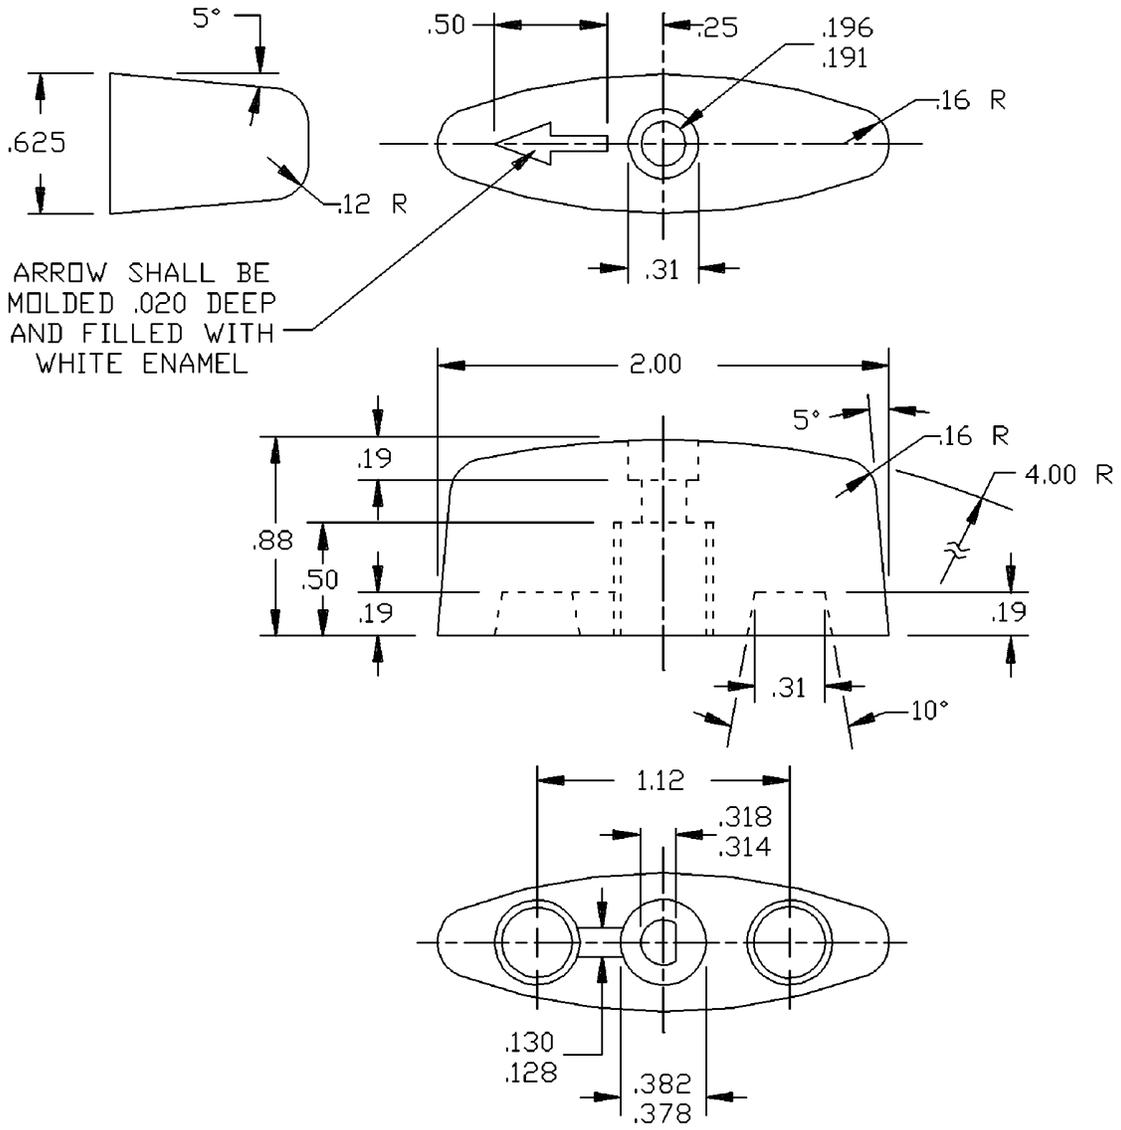


FIGURE 4. Handle. ④

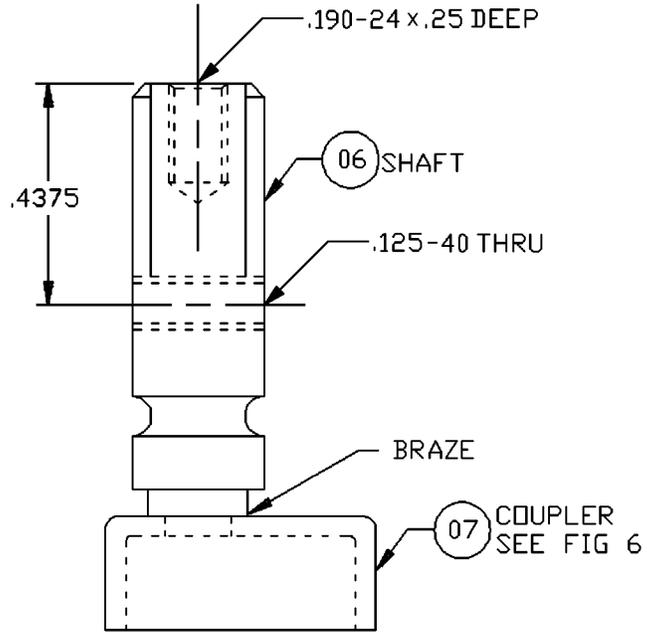


FIGURE 5. Shaft assembly. 05

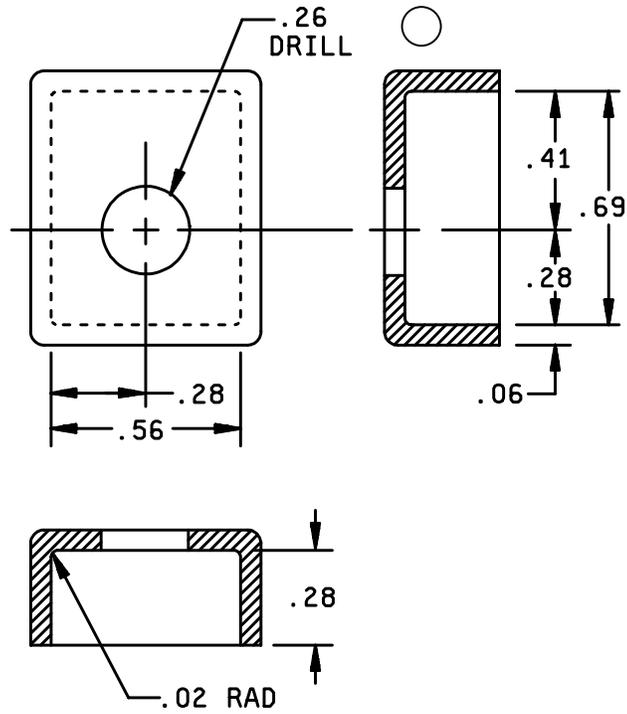


FIGURE 6. Coupler. 07

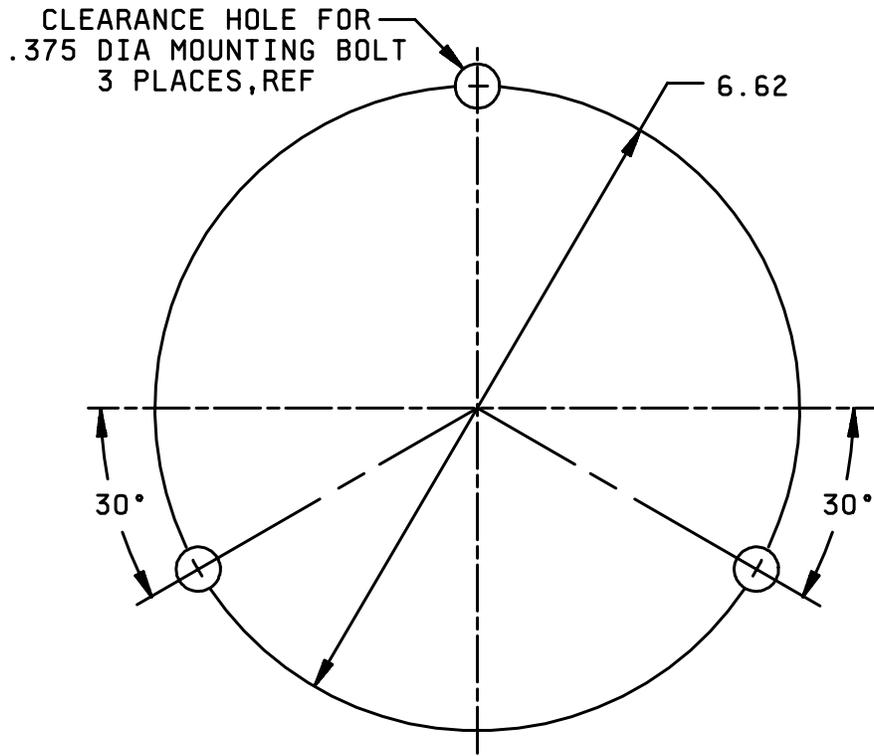


FIGURE 7. Mounting dimensions, ref.

MIL-DTL-15743/11B

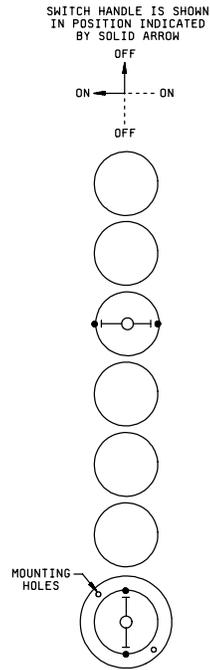


FIGURE 8. Wiring diagram. (08)

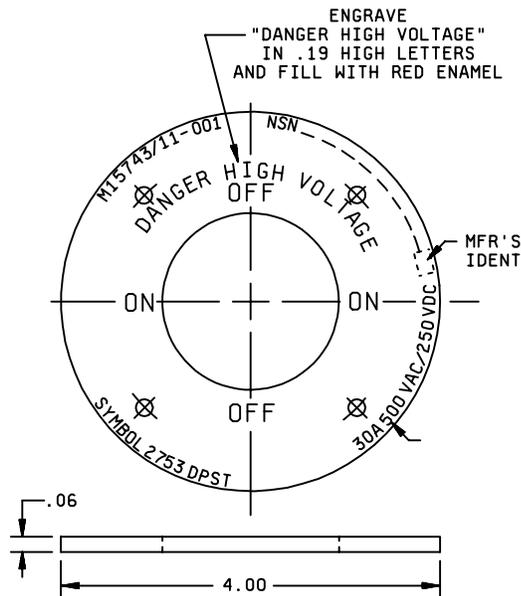


FIGURE 9. Identification plate. (10)

MIL-DTL-15743/11B

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 500 V ac, 60 Hz, 250 V dc, 0-30 ampere.

Dimensions and configuration: See figures 1 through 7.

Wiring diagram: See figure 8.

Mounting dimensions: See figure 7.

Degree of enclosure: Submersible (15 feet).

Weight: 6 pounds maximum.

Designation and marking: See figure 8 and 9.

Identification data shall be blank as shown on figure 9. Unless otherwise specified in the ordering data, switch action marking shall be as shown on figure 8.

Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes ^{1/}		
			Type	Unit	Sheet
M15743/11-001	2753	DPST	3SR2A4-2	8	9

^{1/} NAVSEA Drawing 9000-S6202-74276, in part.

ORDERING DATA:

Acquisition documents should specify the following:

Switch action marking, if required (see requirements).

MIL-DTL-15743/11B

TABLE II. Parts list.

Item no. <u>1</u> /	Description	Quantity M15743/10-001	Material/ specification	Remarks
01	Switch, enclosed (sym 2753)	-		See figure 1
02	Enclosure	1	Brass, MIL-E-24142/5 (modified)	M24142/5-003 See figure 2 & 3
03	O-ring	1	SAE-AS28775-010	----
04	Handle	1	Plastic, black, type CFI-10 or CFI-5 of ASTM-D5948	See figure 4
05	Shaft assembly	1	----	See figure 5
06	Shaft	1	Ni-Cu alloy of QQ-N-281	M15743/11-06
07	Coupler	1	Brass, ASTM B 36, ASTM B 121	See figure 6
08	Wiring diagram	1	MIL-E-2036	See figure 8
09	Switch (type 3SR2A4A)	1	MIL-S-15291/7	M15291/7-003
10	Identification plate	1	ASTM B 36, ASTM B 121	See figure 9

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1742-11)