


INCH- POUND

MIL-DTL-24308/26J
19 July 2000
SUPERSEDING
MIL-PRF-24308/26H
2 December 1996

DETAIL SPECIFICATION SHEET
CONNECTORS, ELECTRIC, RECTANGULAR,
MINIATURE, POLARIZED SHELL, RACK
AND PANEL, SCREW-LOCK ASSEMBLY, FEMALE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24308.

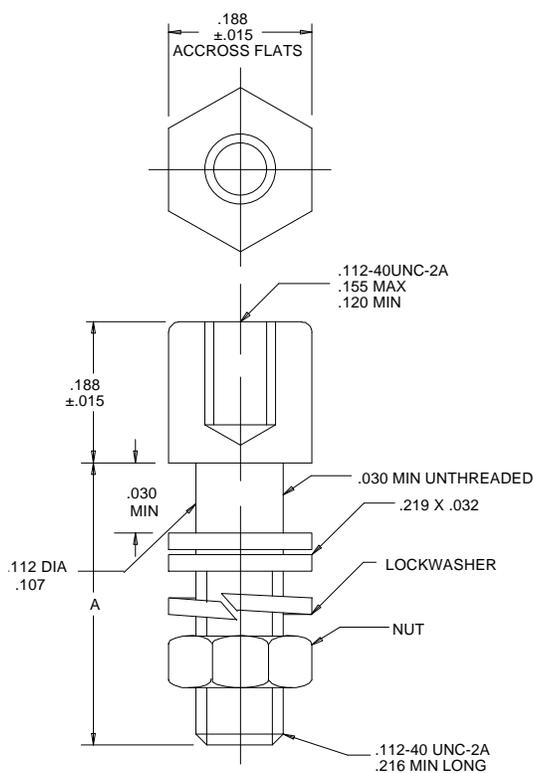

Inches	mm
.015	0.38
.030	0.76
.032	0.81
.107	2.72
.112	2.84
.120	3.05
.155	3.94
.188	4.78
.216	5.49
.219	5.56

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. When a connector using the alternate method of securing the shell (tab type) is front mounted, one flat washer shall be used as a spacer between the mounting surface and the connector.

FIGURE 1. Dimensions and configuration.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Cold rolled steel or corrosion resistant steel in accordance with ASTM-A-582.

Finish: Cold rolled steel - Yellow chromate over cadmium in accordance with QQ-P-416 or an equivalent industry standard when available, or yellow chromate over zinc in accordance with ASTM B633 or an equivalent industry standard available.

Corrosion resistant steel - Shall be passivated in accordance with ASTM A 967 or an equivalent industry standard available.

Qualification requirements: See MIL-DTL-24308/25.

Part or Identification Number (PIN) example: M24308/26-

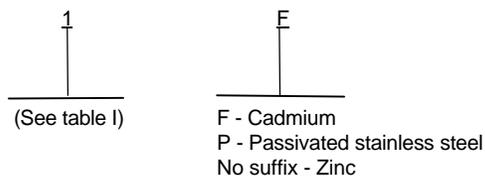


TABLE I. Dash number.

Dash no.	A ±.015
-1	.312
-2	.625

CONCLUDING MATERIAL

Custodians:

- Army - CR
- Navy - EC
- Air Force - 11
- NASA - NA
- DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4249-10)

Review activities:

- Army - AT, AV, CR-4, MI
- Navy - AS, CG, MC, SH
- Air Force - 99