

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR,
RACK AND PANEL, SOLDER TYPE SOCKET CONTACTS, SIZE 22

This amendment forms a part of MIL-C-28748/8E, dated 1 April 1993, and is approved for use by all Departments and Agencies of the Department of Defense.


PAGE 3

FIGURE 1, configuration D, Jacksocket (female): Delete “.960” and substitute “.920”.

PAGE 12

*FIGURE 3, configuration G, delete and substitute as follows:

“

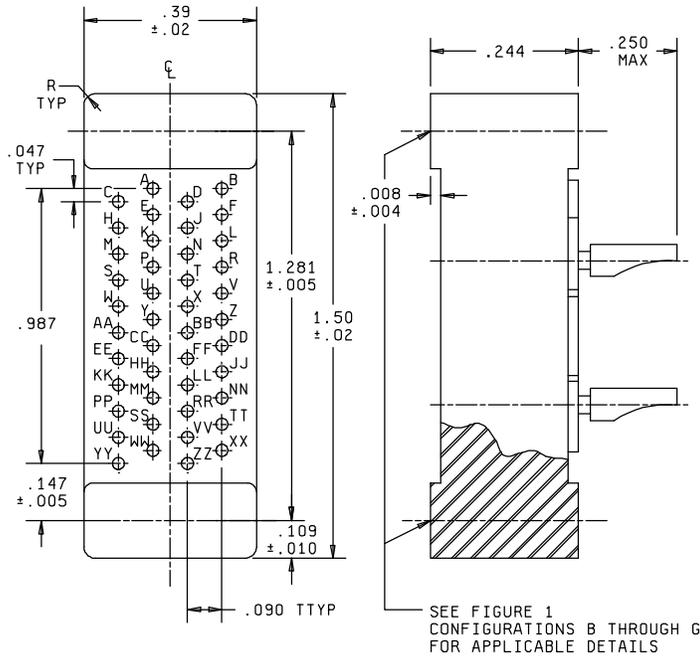

Insert with 44 contacts

”

MIL-C-28748/8E
AMENDMENT 3

PAGE 16

Jack and guide location, delete and substitute the following:

“The jackscrew male (turning or fixed) or guide pin shall be located by the A socket contact.”

NOTE: The margin of this amendment is marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the material notations and relationship to the last previous amendment.

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-4251)

Review activities:

Army – AM, AR
Navy - MC
Air Force - 80