

INCH POUND


MIL-DTL-3655/14B
4 October 1999
SUPERSEDING
MIL-C-3655/14A
11 April 1980

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CLASS I
(COAXIAL, SERIES TWIN, TWTNC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-C-3655.

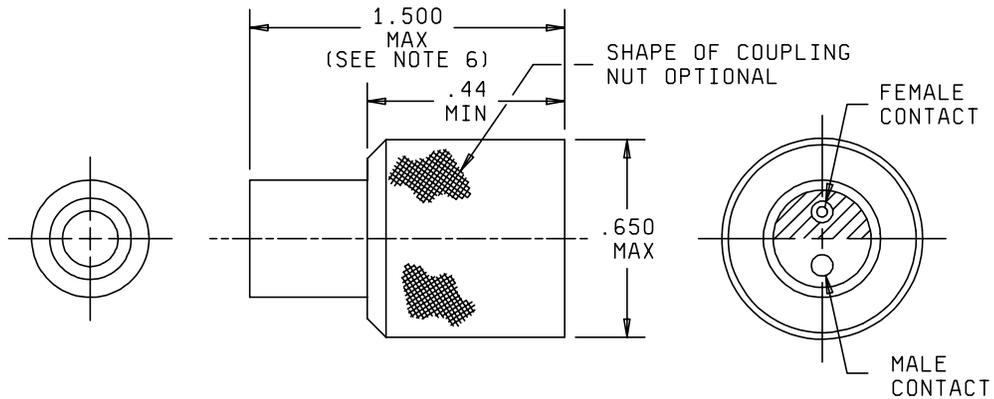

Inches	Mm
.44	11.2
.650	16.51
1.500	33.10

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Wrench flats are to accommodate standard wrench openings in accordance with H-28 appendix 10.
4. Unless otherwise specified, tolerance is $\pm .005$ (.13 mm).
5. All undimensioned pictorial configurations are for reference purposes only.
6. Dimensions define the maximum length of the connector when assembled to the appropriate cable.

FIGURE 1. Type TWTNC, electrical plug connector.

MIL-DTL-3655/14B

ENGINEERING DATA

Nominal impedance: 79 ohms.

Frequency range: DC to 500 MHz, maximum.

Voltage rating: 500 V rms, maximum.

Mating connector: MIL-DTL-3655/13 (see table I).

TABLE I. Connector to cable accommodation.

Connector Part or Identifying Number (PIN)	Cable accommodation <u>1/</u>
M3655/14-0001	M17/45-RG108 and M17/186-00001
M3655/14-0002	M17/182-00001
M3655/14-0003	M17/182-00002

1/ The latest version of each cable shall apply.

Captive contact retention: 6 pounds, axial.

Intended use: Type MIL-DTL-3655/14 electrical connectors are intended for use with various types of twin axial radio frequency cables.

REQUIREMENTS:

Dimensions and construction: See figure 1 and MIL-STD-348.

Force to engage/disengage:

Torque: 2 inch-pounds, maximum.

Longitudinal force: Not applicable.

Coupling proof torque: 15 inch-pounds, minimum.

Mating characteristics (see figure 1 and MIL-STD-348 for dimensions):

Inner contact (sockets):

Oversize test pin: 0.042 inch diameter, minimum (nonclosed entry contacts only).

Test pin finish: 16 microinches.

Insertion depth: .093 inch, minimum.

Number of insertions: One.

MIL-DTL-3655/14B

Insertion force test:

- Steel test pin diameter: .039 inch, minimum.
- Test pin finish: 16 microinches.
- Insertion depth: .093 inch, minimum.
- Insertion force: 2 pounds, maximum.

Withdrawal force test:

- Steel test pin diameter: .037 inch, maximum.
- Test pin finish: 16 microinches.
- Insertion depth: .093 inch, minimum.

Withdrawal force: 2 ounces, minimum.

Outer contact:

- Test ring I.D.: .319 inch, maximum.
- Test ring finish: 16 microinches.
- Insertion force: 5 pounds, maximum when inserted a minimum of .093 inch.
- Contact with slotted members: Shall contact a .324 inch minimum diameter ring within .031 of their tip ends.

Permeability: Applicable.

Hermetic seal: Not applicable.

Leakage: Not applicable.

Insulation resistance: 5×10^9 ohms, minimum.

Contact insulator captivation: Applicable; torque shall be 1 inch-pound.

Salt spray (corrosion): Applicable.

Connector durability: Applicable.

Contact resistance (milliohms, maximum):

	<u>Initial</u>	<u>After environment</u>
Inner conductor contacts:	3.0	4.2
Outer conductor contacts:	.4	Not applicable
Braid to body	.2	Not applicable

Dielectric withstanding voltage: 1,500 V rms, minimum, at sea level.

MIL-DTL-3655/14B

Vibration, high frequency: Applicable.

Shock (specified pulse): Applicable.

Temperature cycling: Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity.

Insulation resistance shall be at least 2×10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force: 25 pounds, minimum.

Coupling nut retention: Applicable.

PIN: M3655/14 (See table I for dash numbers).

Qualification: Not required.

CONCLUDING MATERIAL

Custodians:

Army - CR

Navy - EC

Air Force - 11

DLA - CC

Preparing activity:

DLA - CC

Review activities:

Army - AT, MI

Navy - AS, MC, OS, SH

Air Force - 17, 19, 99

(Project 5935-4181-02)