

INCH-POUND


MIL-DTL-39024/12E
3 February 2003
SUPERSEDING
MIL-C-39024/12D
14 August 1991

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE;
SINGLE TEST POINT (HOLE MOUNTING, PUSH-FIT), LOW VOLTAGE

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification and MIL-DTL-39024.

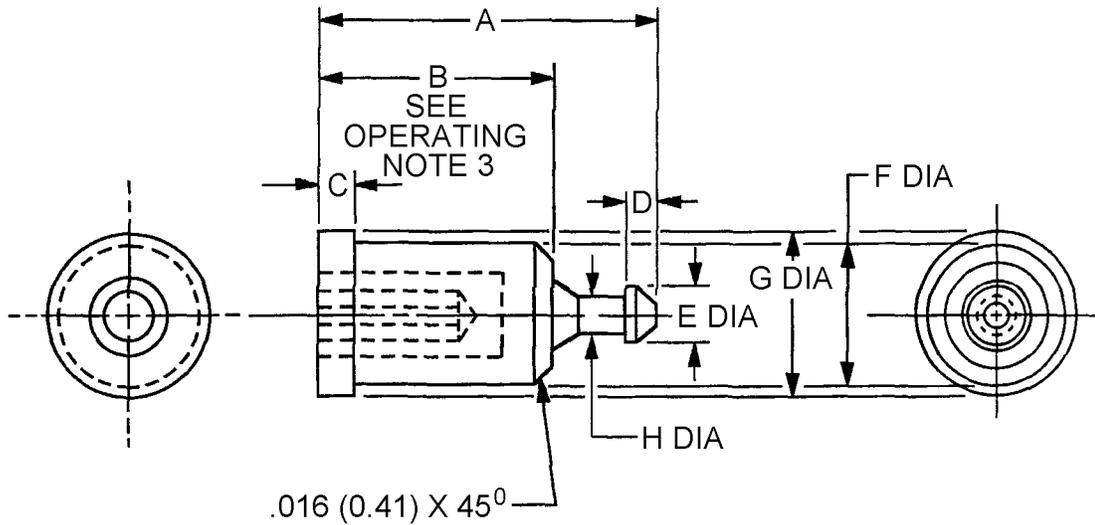

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are $\pm .010$ (0.25 mm) for three place decimals and $\pm 3.0^\circ$ for angles.

FIGURE 1. Configuration and dimensions.

MIL-DTL-39024/12E

TABLE I. Design and identification data.

Dash number	Dimensions ^{1/}								Insulation	
	A ±.010 (0.25)	B	C	D	E Dia	F Dia ± .002 (0.05)	G Dia	H Dia	Color	Number in accordance with FED-STD-595
-01	.453 (11.51)	.317 (8.05)	.047 (1.19)	.037 (0.94)	.074 (1.88)	.185 (4.70)	.219 (5.56)	.054 (1.37)	White	17875
-02	"	"	"	"	"	"	"	"	Red	11105
-03	"	"	"	"	"	"	"	"	Black	17038
-04	"	"	"	"	"	"	"	"	Brown	10075
-05	"	"	"	"	"	"	"	"	Green	14110
-06	"	"	"	"	"	"	"	"	Orange	12246
-07	"	"	"	"	"	"	"	"	Blue	15123
-08	"	"	"	"	"	"	"	"	Yellow	13655
-09	"	"	"	"	"	"	"	"	Gray	16187
-10	"	"	"	"	"	"	"	"	Purple	27144
-11	"	"	"	"	"	"	"	"	Natural	---
-12	.390 (9.91)	.265 (6.73)	.046 (1.17)	.023 (0.58)	.068 (1.73)	.149 (3.78)	.172 (4.37)	.040 (1.02)	White	17875
-13	"	"	"	"	"	"	"	"	Red	11105
-14	"	"	"	"	"	"	"	"	Black	17038
-15	"	"	"	"	"	"	"	"	Brown	10075
-16	"	"	"	"	"	"	"	"	Green	14110
-17	"	"	"	"	"	"	"	"	Orange	12246
-18	"	"	"	"	"	"	"	"	Blue	15123
-19	"	"	"	"	"	"	"	"	Yellow	13655
-20	"	"	"	"	"	"	"	"	Gray	16187
-21	"	"	"	"	"	"	"	"	Purple	27144
-22	"	"	"	"	"	"	"	"	Natural	---

^{1/} Metric equivalents are in parentheses.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Insulation: Material shall be polytetrafluoroethylene in accordance with ASTM D1710.

Operating temperature: -65°C to +200°C.

Test probe: Connectors shall be .500 inch (minimum) length and accept test probe tips as follows:

<u>Dash numbers</u>	<u>Probe dia. (±.001)</u>
-01 thru -11	.080 inch
-12 thru -22	.040 inch

MIL-DTL-39024/12E

Contact current rating: 5.5 amperes (maximum).

Dielectric withstanding voltage (at sea level):

Test voltage shall be as follows:

<u>Dash numbers</u>	<u>Volts, rms (60 Hz)</u>
-01 thru -11	1,800
-12 thru -22	1,600

Insertion and withdrawal forces:

Insertion force: 5.0 pounds (max).

Withdrawal force: 0.4 pound (min).

Thermal shock: Shall be in accordance with method 107 of MIL-STD-202, condition C.

Identification marking:

Part or Identifying Number (PIN): M39024/12-(dash number from table I).

Operating conditions:

Operating voltage is as follows:

<u>Dash numbers</u>	<u>At sea level</u>	<u>At 50,000 feet</u>
-01 thru -11	800 volts rms, 60 Hz	450 volts rms, 60 Hz
-12 thru -22	700 volts rms, 60 Hz	450 volts rms, 60 Hz

Maximum thickness of panel on which these connectors may be used is as follows:

<u>Dash numbers</u>	<u>Max panel thickness</u>
-01 thru -11	.230 inch
-12 thru -22	.139 inch

Application data:

Dash numbers -01 thru -11. Countersink installation side $.172 \pm .002$ inch mounting hole with a 60° countersink to $.195 + .005, -.000$ inch diameter when used with a .040 inch or thicker chassis.

Dash numbers -12 thru -22. Countersink installation side $.136 \pm .002$ inch mounting hole with a 60° countersink to $.160 + .005, -.000$ inch diameter when used with a .040 inch or thicker chassis.

An 82° countersink shall be used with a chassis under 0.040 inch thick.

MIL-DTL-39024/12E

Qualification: Not applicable.

Quality conformance inspection. Group A and B tests of MIL-DTL-39024 shall be applicable.

Note: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-4438-004)

Review activities:

Army - AR, CR4, MI
Navy - AS, CG, MC, OS
Air Force - 19