


DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES),
 STYLE 3 (ONE - HOLE MOUNTING, THROUGH)

This specification forms a part of MIL-DTL-5423, dated 5 April 2002, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-5423.

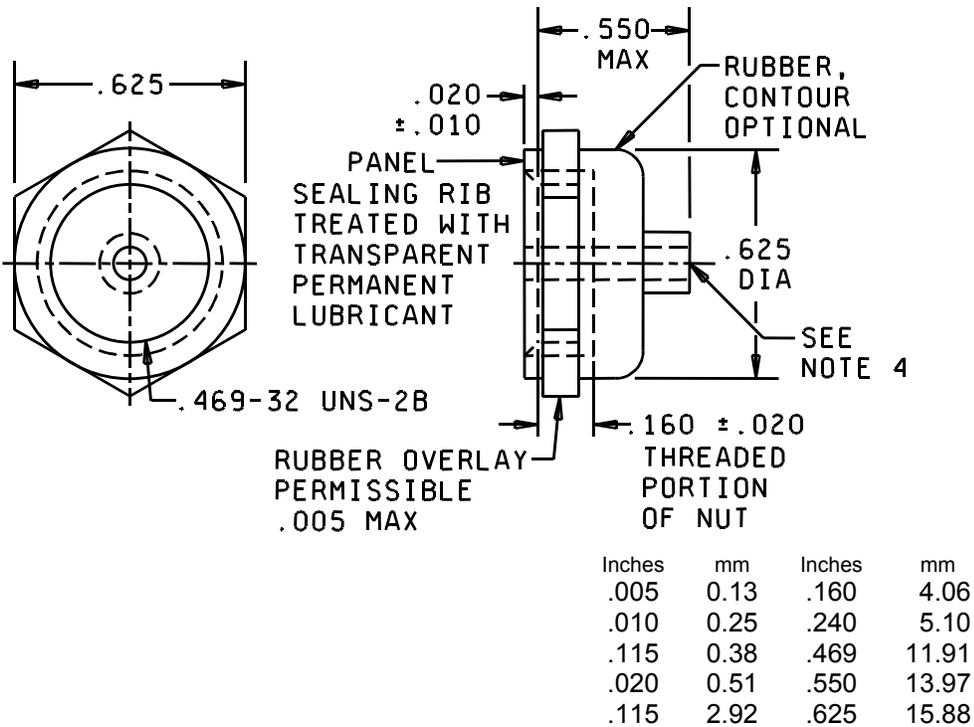

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are $\pm .015$ (0.38 mm).
4. Opening shall pass over a .240 pin without rupturing or tearing and fit snugly over a .115 diameter pin. Inner portion of opening shall be treated with transparent lubricant.

FIGURE 1. Dimensions and configuration boot type A, style 3.

MIL-DTL-5423/2D

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50.

Restoring force: 5 inch – ounces.

Operation of guards: Applicable.

Part or Identifying Number (PIN): M5423/02-01.

Custodians:

Army - CR

Navy - AS

Air Force - 11

DLA - CC

Preparing activity:

DLA - CC

(Project 5930-1735-02)

Review activities:

Army – AT, AV, CR4, MI

Navy – CG, EC, MC, OS

Air Force - 99