

MIL-B-5423/12B
 1 JUNE 1982
 SUPERSEDING
 MIL-B-5423/12A
 16 August 1966


MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES),
 STYLE 9 (FIVE-HOLE MOUNTING, THROUGH)

(B) INACTIVE FOR NEW DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-B-5423/1 OR MIL-B-5423/2.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the boot described herein shall consist of this specification and the latest issue of Specification MIL-B-5423.

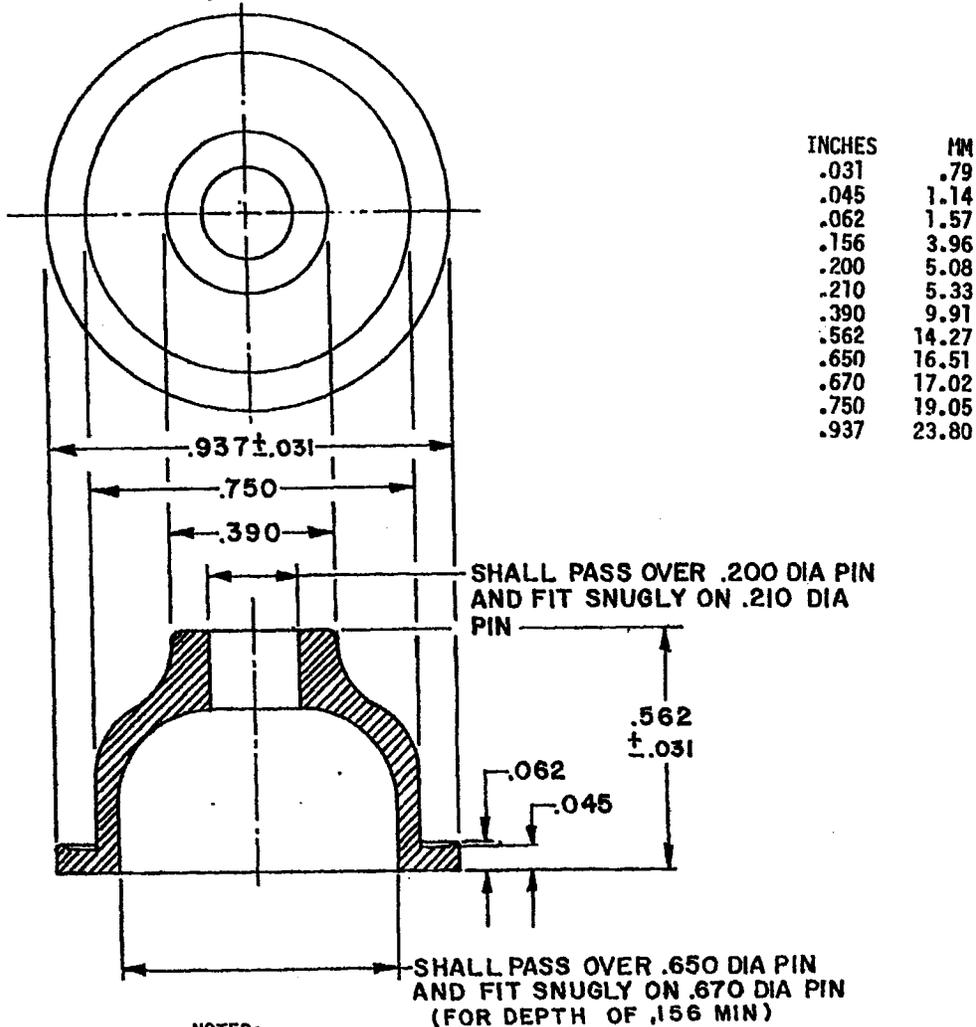

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm).

FIGURE 1. Boot type A, style 9.

(B) denotes changes.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicone rubber: Grade 50.

Watertightness: 5 pounds-force per square inch gage.

Intended use: MS25106.

Part number: M5423/12-A9.

Custodians:

Army - ER

Navy - AS

Air Force - 85

Preparing activity:

Army - ER

(Project 5930-1174-9)

Review activities:

Navy - SH

Air Force - 11, 99

DLA - ES

User activities:

Army - AR

Navy - MC

Agent:

DLA - ES