


MIL-DTL-55302/175B

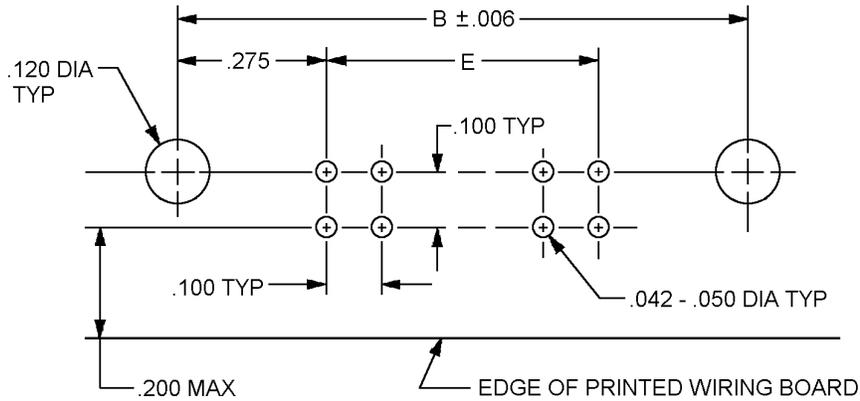

Recommended circuit layout


F ±.015 (0.38 mm)		Type	Type of termination
Inches	mm		
.180	4.57	I	Solder post (see note 9)
.120	3.05	IV	

Inches	mm	Inches	mm
.001	0.03	.100	2.54
.002	0.05	.120	3.05
.005	0.13	.182	4.62
.006	0.15	.197	5.00
.008	0.20	.200	5.08
.010	0.25	.210	5.33
.015	0.38	.218	5.54
.020	0.51	.275	6.98
.025	0.64	.300	7.62
.042	1.07	.344	8.74
.050	1.27	.38	9.7
.054	1.37	.407	10.34
.085	2.16	.462	11.73
.086	2.18	.662	16.81
.088	2.24	.807	20.50

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 inch (0.13 mm) on decimals and ± 2° on angles.
4. These connectors mate with connectors specified in MIL-DTL-55302/174.
5. Location indicators embossed on surface.
6. Numbers and indicating end cavities, letters indicating row nearest to polarizing feature, and markings every ten positions stamped on this surface.
7. Mounting ears and hardware are purchased separately. See MIL-DTL-55302/182 for mounting hardware.
8. Chamfers shall be .015 inch (0.38 mm) minimum at a 45° angle ± 5°.
9. Solder post shall be a .036-inch (0.91 mm) maximum diameter or .036 inch (0.91 mm) maximum across the diagonal.
10. Mounting recommendations: See figure 2.

FIGURE 1. Connectors, pin assemblies .100 inch (2.54 mm) spacing, 20 through 150 contacts – Continued.

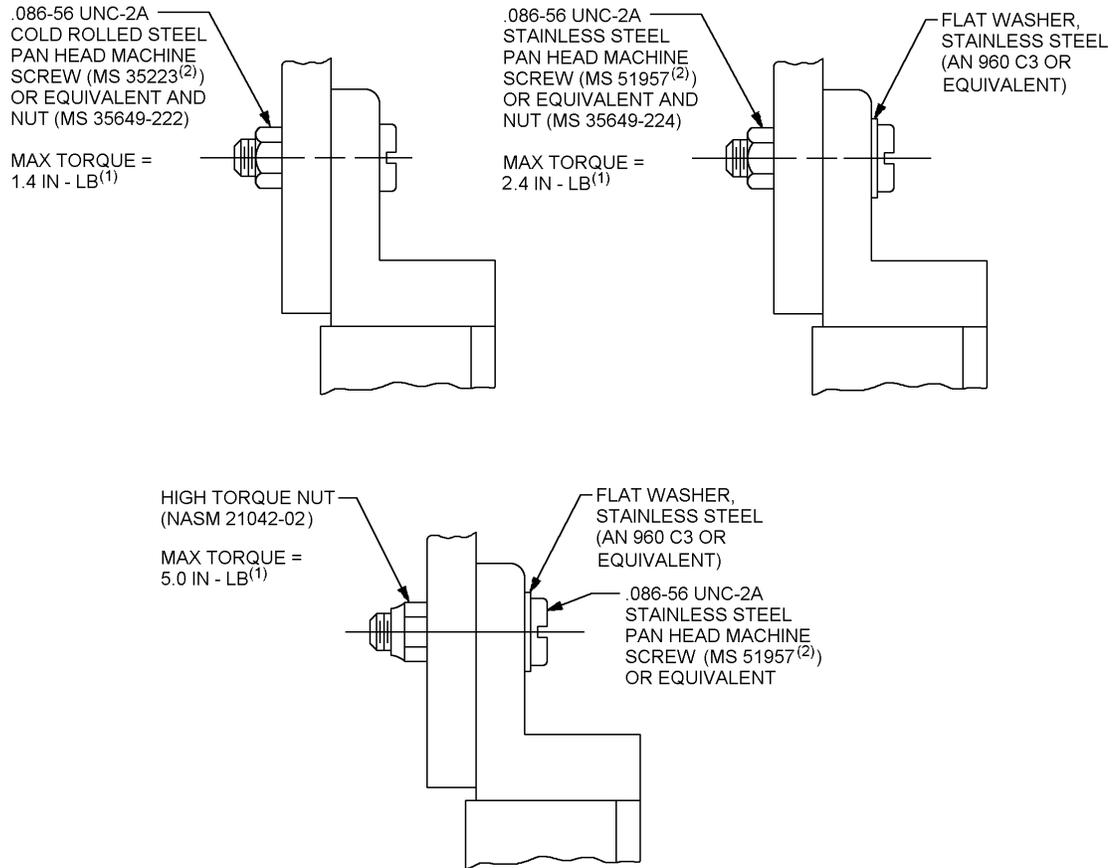

NOTES:

1. Torque wrench must be used when fastening connector to printed circuit board.
2. Length to be determined by user.

FIGURE 2. Mounting recommendations.

TABLE I. Dash number, number of contacts, contact type and dimensions. 1/

Dash number	No. of contacts	Contact type	A	B	C	D	E	Contact ident. no.
01 04	20	I IV	1.750 (44.45)	1.450 (36.83)	1.050 (26.67)	9	.900 (22.86)	1-10
05 08	30	I IV	2.250 (57.15)	1.950 (49.53)	1.550 (39.37)	14	1.400 (35.56)	1-15
09 12	40	I IV	2.750 (69.85)	2.450 (62.23)	2.050 (52.07)	19	1.900 (48.26)	1-20
13 16	50	I IV	3.250 (82.55)	2.950 (74.93)	2.550 (64.77)	24	2.400 (60.96)	1-25
17 20	56	I IV	3.550 (90.17)	3.250 (82.55)	2.850 (72.39)	27	2.700 (68.58)	1-28
21 24	60	I IV	3.750 (95.25)	3.450 (87.63)	3.050 (77.47)	29	2.900 (73.66)	1-30
29 32	80	I IV	4.750 (120.65)	4.450 (113.03)	4.050 (102.87)	39	3.900 (99.06)	1-40
37 40	100	I IV	5.750 (146.05)	5.450 (138.43)	5.050 (128.27)	49	4.900 (124.46)	1-50
57 60	134	I IV	7.450 (189.23)	7.150 (181.61)	6.750 (171.45)	66	6.600 (167.64)	1-67
65 68	150	I IV	8.250 (209.55)	7.950 (201.93)	7.550 (191.77)	74	7.400 (187.96)	1-75

1/ Deleted dash numbers in the series 01 through 68 are canceled with no replacement.

TABLE II. Contact plating requirements. 1/

Type	Finish requirement
A	Overall contact finish: Shall be gold in accordance with MIL-DTL-55302.
B	Localized contact finish: Contact engagement area shall have a minimum plating in accordance with MIL-DTL-55302. Solder post area (contact type I, .195 minimum length; type IV, .135 minimum length) shall be tin-lead over nickel in accordance with MIL-DTL-55302.

1/ Type C finish is deleted and superseded by type A or B.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1 and table I.

Material: In accordance with MIL-DTL-55302.

Plating: See table II.

Current rating: 3.0 amperes maximum per contact, 2.25 amperes continuous per contact at room ambient with no more than two adjacent contacts carrying this current.

Keying (see MIL-DTL-55302/31):

Two keys, Part or Identifying Number (PIN) M55302/31-04, and two .086-56 UNC-2A mounting screws are recommended. Keys and screws shall be ordered separately.

Jackscrews (see MIL-DTL-55302/182):

Use M55302/182-11, -12, -13, -14, -15, or -16. Jackscrews are purchased separately.

Mating and unmating: The mating force in pounds shall be the number of contacts multiplied by 250; the withdrawal force in pounds shall be a minimum of .025 times the number of contacts and shall not exceed the measured insertion force.

Contact resistance: No individual contact pair shall have a resistance exceeding .015-ohm initial and .020 after testing.

Contact retention: 3 pounds, minimum.

Dielectric withstanding voltage:

Sea level: 900 volts rms.

70,000 feet: 200 volts rms.

2 milliamperes maximum leakage current.

PIN: M55302/175 (and dash number from table I and type from table II).

Group qualification: See table III.

TABLE III. Group qualification.

Qualification of any of the following connectors <u>1/</u> , <u>2/</u>	Qualifies the following connectors	Retains qualification on the following
M55302/173-*** M55302/175-***	M55302/173-*** M55302/175-***	M55302/173-*** M55302/175-*** M55302/176-*** M55302/178-*** M55302/179-*** M55302/181-***
M55302/176-*** M55302/178-***	M55302/173-*** M55302/175-*** M55302/176-*** M55302/178-***	
M55302/179-*** M55302/181-***	M55302/173-*** M55302/175-*** M55302/176-*** M55302/178-*** M55302/179-*** M55302/181-***	

1/ For initial qualification, connectors with the largest number of contact positions from the left hand column shall be used to obtain qualification for parts in corresponding center column.

2/ For qualification retention data may be supplied on any two parts from the left hand column in order to retain qualification for the parts listed in the right hand column.

CONCLUDING MATERIAL

Custodians:
 Army - CR
 Navy - EC
 Air Force - 11
 DLA - CC

Preparing activity:
 DLA - CC
 (Project 5935-4461)

Review activities:
 Army - AR, AT, AV, CR4
 Navy - AS, MC
 Air Force - 19, 99