


User activities: Army -MC,AS,SH  
Navy -EC,AS,SH  
Air Force -11

Reviewer activities: Army -11,13  
Navy -11,13  
Air Force -11,13

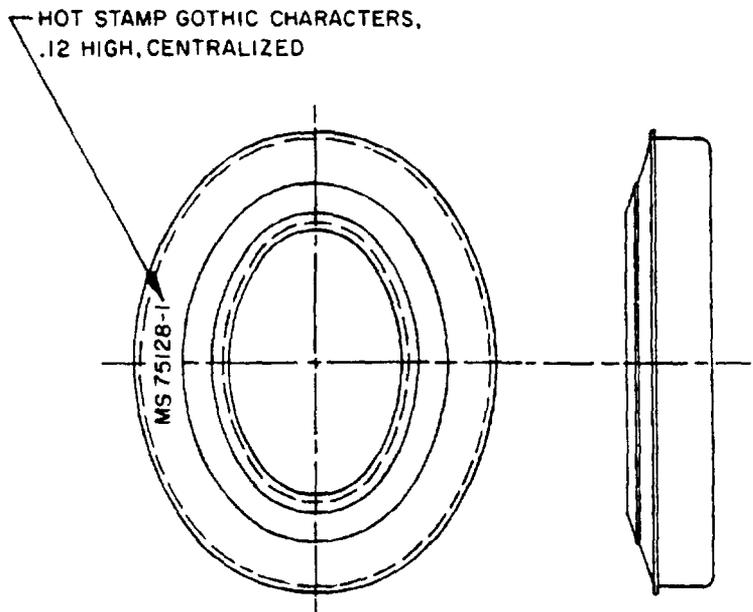

Mat'l Film, flexible vinyl, MIL-F-10400, class 2, black, .020± .002 thick. except as noted.

- (a) Temperature range per MIL-E-55119, operating ambient temperature in the range of +150° F to -40° F (The 150° temperature includes the effect of sunload). Exposure at the high temperature extreme not to exceed 4 hours, and at the low temperature extreme not to exceed 72 hours at any one time. Non-operating exposure in the range of +160° F to -80° F. Exposure at the high temperature not to exceed 4 hours and at the low temperature extreme not to exceed 24 hours.
- (b) One side dull matte.



(A) ENTIRE STANDARD REVISED

APPROVED 27 Jul 71 REVISED (A) 13 MARCH 1979

|  |                        |                   |                   |
|--|------------------------|-------------------|-------------------|
| P A Army-CR<br>Other Cust AF-85<br>Navy - EC | International interest | TITLE             | MILITARY STANDARD |
|  |                        | CUSHION, EARPHONE | MS 75128          |
| Procurement Specification<br>MIL-H-55353     |                        | SUPERSEDES        | PAGE 1 OF 2       |

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS  
5965

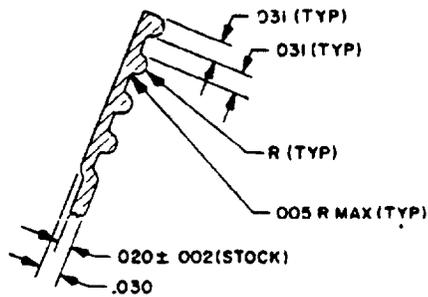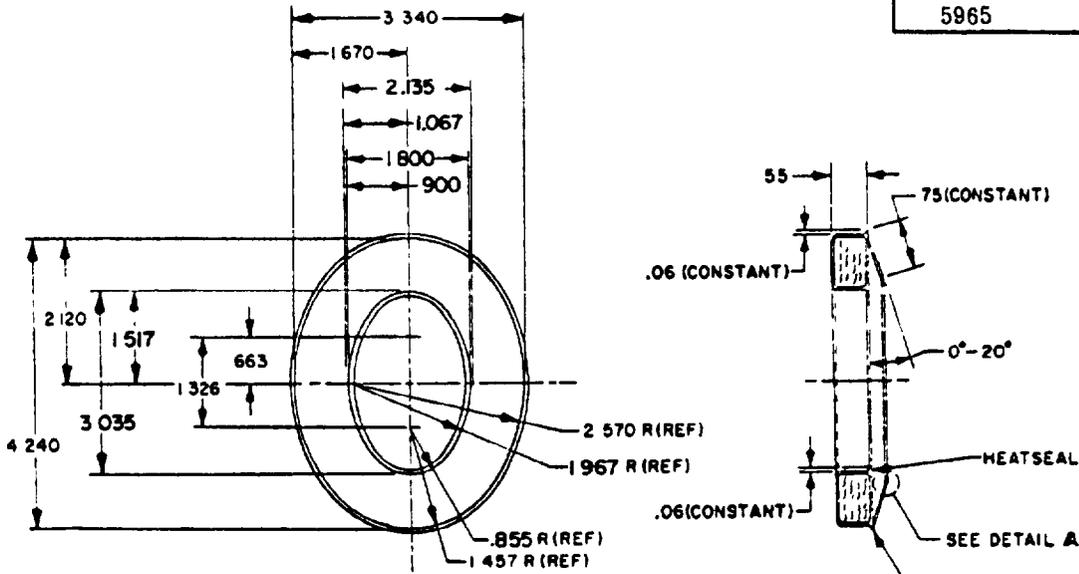

DETAIL-A  
TYP ALL AROUND

| INCHES | MM  | INCHES | MM    | INCHES | MM    | INCHES | MM    | INCHES | MM    | INCHES | MM     |
|--------|-----|--------|-------|--------|-------|--------|-------|--------|-------|--------|--------|
| .002   | .05 | .031   | .79   | .75    | 19.05 | 1.067  | 27.10 | 1.800  | 45.72 | 2.570  | 65.28  |
| .005   | .13 | .06    | 1.52  | .855   | 21.72 | 1.326  | 33.68 | 1.967  | 49.96 | 3.035  | 77.09  |
| .020   | .51 | .55    | 13.97 | .900   | 22.86 | 1.457  | 37.01 | 2.120  | 53.85 | 3.340  | 84.84  |
| .030   | .76 | .663   | 16.84 |        |       | 1.517  | 38.53 | 2.135  | 54.23 | 4.240  | 107.70 |
|        |     |        |       |        |       | 1.670  | 42.42 |        |       |        |        |

NOTES

1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
3. Unless otherwise specified, tolerances are ± .010 ( .25 mm) for three place decimals and + .03 ( .76 mm) for two place decimals
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein
5. Reference document shall be of the issue in effect on date of invitation for bid

REVISED ENTIRE STANDARD REVISED  
APPROVED

|                                       |                        |                   |                   |
|---------------------------------------|------------------------|-------------------|-------------------|
| P A Army - CR                         | International interest | TITLE             | MILITARY STANDARD |
| Other Cust AF-85                      |                        | CUSHION, EARPHONE | MS 75128          |
| Navy - EC                             |                        |                   |                   |
| Procurement Specification MIL-H-55353 |                        | SUPERSEDES        | PAGE 2 OF 2       |

User activities: Army  
Navy  
Air Force

Reviewer activities: Army  
Navy  
Air Force

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.