


User activities: Army -
Navy -
Air Force -


Review activities: Army -
Navy -
Air Force -99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

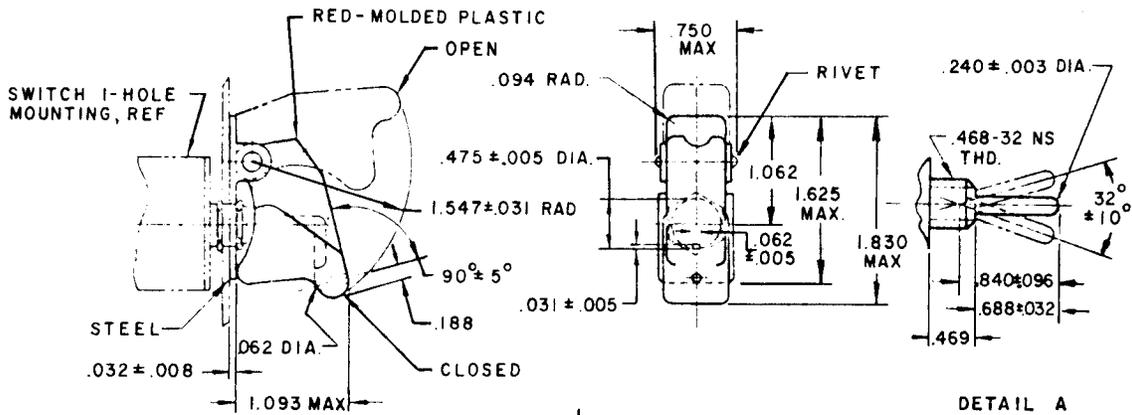

DETAIL A

SUITABLE FOR USE WITH SWITCHES HAVING TOGGLE CHARACTERISTICS IN ACCORDANCE WITH DETAIL B (3-HOLE MOUNTING)

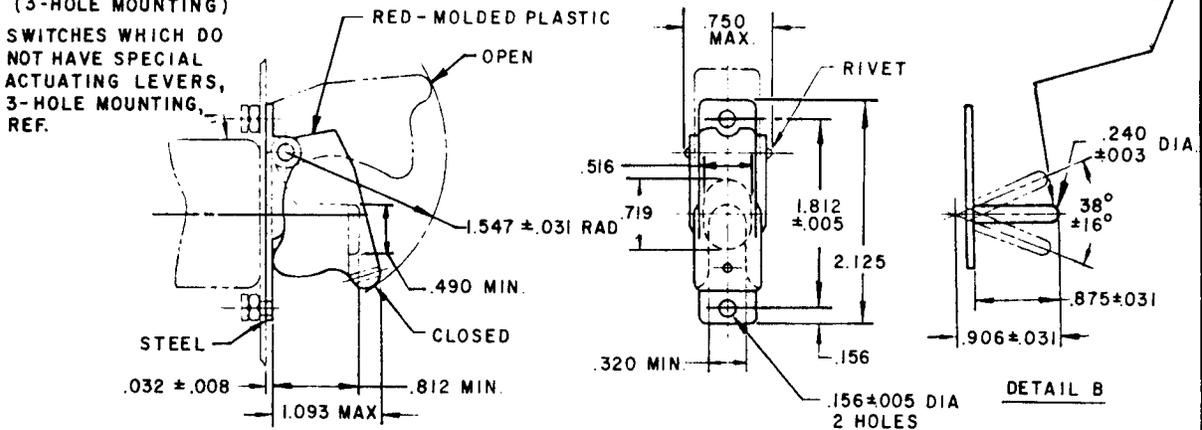

DETAIL B

DASH NO.	TYPE	PANEL THICKNESS (REF)	OPERATING FORCE	REMARKS
-1	1-HOLE MOUNTING	.050 TO .248	1.0 TO 2.5 LB	
-2 1/	3-HOLE MOUNTING	.050 TO .081		IDENTICAL TO -1, EXCEPT KEYWAY IS ROTATED 180°
-3	1-HOLE MOUNTING	.050 TO .248		

1/ INACTIVE FOR NEW DESIGN. USE FOR REPLACEMENT ONLY.

Ⓢ denotes changes

REVISED Ⓢ 20 DEC 82

APPROVED 13 MAR 57

P.A AF-85	International interest	TITLE	MILITARY STANDARD
Other Cust ARMY-ER NAVY-AS		GUARD, SWITCH, 3 POSITION	MS 25225
Procurement Specification MIL-G-7703		SUPERSEDES: AN 3228	PAGE 1 OF 2

User activities:
Army -
Navy -
Air Force -

Review activities:
Army -
Navy -
Air Force - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

	INCHES	MM	INCHES	MM	INCHES	MM
ⓐ	.003	.08	.156	3.96	.750	19.05
	.005	.13	.188	4.77	.812	20.62
	.008	.20	.240	6.10	.840	21.34
	.016	.41	.248	6.30	.875	22.22
	.031	.79	.320	8.13	.906	23.01
	.032	.81	.469	11.91	1.062	26.97
	.050	1.27	.475	12.06	1.093	27.76
	.062	1.57	.490	12.45	1.547	39.29
	.081	2.06	.516	13.11	1.625	41.28
	.094	2.39	.688	17.47	1.812	46.02
	.096	2.44	.719	18.26	1.830	46.48
					2.125	53.98

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± 0.016 on decimals.
3. Material: Plastic, molded, red, color STD 11136, Federal Standard 595. Steel, commercial, shall be smooth and free from burrs.
- ⓐ 4. Finish: Zinc plate, QQ-Z-325, type III, or cadmium plate, QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or DOD-P-15328, black enamel, lusterless, color number 37038 or semigloss, color number 27038, Federal Standard 595 or equivalent.
5. Guard shall remain in either open or closed position.
6. Opening the guard shall not change position of switch contacts.
7. When lever is in upward position, closing guard shall throw lever to center position.
8. When lever is in downward position, closing guard shall not throw lever to center position.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Referenced documents shall be of the issue in effect on date of invitations for bid.

REVISED ⓐ FOR CHGS SEE PG 2

APPROVED

P.A AF-85	International interest	TITLE	MILITARY STANDARD
Other Cust ARMY-ER NAVY-AS		GUARD, SWITCH, 3 POSITION	MS 25225
Procurement Specification MIL-G-7703		SUPERSEDES: AN3228	PAGE 2 OF 2