


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any way licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

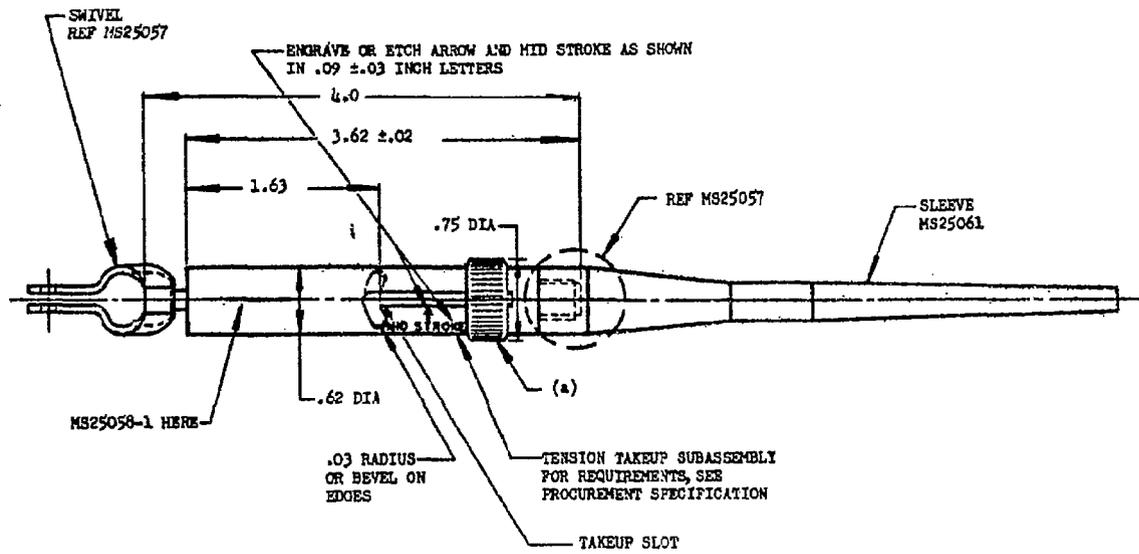

MS PART NO.	FIIN
MS25058-1	

(a) DETENT MUST BE PROVIDED TO HOLD LOCKING RING IN FORWARD POSITION AGAINST MINIMUM 3 POUNDS, MAXIMUM 10 POUNDS DISENGAGING FORCE.

MATERIAL: SOCKET AND TENSION TAKEUP BODY, CORROSION-RESISTANT STEEL, SPECIFICATION MIL-S-5059.
 BALL, TO CONFORM IN GENERAL WITH SPECIFICATION MIL-B-5687.
 SWIVEL, .06 STAINLESS STEEL, SPECIFICATION MIL-S-5059.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ONE-PLACE DECIMALS ±.1, TWO-PLACE DECIMALS ±.01, THREE-PLACE DECIMALS ±.005.

THREADS TO CONFORM TO SPECIFICATION MIL-S-7742.

MAXIMUM WEIGHT .26 POUND.

APPROVED 10 Aug 55 REVISED

CUSTODIANS Navy - BuAer Air Force	OTHER INT. A - N - AF -	MILITARY STANDARD	MS25058 (ASG)
		TAKEUP, TENSION, ANTENNA	
PROCUREMENT SPECIFICATION MIL-A-7965		SUPERSEDES: BUAEZ DRAWING E-1795	SHEET 1 OF 1