

INCH-POUND

MS27616A
29 September 2000
SUPERSEDING
MS27616
17 March 1971

DETAIL SPECIFICATION SHEET

ADAPTER ASSEMBLY, FLARED, STRAIGHT, TUBE TO
HOSE-WITH SWIVEL NUT

This specification is approved for use by all Departments and
Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet
and MIL-DTL-83296.

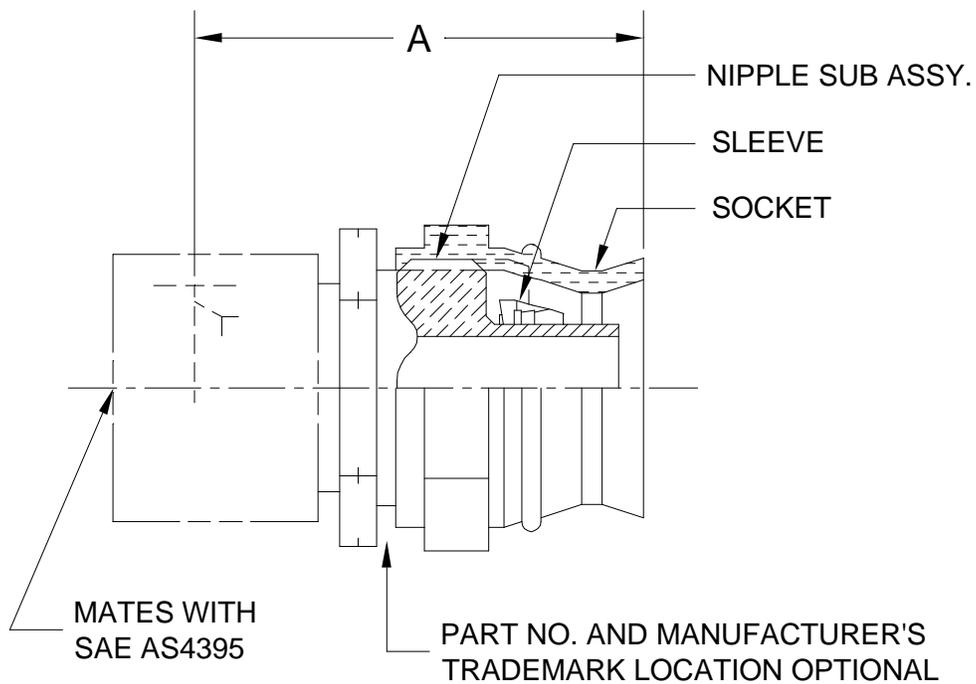


FIGURE 1. Straight, flared, adapter assembly.

MS27616A

TABLE I. Adapter assembly parts and dimensions.

Part number	Nipple sub assembly	Sleeve	Socket	A max
MS27616-4C	MS27619-4C	MS27623-4C	MS27622-4C	1.58
MS27616-6C	MS27619-6C	MS27623-6C	MS27622-6C	1.69
MS27616-8C	MS27619-8C	MS27623-8C	MS27622-8C	1.99
MS27616-10C	MS27619-10C	MS27623-10C	MS27622-10C	2.13


REQUIREMENTS:

1. Adapters shall be in accordance with figure 1 and table I.
2. Material shall be a corrosion resistant type steel.
3. Finish shall be in accordance with MIL-DTL-83296.
4. The part number and manufacturer's part number shall be marked in accordance with MIL-DTL-83296.

NOTES:

1. These parts are for use with MIL-DTL-83298 hose.
2. This specification sheet takes precedence over documents referenced herein.
3. Referenced documents shall be of the issue listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.
4. Dimensioning and tolerancing are in accordance with ASME Y14.5M-1994.
5. Part or Identifying Number (PIN):

Example of a PIN: MS27616-4C.

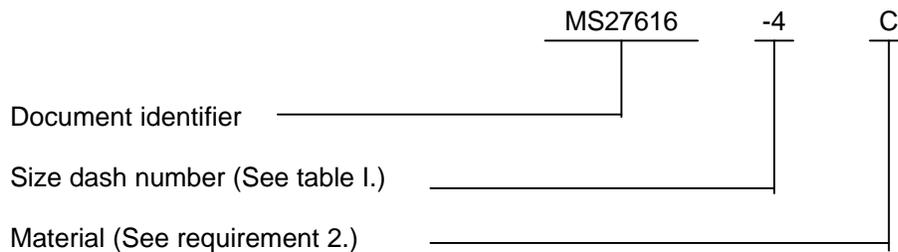

MS27616A

Custodians:

Air Force - 99
Army - AV
Navy - AS
DLA - CC

Preparing activity:

DLA - CC

(Project 4730-1040-002)

Review activities:

Air Force - 82
Navy - MC, SA