



DEFENSE LOGISTICS AGENCY
DEFENSE SUPPLY CENTER, COLUMBUS
POST OFFICE BOX 3990
COLUMBUS, OH 43218-3990

IN REPLY
REFER TO

DSCC-VAI

September 24, 2004

MEMORANDUM FOR MILITARY/INDUSTRY DISTRIBUTION

SUBJECT: Initial Draft of MIL-DTL-83503/21 amendment 1, Connectors, Electrical, Flat Cable, Nonenvironmental, Straight Thru (.100 inch spacing) with Polarizing Feature, Solderless Wrappost or PWB Termination, Project number 5935-4771-000.

The initial draft for this subject document, dated 30 September 2003, is now available for viewing and downloading from the DSCC-VA Web site:

<http://www.dsccl.dla.mil/programs/milspec/>

Major changes to this document are on page 4, table I. Dimension D has been changed on the following dash numbers:

Dash 16-18 was 2.06, changed to 1.890 (48.01)
Dash 19-21 was 2.36, changed to 2.190 (55.63)
Dash 22-24 was 2.86, changed to 2.690 (68.33)
Dash 25-27 was 3.36, changed to 3.190 (81.03)

Concurrence or comments are required at this Center within 45 days from the date of this letter. Late comments will be held for the next coordination of the document. Comments from military departments must be identified as either "Essential" or "Suggested". Essential comments must be justified with supporting data. Military review activities should forward comments to their custodians of this office, as applicable, in sufficient time to allow for consolidating the department reply.

The point of contact for this document is Mr. William Carpenter, Defense Supply Center Columbus, DSCC-VAI, Post Office Box 3990, Columbus, OH 43218-3990. Mr. Carpenter can also be reached at COMM 614-692-0573, DSN 850-0573, or by facsimile 614-692-6939/850-6939, or by e-mail to: William.F.Carpenter@dla.mil.

/SIGNED/

Richard L. Taylor
Chief
Interconnection Devices Team

cc:
VSS William Heckman
VSC Michael Jones
VQP Richard Marbias
CDAB Dave Barman

NOTE: This draft, dated 30 September 2003 prepared by DLA-CC, has not been approved and is subject to modification. DO NOT USE PRIOR TO APPROVAL. (PROJECT 5935-4771-000)

INCH-POUND

MIL-DTL-83503/21D
w/AMENDMENT 1
DRAFT
SUPERSEDING
MIL-DTL-83503/21D
21 July 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, FLAT CABLE, NONENVIRONMENTAL,
HEADER, STRAIGHT THRU (.100 INCH SPACING) WITH POLARIZING FEATURE,
SOLDERLESS WRAPPOST OR PWB TERMINATION

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83503.

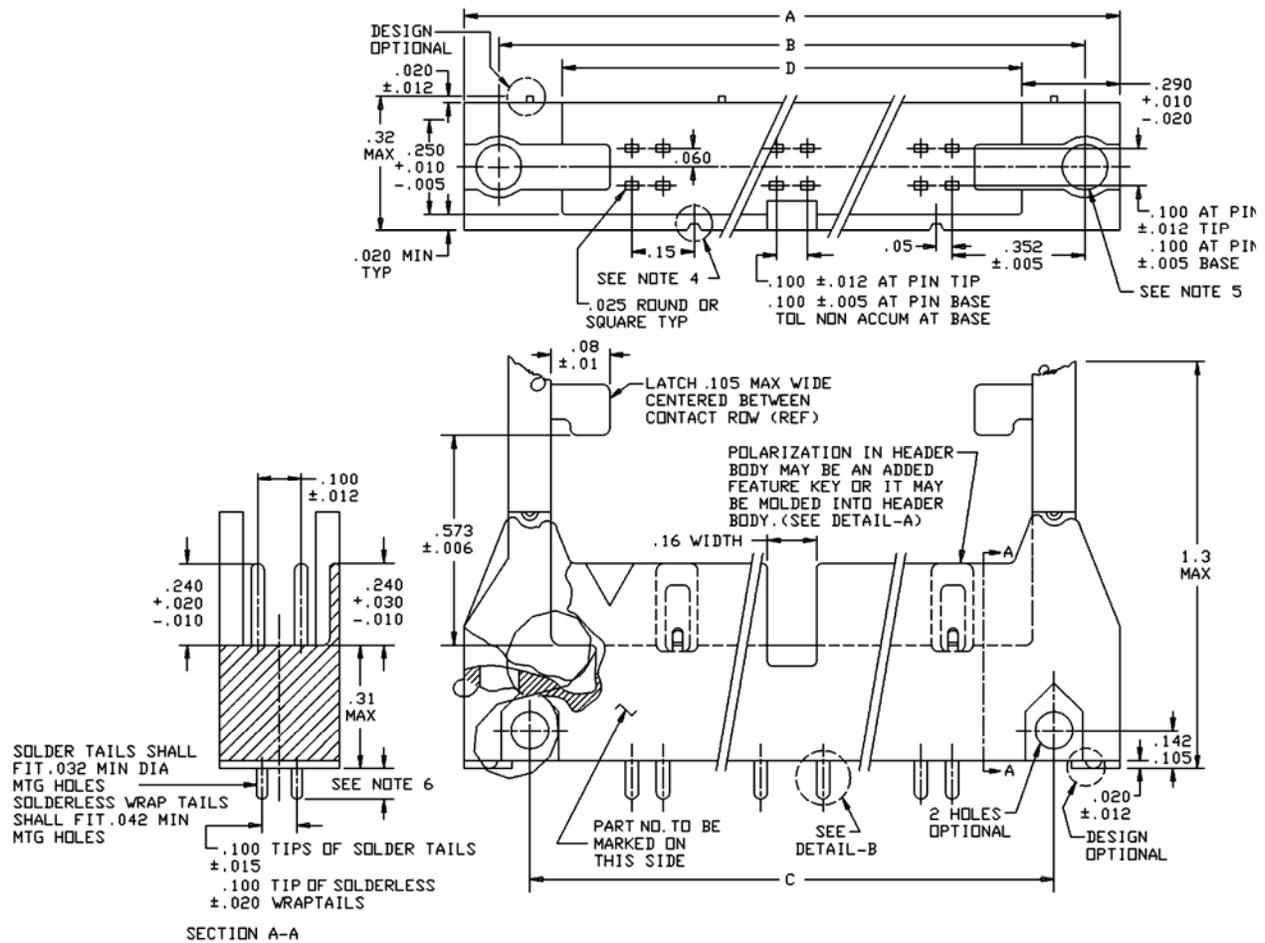


FIGURE 1. Dimensions and configuration.

MIL-DTL-83503/21D
w/AMENDMENT 1

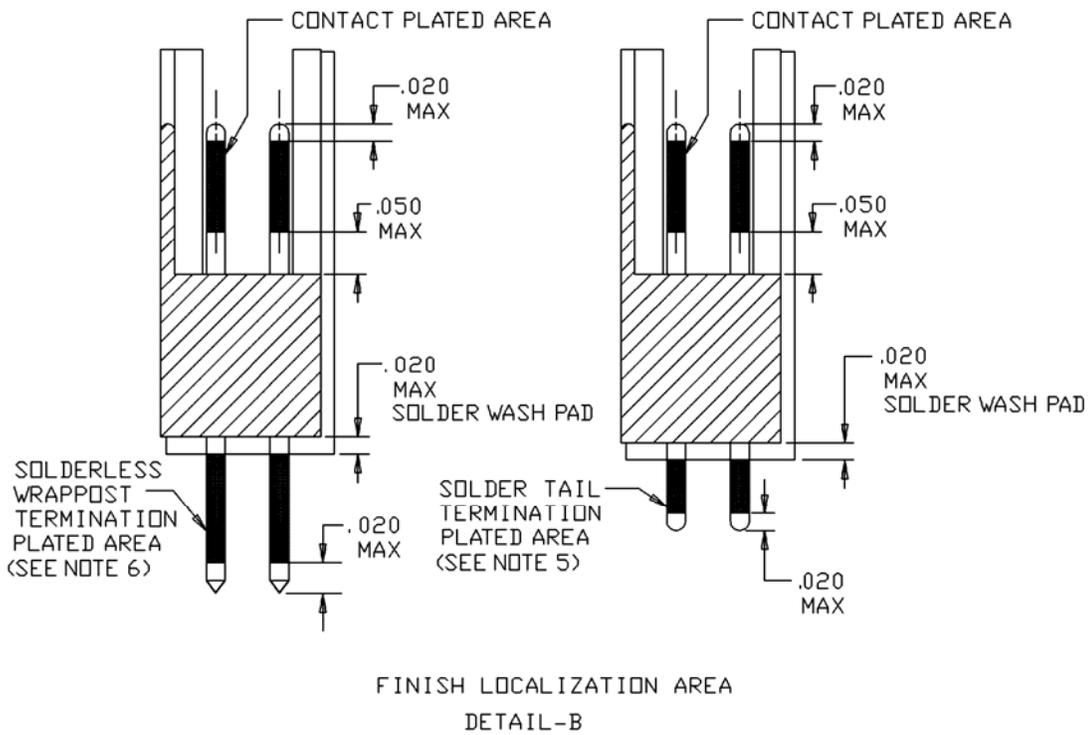
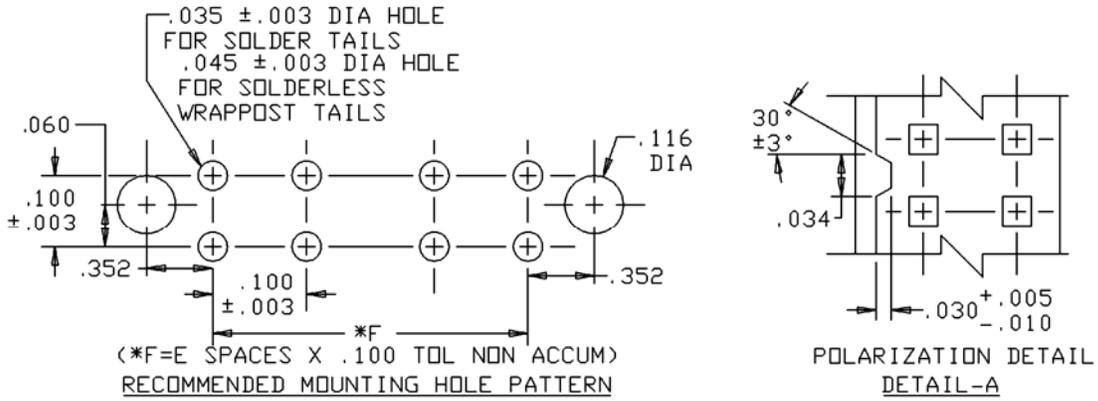


FIGURE 1. Dimensions and configuration - Continued.

MIL-DTL-83503/21D
w/AMENDMENT 1

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.025	0.64	.05	1.3	.240	6.10
.005	0.13	.030	0.76	.060	1.52	.250	6.35
.006	0.15	.032	0.81	.08	2.0	.290	7.37
.010	0.25	.034	0.86	.100	2.54	.31	7.9
.01	0.3	.035	0.89	.105	2.67	.32	8.13
.012	0.30	.042	1.07	.116	2.95	.352	8.94
.015	0.38	.045	1.14	.125	3.18	.573	14.55
.020	0.51	.050	1.27	.142	3.60	.610	15.49
				.16	4.1	1.3	33.0

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are $\pm .005$ inch (0.13 mm) for three place decimals and $\pm .01$ inch (0.3 mm) for two place decimals.
4. For 10 and 14 position connectors the polarizing feature on this end is non-existent.
5. Two thread cutting screws, No. 4-24 (1/4 inch long) type BG are provided.
6. Pin length for printed wiring board (PWB) thickness of is as follows:

PWB thickness inch (mm)	Pin length Min inch (mm)	Pin length Max inch (mm)
.062 (1.57)	.089 (2.26)	.116 (2.95)
.125 (3.18)	.152 (3.86)	.178 (4.52)

7. Solderless wrappost, pin length shall be $.610 \pm 0.015$ inch (15.49 \pm 0.38 mm).

FIGURE 1. Dimensions and configuration - Continued.

MIL-DTL-83503/21D
w/AMENDMENT 1

TABLE I. Dash numbers and characteristics.

Dash Number	Number of pins	Dimensions						Termination, right angle contact type
		A inch (mm)	B inch (mm)	C inch (mm)	D ^{1/} inch (mm)	E spaces	F inch (mm)	
-01	10							
-02	10	1.26	1.10	.86	.690	4	.400	.062 PWB
-03	10	(32.0)	(27.9)	(21.84)	(17.53)		(10.16)	.125 PWB Wrappost
-04	14							
-05	14	1.46	1.30	1.06	.890	6	.600	.062 PWB
-06	14	(37.1)	(33.0)	(26.92)	(21.34)		(15.24)	.125 PWB Wrappost
-07	16							
-08	16	1.56	1.40	1.16	.990	7	.700	.062 PWB
-09	16	(39.6)	(35.6)	(29.46)	(25.15)		(17.78)	.125 PWB Wrappost
-10	20							
-11	20	1.76	1.60	1.36	1.190	9	.900	.062 PWB
-12	20	(44.7)	(40.6)	(34.54)	(30.23)		(22.86)	.125 PWB Wrappost
-13	26							
-14	26	2.06	1.90	1.66	1.490	12	1.200	.062 PWB
-15	26	(52.3)	(48.3)	(42.16)	(37.85)		(30.48)	.125 PWB Wrappost
-16	34							
-17	34	2.46	2.30	2.06	1.890	16	1.600	.062 PWB
-18	34	(62.5)	(58.4)	(52.32)	(48.01)		(40.64)	.125 PWB Wrappost
-19	40							
-20	40	2.76	2.60	2.36	2.190	19	1.900	.062 PWB
-21	40	(70.1)	(66.0)	(59.94)	(55.63)		(48.26)	.125 PWB Wrappost
-22	50							
-23	50	3.26	3.10	2.86	2.690	24	2.400	.062 PWB
-24	50	(82.8)	(78.7)	(72.64)	(68.33)		(60.96)	.125 PWB Wrappost
-25	60							
-26	60	3.76	3.60	3.36	3.190	29	2.900	.062 PWB
-27	60	(95.5)	(91.4)	(85.34)	(81.03)		(73.66)	.125 PWB Wrappost
-28	64							
-29	64	3.96	3.80	3.56	3.390	31	3.100	.062 PWB
-30	64	(100.6)	(96.5)	(90.42)	(86.11)		(78.74)	.125 PWB Wrappost

^{1/} Tolerance for "D" dimension is +.030 -.000 inch (+0.76 -0.00 mm).

MIL-DTL-83503/21D
w/AMENDMENT 1

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1 and table I.

Temperature range: -55° to +120°C.

Voltage rating: 300 V rms.

Current rating: 1 ampere.

Materials:

Contacts: The contacts shall be phosphor bronze or brass. Phosphor bronze shall be in accordance with ASTM B139, copper alloy UNS No. C51000. Brass shall be in accordance with copper alloy CDA 260, spring temper; or copper alloy UNS No. C72500 spring temper in accordance with ASTM B122.

Contact plating:

Contact area: Gold in accordance with MIL-DTL-83503.

Solder tail termination area: Gold or tin-lead in accordance with MIL-DTL-83503.

Housing: Glass filled polyester in accordance with MIL-M-24519, type GPT-15F, GPT-20F, GPT-30F.

Accessories: Parts may be constructed of polyester in accordance with MIL-M-24519 or other materials specified in MIL-DTL-83503, provided these parts do not come in contact with current carrying components.

Polarization key: Shall be permanently attached to header (added feature key shall be bonded to header).

Mating connector: See MIL-DTL-83503/7.

Solderless wrappost contacts:


Wrappost geometry: .045 inch (1.14 mm) square wrappost in accordance with figures 2 and 3.

Parallelism: See figure 3 and table.

Tip configuration: The tip configuration of the wrappost shall terminate in a radius or bevel to facilitate insertion of the wrapping tool. See figure 3.

Solderless wrappost contact wire accommodation: 26 or 28 AWG solid.

MIL-DTL-83503/21D
w/AMENDMENT 1

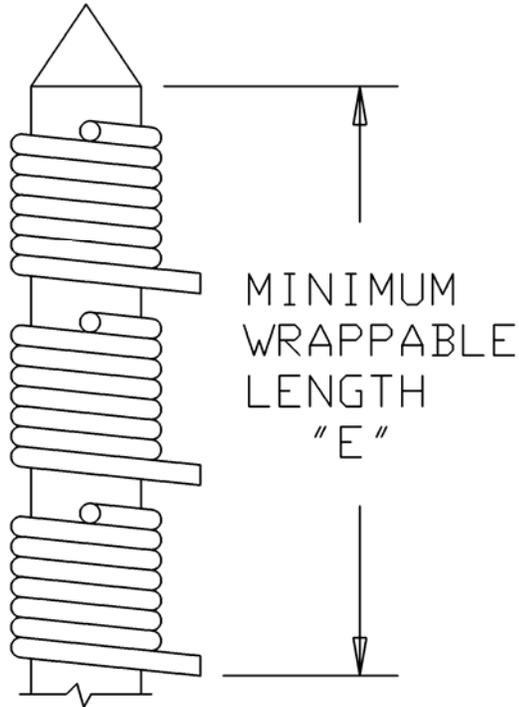


Number of wrapped corrections	"E" Length	
	Wire gage 28 inch (mm)	Wire gage 26 inch (mm)
1	.219 (5.56)	.226 (5.74)
2	.388 (9.85)	.402 (10.21)
3	.557 (14.15)	.578 (14.68)

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 2. Wrappable length (typical connection).

MIL-DTL-83503/21D
w/AMENDMENT 1

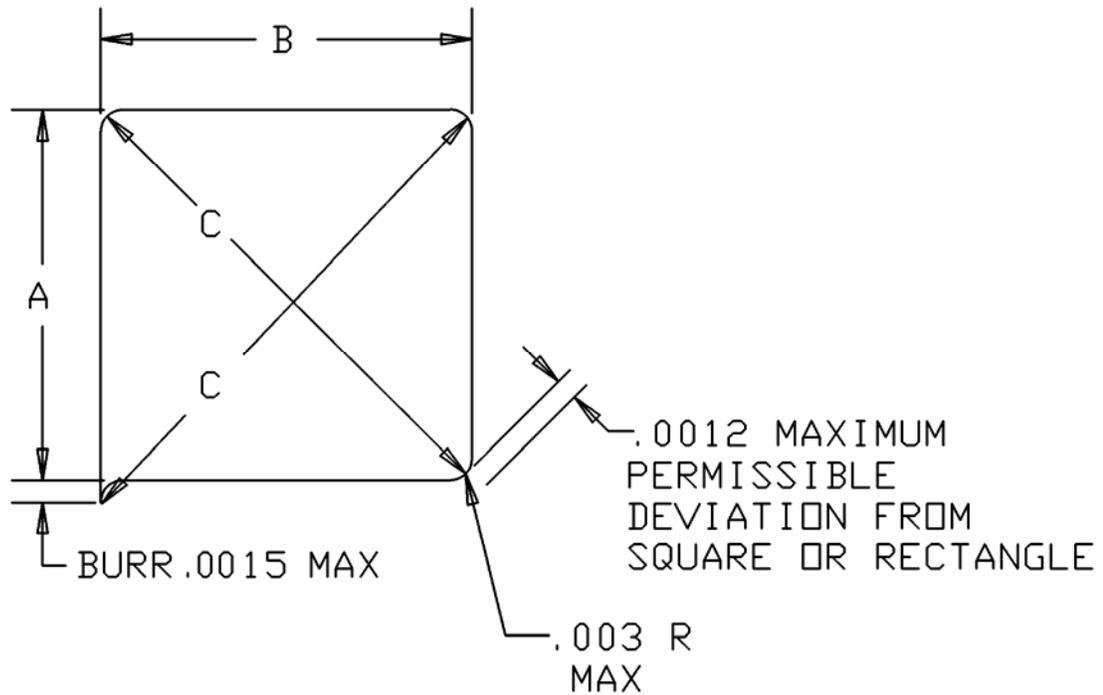

Inches	mm
.0012	0.030
.0015	0.038
.003	0.076

A inch (mm)	B inch (mm)	C inch (mm)	Parallelism inch (mm)	Straightness Inch/inch
.045 (1.14) nominal .042 (1.07) min	.045 (1.14) nominal .042 (1.07) min	.066 (1.68) max .059 (1.50) min	.005 (0.13)	.005

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. If the tip of the wrappost terminates in a bevel, the apex of the bevel shall be flat, with no side of the flat exceeding .020 inch.

FIGURE 3. Wrappost geometry.

MIL-DTL-83503/21D
w/AMENDMENT 1

Withstanding voltage:

Sea level: 500 V rms, minimum.

Altitude: 200 V rms, minimum.

Cable retention: Not applicable.

Connector-cable flexing: Not applicable.


Contact resistance: 50 milliohms, maximum.

Latch retention: The latch shall retain the mating connector when the cable retention force is applied to the mating connector cable. The latch shall also function as an ejector to eject mating connector.

Marking:

Part or identifying number (PIN): The PIN shall consist of the letter "M", followed by the basic specification number, "/", the specification sheet number, "-" and dash number from table I.

Example:

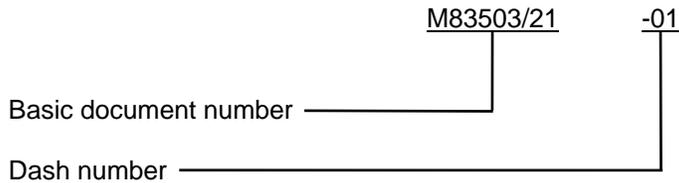

Contact identification: Molded triangle " Δ " or notch to show number 1 contact, or raised numbers to show position number "1".

MIL-DTL-83503/21D
w/AMENDMENT 1

Referenced documents: In addition to MIL-DTL-83503, this document references the following:

MIL-M-24519
MIL-DTL-83503/7
ASTM B122
ASTM B139
CDA 260

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4771-000)

Review activities:
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://www.dodssp.daps.mil>.

PROJECT NUMBER 5935-4771-000	COMPILATION OF COMMENTS	(DOD use only) COMMENT NUMBER
DOCUMENT NUMBER MIL-DTL-83503/21D w/Amd 1	COMMENTOR (NAME OR CODE)	<input type="checkbox"/> MFR <input type="checkbox"/> USER <input type="checkbox"/> IND ASSOC
OF COMMENTS	<input type="checkbox"/> MODIFY <input type="checkbox"/> DISCUSS	
FINAL DISPOSITION OF COMMENTS	<input type="checkbox"/> ACCEPTED <input type="checkbox"/> NON-ACCEPTED <input type="checkbox"/> WITHDRAWN <input type="checkbox"/> MODIFIED	

DSCC FORM 155B

PROJECT NUMBER 5935-4771-000	COMPILATION OF COMMENTS	(DOD use only) COMMENT NUMBER
DOCUMENT NUMBER MIL-DTL-83503/21D w/Amd 1	COMMENTOR (NAME OR CODE)	<input type="checkbox"/> MFR <input type="checkbox"/> USER <input type="checkbox"/> IND ASSOC
OF COMMENTS	<input type="checkbox"/> MODIFY <input type="checkbox"/> DISCUSS	
FINAL DISPOSITION OF COMMENTS	<input type="checkbox"/> ACCEPTED <input type="checkbox"/> NON-ACCEPTED <input type="checkbox"/> WITHDRAWN <input type="checkbox"/> MODIFIED	

DSCC FORM 155B