

DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL,
COVER, PROTECTIVE, LAUNCHER RECEPTACLE FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83538.

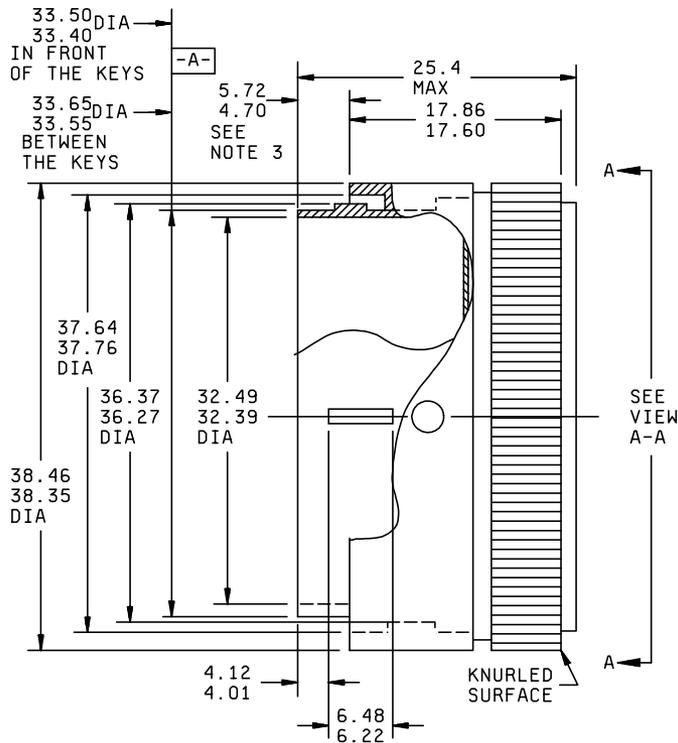


FIGURE 1. Protective cover launcher receptacle.

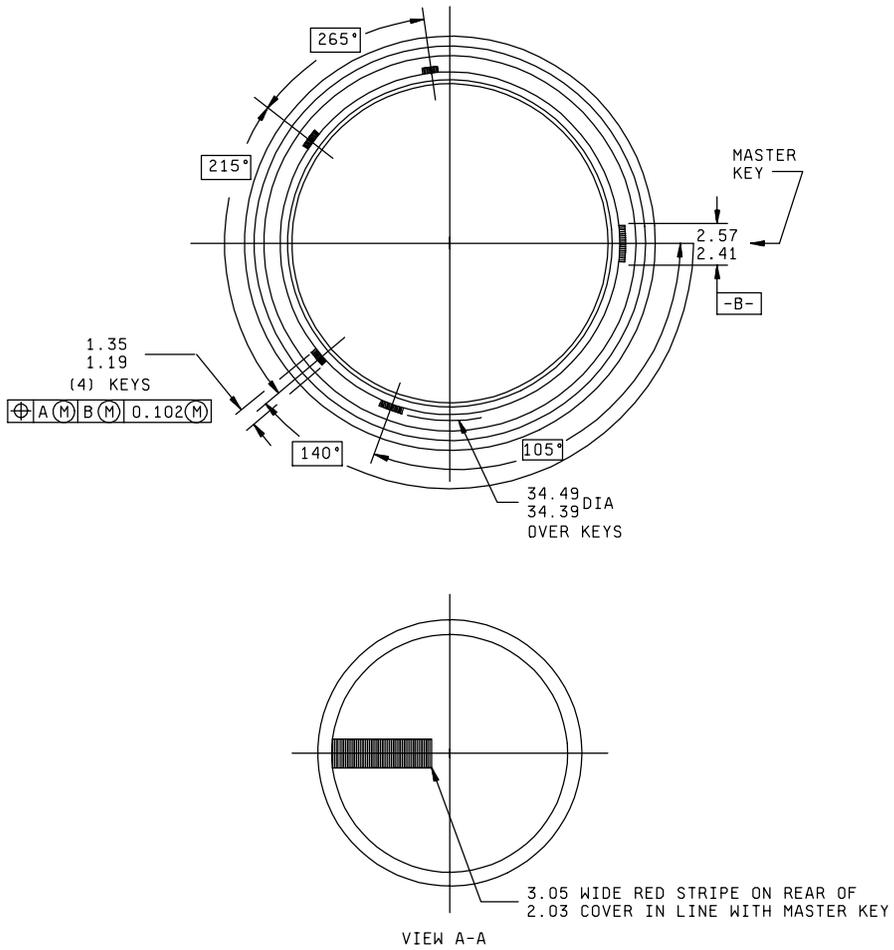


FIGURE 1. Protective cover launcher receptacle - Continued.

mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.102	0.004	3.05	0.120	6.48	0.255	33.40	1.315	37.64	1.412
1.19	0.047	4.01	0.019	17.60	0.693	33.50	1.319	37.76	1.487
1.35	0.053	4.12	0.162	17.86	0.703	34.39	1.354	38.35	1.510
2.03	0.080	4.70	0.185	25.4	1.00	34.49	1.358	38.46	1.514
2.41	0.095	5.72	0.225	32.39	1.275	36.27	1.428		
2.57	0.101	6.22	0.245	32.49	1.279	36.37	1.432		

NOTES:

1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.
3. The 5.72 - 4.70 dimension is when the coupling nut is pushed toward the rear.

FIGURE 1. Protective cover launcher receptacle - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This protective store cover is used with MIL-DTL-83538/4.

Part or Identifying Number (PIN) example: M83538/8.

CONCLUDING MATERIAL

Custodians:

- Army - CR
- Navy - AS
- Air Force - 85

Preparing activity:

DLA - CC

Review activities:

- Army - AR, MI
- Navy - EC, MC, OS
- Air Force - 11, 17, 19, 99

(Project 5935-4112-07)