


MILITARY SPECIFICATION SHEET

HANDSET, H-156()/PT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the handset described herein shall consist of this document and the latest issue in effect of Specification MIL-H-11996.

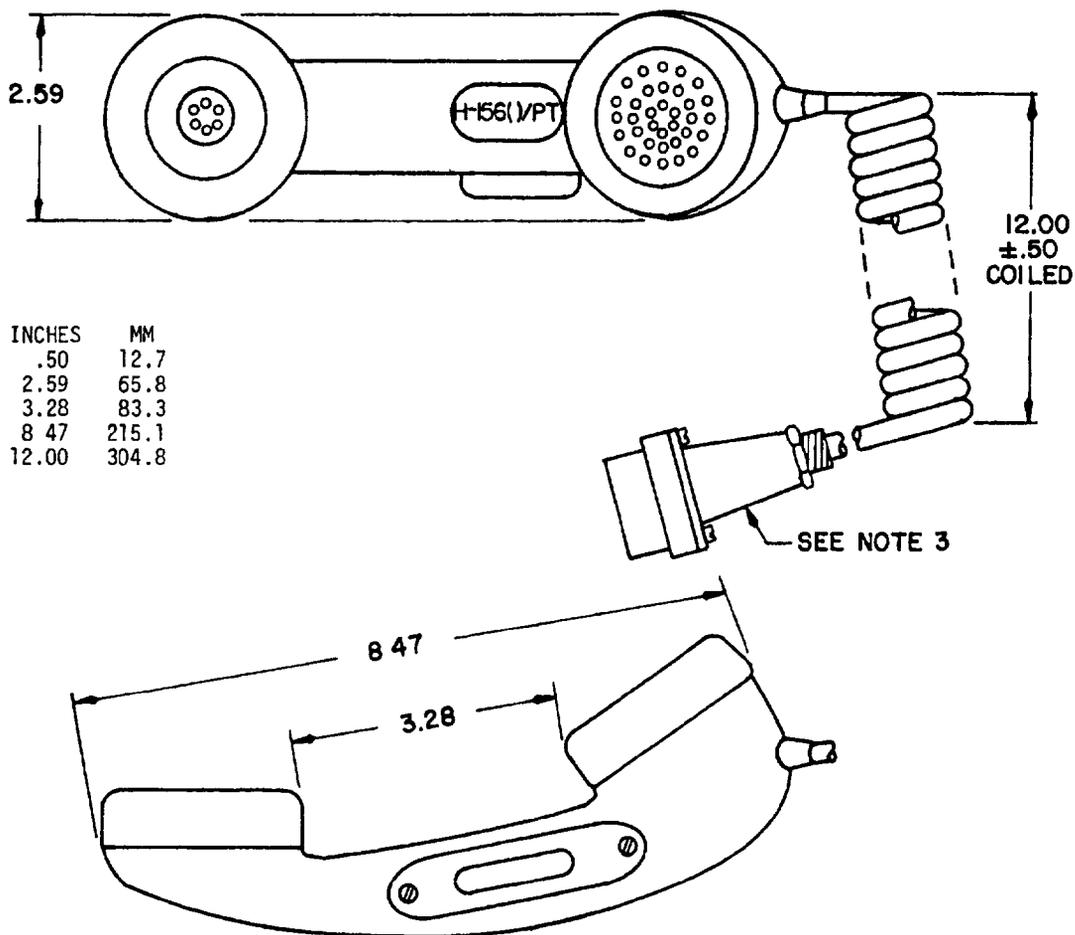

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The connector is the U-161/U.

FIGURE 1. Handset, H-156()/PT, assembly.

MIL-H-11996/2

REQUIREMENTS:

Dimensions and configurations: See figure and SC-DL76453 except cord.

Handset. H-156()/PT includes the following

Handset assembly - SC-D-76454.

Switch - SA-129()/PT - SC-DL-207960.

Transmitter - Per MIL-H-11996.

Receiver - Per MIL-H-11996.

Cord or cordage - The cord shall be constructed in accordance with SC-D-76457.

Cord assembly - The cord assembly shall be in accordance with MIL-I-4997

The operating temperature requirements for this cord are -60°F to +160°F. (The high temperature includes sun-load). The connector is U-161/U.

Part number: H-156()/PT.

Custodians

Army - CR

Air force - 85

Review activities:

Army - M1

Air Force - 17, 99

DLA - ES

Preparing activity

Army - CR

Agent

DLA - ES

(Project 5965-0170-2)