


PERFORMANCE SPECIFICATION SHEET
 FUSEHOLDERS, EXTRACTOR POST TYPE,
 BLOWN FUSE INDICATING, TYPES FHL11U AND FHL11G

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

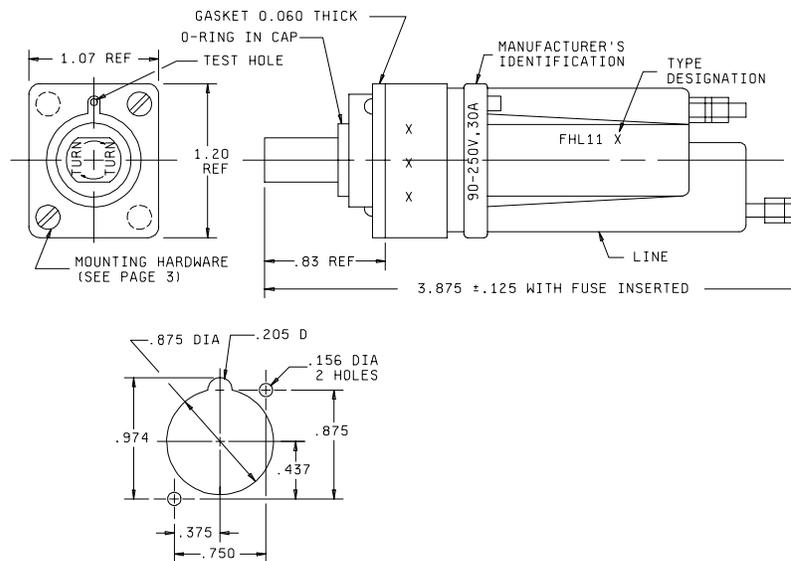


Inches	mm	Inches	mm	Inches	mm
.060	1.52	.437	11.10	1.070	27.18
.125	3.18	.750	19.05	1.200	30.48
.156	3.96	.830	21.08	3.875	98.43
.205	5.21	.875	22.23		
.375	9.53	.974	24.74		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two place decimals and ± 0.005 (0.13mm) for three-place decimals.

FIGURE 1. Type FHL11U and type FHL11G fuseholders.

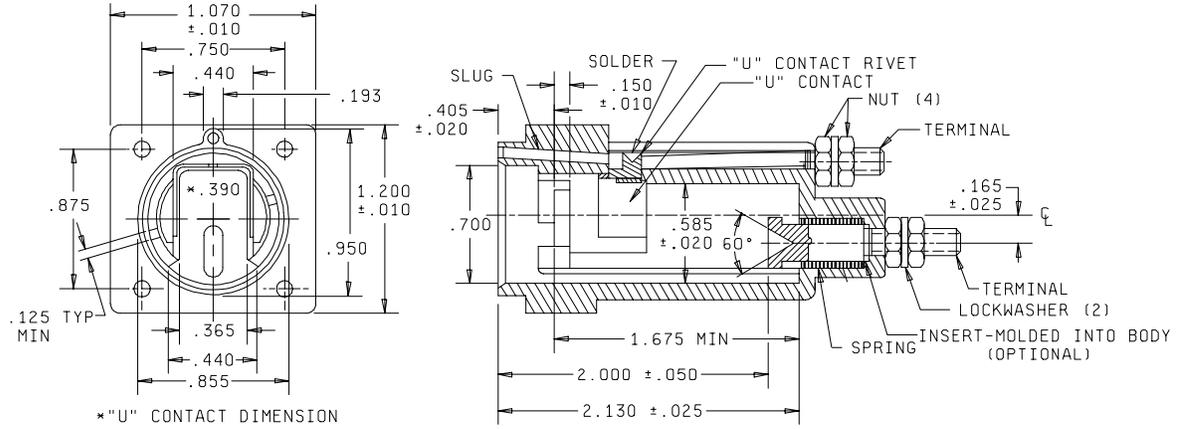

Part or Identifying Number (PIN): FHL11U-001 - Body for FHL11U
 FHL11G-002 - Body for FHL11G

NOTES: Fuse carrier for FHL11U-001 shall be FHL10U-003.
 Fuse carrier for FHL11G-002 shall be FHL10G-004.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.010	0.25	.165	4.19	.700	17.78	1.200	30.48
.020	0.51	.193	4.90	.750	19.05	1.675	42.55
.025	0.64	.365	9.27	.855	21.72	2.000	50.80
.050	1.27	.405	10.29	.875	22.23	2.130	54.10
.125	3.18	.440	11.18	.950	24.13		
.150	3.81	.585	14.86	1.070	27.18		

FIGURE 2. Body for FHL11U and FHL11G fuseholders.

MIL-PRF-19207/2G

REQUIREMENTS:

Interface and physical dimensions: See figures 1 and 2.

Cap and body molding material: Cap and body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation.

Ferrule type:

Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length.

Styles: MIL-PRF-15160, F02 and F03 and MIL-PRF-23419, FM09.

(or equivalent size and styles)

Poles: One

Rating: 30 amperes, 90-250 volts.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Indicating: Neon lamp with clear cap.

Lamp series resistor: MIL-PRF-39017/1, 120,000 ohms, 0.25 watt.

Terminals: Stud type, No. 8-32 UNC-2A thread.

Enclosure: Unsealed: FHL11U.
Dripproof: FHL11G (see note 1)

Test fuses:

Temperature rise: F03A125V30A of MIL-PRF-15160/3.

Short circuit: F03A250V15A of MIL-PRF-15160/3.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Terminals - 15 pounds-inch.

Salt spray (corrosion): Test condition B.

Mounting hardware:

Screw: 6-32UNC-2A, 7/8-inch long (min).
Pan/round head with sealing washer or pan self-sealing.

Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

NOTES:

1. All of the type FHL11G fuseholders submitted for delivery shall have been subjected to the dripproof test as specified in 4.6.16.2 of MIL-PRF-19207.
2. Cap and body molding material: It is suggested that type MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the cap and body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.

MIL-PRF-19207/2G

Marginal notations are not used in this version to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - CR
Navy - SH
Air force - 11
DLA - CC

Preparing Activity:
DLA - CC

(Project 5920-0662)

Review Activities:

Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 70, 71, 99