

INCH POUND

MIL-PRF-3098/40E
27 August 1997
SUPERSEDING
MIL-C-3098/40D
4 October 1976


PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNITS, QUARTZ, CR62/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 0.8 MHz to 20 MHz; fundamental: controlled; antiresonance.

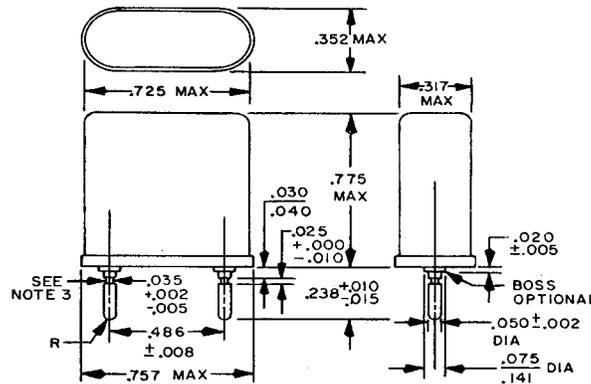

Inches	mm	Inches	mm
.002	.05	.050	1.27
.005	.13	.075	1.91
.008	.20	.141	3.58
.010	.25	.238	6.05
.015	.38	.317	8.05
.020	.51	.352	8.94
.025	.64	.486	12.34
.030	.76	.725	18.42
.035	.89	.757	19.23
.040	1.02	.775	19.69

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR62/U.

MIL-PRF-3098/40E

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 0.8 MHz to 20 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerances:

Operating temperature range: ± 10 parts per million (ppm).

Room temperature: : ± 70 ppm.

Frequency stability: ± 5 ppm.

Equivalent resistance: See table I.

Antiresonance, load capacitance: 32.0 pF ± 0.2 pF.

Mode of oscillation: Fundamental.

Reference temperature: $+75^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

Temperature ranges:

Operable: -55°C to $+70^{\circ}\text{C}$ and $+80^{\circ}\text{C}$ to $+90^{\circ}\text{C}$, inclusive.

Operating (controlled): $+70^{\circ}\text{C}$ to $+80^{\circ}\text{C}$, inclusive.

Rated drive level: 1.0 mW, maximum.

Shock (specified pulse):

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 15 percent.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 15 percent.

Thermal shock:

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 15 percent.

Aging:

Frequency change permitted: ± 5 ppm.

MIL-PRF-3098/40E

TABLE I. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
<u>MHz</u>	<u>Ohms</u>
0.80 to 0.90	600
0.90+ to 1.00	570
1.00+ to 1.12	540
1.12+ to 1.25	490
1.25+ to 1.37	450
1.37+ to 1.50	410
1.50+ to 1.62	370
1.62+ to 1.75	330
1.75+ to 1.87	300
1.87+ to 2.00	290
2.00+ to 2.12	270
2.12+ to 2.25	240
2.25+ to 2.60	190
2.60+ to 3.00	150
3.00+ to 3.40	110
3.40+ to 3.75	90
3.75+ to 4.00	75
4.00+ to 5.00	60
5.00+ to 7.00	35
7.00+ to 10.00	24
10.00+ to 15.00	22
15.00+ to 20.00	20

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - CR
Navy - EC
Air force - 85

Review activities:

Army - AR, MI,
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:

Army - CR

Agent:

DLA - CC

(Project 5955-0697-22)