

INCH POUND

MIL-PRF-3098/61H
27 August 1997
SUPERSEDING
MIL-C-3098/61G
28 June 1995

PERFORMANCE SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR84/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 17 MHz to 61 MHz; third mechanical overtone; noncontrolled; series resonance.

Inches	mm
.002	.05
.003	.08
.008	.20
.010	.25
.015	.38
.025	.64
.030	.76
.040	1.02
.150	3.81
.175	4.45
.183	4.65
.192	4.88
.238	6.05
.402	10.21
.435	11.05
.530	13.46

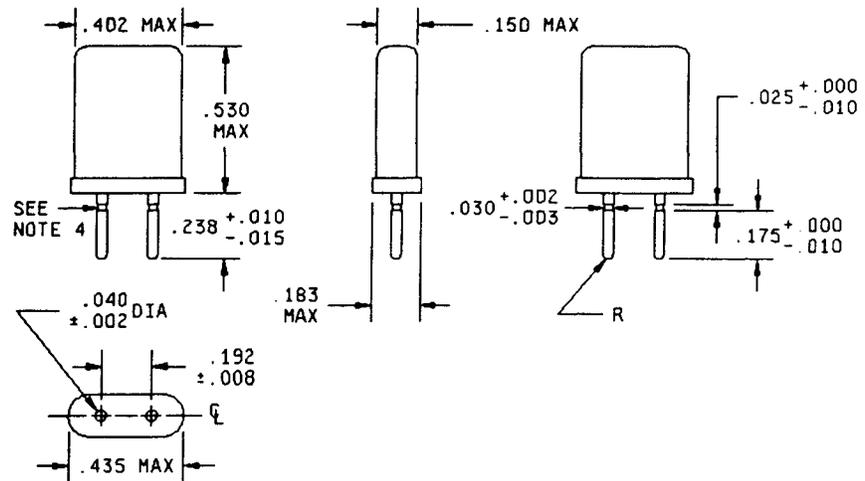

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.
4. The pin undercut may be omitted.

FIGURE 1. Crystal unit - CR84/U.

MIL-PRF-3098/61H

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 17.0 MHz to 61.0 MHz, inclusive.

Frequency tolerances:

Operating temperature range: ± 20 parts per million (ppm).

Room temperature range: ± 70 ppm.

Frequency stability: ± 5 ppm.

Equivalent resistance: 40 ohms, maximum.

Drive level: 1.0 mW maximum.

Resonance: Series.

Mode of oscillation: Third mechanical overtone.

Reference temperature: $+85^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

Operating temperature ranges:

Operable: -55°C to $+80^{\circ}\text{C}$, and $+90^{\circ}\text{C}$ to $+105^{\circ}\text{C}$, inclusive.

Operating: $+80^{\circ}\text{C}$ to $+90^{\circ}\text{C}$, inclusive.

Capacitance, shunt: 7pF, maximum.

Shock (specified pulse):

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Thermal shock:

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Vibration: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

MIL-PRF-3098/61H

Aging:

Frequency change permitted: ± 5 ppm.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - CR

Navy - EC

Air force - 85

Review activities:

Army - AR, MI

Navy - AS, MC, SH

Air Force - 17, 19

Preparing activity:

Army - CR

Agent:

DLA - CC

(Project 5955-0697-37)