

INCH-POUND

MIL-PRF-39012/10D
AMENDMENT 2
10 August 1998
SUPERSEDING
AMENDMENT 1
5 June 1989


PERFORMANCE SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, COAXIAL, RADIO FREQUENCY,
(SERIES C (CABLED), MALE, RIGHT ANGLE, CLASS 2)

This amendment forms a part of MIL-PRF-39012/10D, dated 3 October 1986, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, delete and substitute new figure 1 as follows:

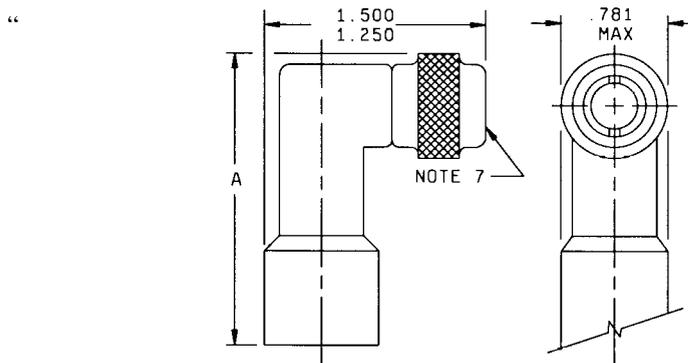

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For dimension A see table I.
4. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
5. Wrench flats to accommodate standard wrench in accordance with FED-STD-H28, appendix 10.
6. All undimensioned pictorial configurations are for reference purposes only.
7. Series C, pin contact interface in accordance with MIL-STD-348.

FIGURE 1. General configuration.

MIL-PRF-39012/10D
AMENDMENT 2

PAGE 4

- * REQUIREMENTS, Mating characteristics, Insertion force: Delete "7 pounds, maximum when inserted a minimum of .125." and substitute "15 pounds, maximum when inserted a minimum of .125."

NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective to the marginal notations of relationship to the last previous amendment.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, AV, EA, MI
Air Force - 11, 17, 99
Navy - AS, MC, OS, SH

Preparing activity:
DLA - CC

(Project 5935-4160-01)