



DEFENSE LOGISTICS AGENCY
 DEFENSE SUPPLY CENTER, COLUMBUS
 3990 EAST BROAD STREET
 COLUMBUS, OH 43216-5000

IN REPLY
 REFER TO

DSCC-VAT

17 June 2004

MEMORANDUM FOR MILITARY/INDUSTRY DISTRIBUTION

SUBJECT: Proposed Drafts of MIL-PRF-39016 Specification Sheets

The initial drafts of the following documents are now available for viewing and downloading from the DSCC-VA Web site:

Specification Sheet	Project #
MIL-PRF-39016/7G	5945-1246
MIL-PRF-39016/8G	5945-1247
MIL-PRF-39016/9J	5945-1248
MIL-PRF-39016/10G	5945-1249
MIL-PRF-39016/11G	5945-1250
MIL-PRF-39016/12G	5945-1251
MIL-PRF-39016/13J	5945-1252
MIL-PRF-39016/15K	5945-1253
MIL-PRF-39016/16G	5945-1254
MIL-PRF-39016/20J	5945-1255
MIL-PRF-39016/21G	5945-1256

Specification Sheet	Project #
MIL-PRF-39016/23F	5945-1257
MIL-PRF-39016/24F	5945-1258
MIL-PRF-39016/25F	5945-1259
MIL-PRF-39016/26F	5945-1260
MIL-PRF-39016/27F	5945-1261
MIL-PRF-39016/28F	5945-1262
MIL-PRF-39016/29G	5945-1263
MIL-PRF-39016/30F	5945-1264
MIL-PRF-39016/35C	5945-1265
MIL-PRF-39016/41E	5945-1266
MIL-PRF-39016/43E	5945-1267

<http://www.dsccols.com/Programs/MilSpec>

or

<http://www.dscc.dla.mil/Programs/MilSpec/DocSearch.asp>

The proposed drafts of the documents are forwarded for your review and comment. The proposed changes reflect updates as required by MIL-STD-961, standardizing the terminology for the mounting pads, deletion of the particle impact noise (PIND), incorporation of previous amendments, and correcting editorial errors.

If these documents are of interest to you, please submit your typed comments or suggestions using electronic mail or by letter. Comments may be resubmitted if it is believed that insufficient consideration has been given to previous comments. Please provide additional justification for these items. Comments or suggested changes that are not editorial in nature should include justification. Industrial activities should indicate whether they are commenting from the standpoint of a "User" or "Manufacturer." Military review activities should forward comments to their custodians in sufficient time to allow for consolidating the departmental reply. All Navy review activities are requested to send their comments to this center in lieu of the Navy - EC custodian. All agencies, industry, and coordinated custodian comments should be sent to this center. Comments originating from the military departments must be identified as either "Essential" or "Suggested." Essential comments, which must be accepted or withdrawn, should be supported by test data unless they obviously require no data.

Comments should be returned to this Center no later than 45 days from the date of this letter. If no response is received by the specified date, it is assumed that you concur with the document. Any further coordination concerning this document will be circulated only to firms and organizations that furnish comments or reply that they have an interest.

If there are any questions, please contact Mr. Jim Crum, by electronic mail at james.crum@dla.mil (preferred method of notification); by telephone at commercial 614-692-0542, DSN 850-0542; by facsimile 614-692-6939; or by mail at Defense Supply Center Columbus, Electronic Components Team, DSCC-VAT, P.O. Box 3990, Columbus, OH 43216-5000.

Signature on File

KENDALL A. COTTONGIM
Chief
Electronic Components Team

22 Attachments

**NOTE: This draft, dated 17 June, 2004 prepared by DLA-CC has not been approved and is subject to modification.
DO NOT USE FOR ACQUISITION PURPOSES. (Project # 5945-1261)**

INCH-POUND


MIL-PRF-39016/27F
DRAFT
 SUPERSEDING
 MIL-PRF-39016/27E
 20 July 1988

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL
 TO 0.5 AMPERE (LATCHING) WITH INTERNAL DIODES FOR COIL TRANSIENT SUPPRESSION

This specification sheet is approved for use by all Departments
 and Agencies of the Department of Defense.


The complete requirements for acquiring the relays described herein shall
 consist of this specification sheet and the latest issue of MIL-PRF-39016.

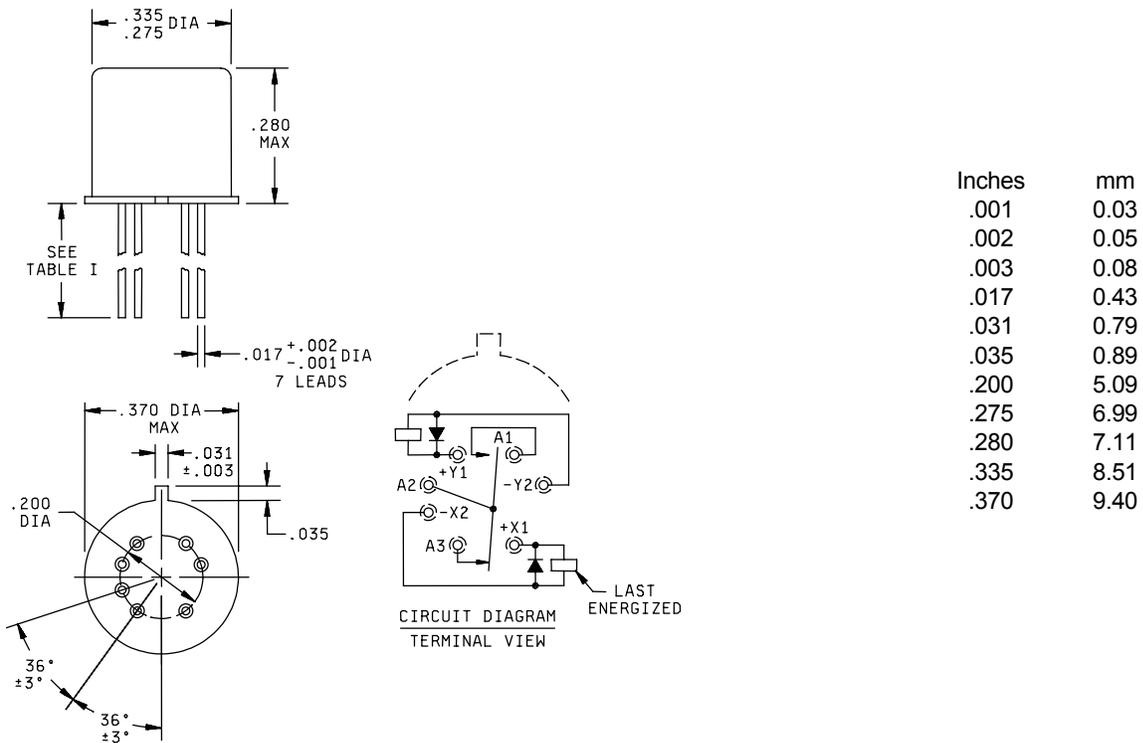

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .010$ (0.25 mm).
4. Terminal numbers shown above are for reference only. Numbers do not appear on the relay.
5. Relays shall have a plus (+) sign placed on the circuit diagram as shown.
6. All leads shall be electrically insulated from the case.
7. Coil symbol optional in accordance with MIL-STD-1285.
8. Circuit diagram shown on part is the terminal view.

FIGURE 1. Dimensions and configuration.

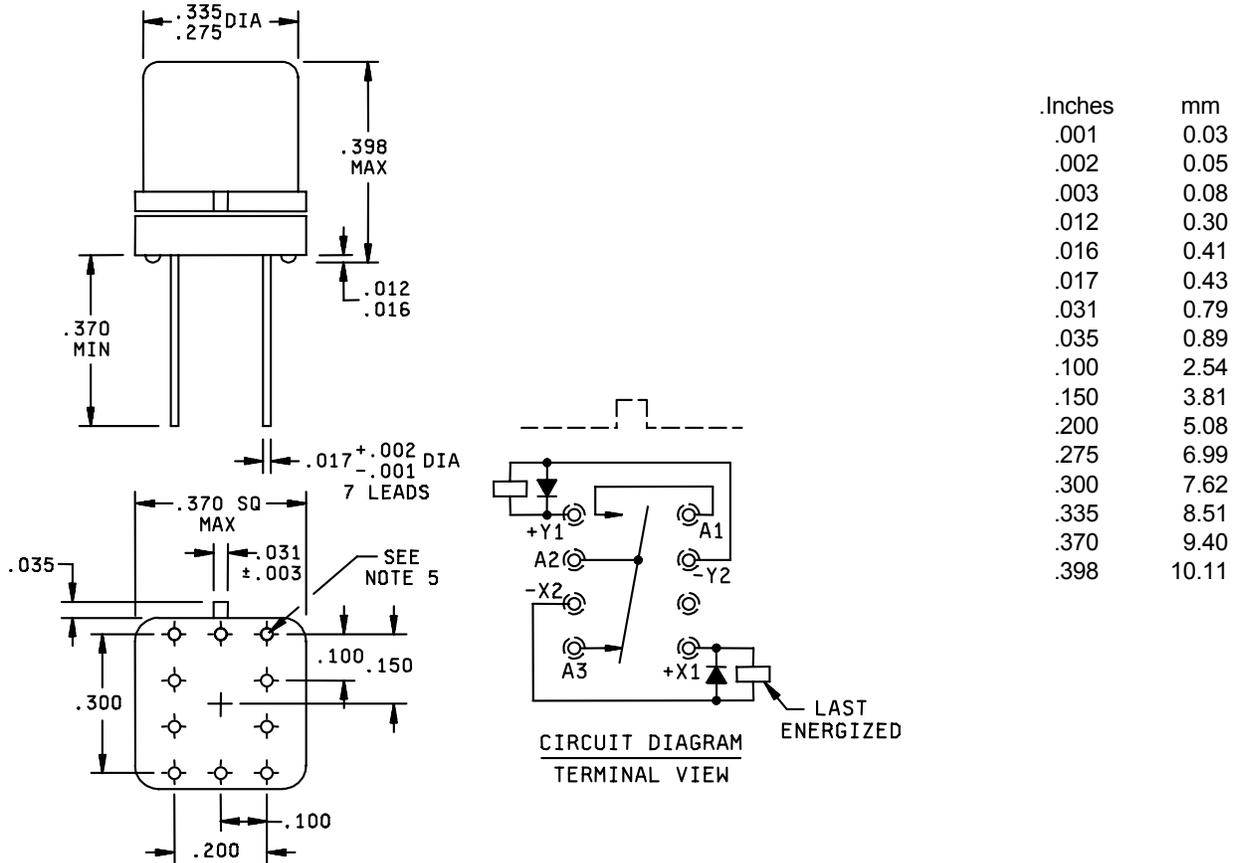

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 0.10 (0.25 mm).
4. Spreader mounting pads shall comply with the requirements of A-A55485, A-55485/05-003, or A-A55485/05-013.
5. Dimensions and tolerances shown for the bottom view of the spreader mounting pad are for the center-to-center locations of the holes in the spreader mounting pad.
6. Shape optional within envelope dimension.
7. Terminal numbers shown above for reference only. Numbers do not appear on relay.
8. Relays shall have a plus (+) sign placed on the circuit diagram as shown.
9. All leads shall be electrically insulated from the case.
10. Coil symbol optional in accordance with MIL-STD-1285.
11. Circuit diagram shown on part is the terminal view.

FIGURE 2. Dimensions and configuration relay with spreader mounting pad attached.

REQUIREMENTS:

CONTACT DATA:

Load ratings:

High level (relay case grounded):

Resistive:

0.5 ampere at 28 V dc.

250 milliamperes at 115 V ac 60 and 400 Hz case not grounded.

100 milliamperes at 115 V ac 60 and 400 Hz case grounded.

Inductive load: 0.2 ampere at 28 V dc with 0.32 henry inductance.

Lamp: 0.10 ampere at 28 V dc.

Low level: 10 to 50 μ A at 10 to 50 mV dc or peak ac.

Intermediate current: Applicable.

Contact resistance or voltage drop:

Initial: 0.125 ohm maximum (0.150 ohm maximum with spreader mounting pad attached).

High level:

During life: Not more than 5 percent of open circuit voltage.

After life: 0.225 ohm maximum (0.250 ohm maximum with spreader mounting pad attached).

Low level:

During life: 33 ohms maximum.

After life: 0.175 ohm maximum (0.200 ohm maximum with spreader mounting pad attached).

Intermediate current:

During: 1 ohm maximum.

After: 0.225 ohm maximum (0.250 ohm maximum with spreader mounting pad attached).

Contact bounce: 1.5 milliseconds maximum (applicable to failure rate level "L").

Contact stabilization time: 2.0 milliseconds maximum (applicable to failure rate levels "M", "P", and "R").

Overload (high level only): Two times rated current. Not applicable to ac load ratings.

Neutral screen: Applicable.

MIL-PRF-39016/27F

COIL DATA: See table I.

Operate time: 1.5 ms maximum over temperature range with rated coil voltage.

Release time: Not applicable.

ELECTRICAL DATA:

Insulation resistance: 10,000 megohms minimum at 500 V dc, except the resistance between coil and case at high temperature shall be 1,000 megohms minimum.

Dielectric withstanding voltage:

	Sea level V rms (60 Hz)	Post intermediate current life test Sea level V rms (60 Hz)	Altitude V rms (60 Hz)
Between case, frame, or enclosure and all contacts in the energized and de-energized positions.	500	500	125 All terminals to case
Between case, frame, or enclosure and coils.	500	500	
Between all contacts and coils.	500	500	
Between open contacts in the energized and de-energized positions.	500	375	
Between contact poles.	N/A	N/A	
Between coils of dual coil relays.	500	500	

DIODE CHARACTERISTICS: 1/

Maximum transient voltage: 1 volt.

Coil transient suppression: Applicable.

Semiconductor in-process screening: Applicable, visual inspection of semiconductors shall be in accordance with MIL-STD-750, method 2073, or 2074.

ENVIRONMENTAL DATA:

Temperature range: -65°C to +125°C.

Vibration (sinusoidal): MIL-STD-202, method 204. Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Vibration (random): MIL-STD-202, method 214, test condition IG. Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts (applicable to qualification and group C testing only).

Shock (specified pulse): MIL-STD-202, method 213, test condition B (75 g's). Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Magnetic interference: Applicable.

1/ WARNING: Reverse polarity on coil terminals will destroy diode.

MIL-PRF-39016/27F

Resistance to soldering heat: Applicable.

Acceleration: Applicable.

Salt atmosphere (corrosion): In accordance with MIL-STD-750, method 1041.

PHYSICAL DATA:

Terminal strength (MIL-STD-202, method 211):

Pull test: Test condition A, 1 pound pull.

Bend test: Test condition C, ½ pound load.

Twist test: As specified in MIL-PRF-39016.

Solderability: Applicable.

Dimensions and configuration: See figure 1 and 2.

Weight: 2.27 grams (0.08 ounce) maximum, 2.52 grams (0.089 ounce) maximum with spreader mounting pads attached).

Seal: Hermetic.

Minimum marking: Military part number, "J" with the date code (example J0430), circuit diagram, manufacturer's name or source code.

LIFE TEST REQUIREMENTS:

High level: 100,000 cycles per relay.

Low level: 100,000 cycles plus 900,000 cycles mechanical life.

Part or Identifying Number (PIN): M39016/27- (dash number from table I and suffix letter designating failure rate level).

TABLE I. Dash numbers and characteristics. 1/ 2/

Dash numbers 3/				Coil voltage (V dc) 6/		Coil resistance ohms ±10%	At 25°C	At 125°C
Lead length 1.500 min 4/	Lead length .187 ±.010	Lead length .500 min	Spreader mounting pads (fig. 2) 5/				Specified pickup (latch/reset) value (voltage) (V dc)	Specified pickup (latch/reset) value (voltage) (V dc)
				Rated	Max			
013	019	025	031	5.0	5.8	61	2.8	3.7
014	020	026	032	6.0	8.0	125	3.5	4.5
015	021	027	033	9.0	12	280	5.3	6.8
016	022	028	034	12	16	500	7.0	9.0
017	023	029	035	18	24	1,130	10.5	13.5
018	024	030	036	26.5	32	2,000	14.2	18.0

- 1/ Each relay possesses high level and low level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuits not recommended for subsequent use in low level applications.
- 2/ WARNING: When latching relays are installed in equipment, the latch and reset coils should not be pulsed simultaneously. Coils should not be pulsed with less than the nominal coil voltage and the pulse width should be a minimum of three times the specified operate time of the relay. If these conditions are not followed, it is possible for the relay to be in the magnetically neutral position.
- 3/ The suffix letter L, M, P, or R to designate the applicable failure rate level shall be added to the applicable listed dash number. Failure rate level (percent per 10,000 cycles): L, 3.0; M, 1.0; P, 0.1; R, 0.01. Example, 013L - - - - -036R.
- 4/ 1.500 leads are inactive for new design.
- 5/ Relays supplied with spreader mounting pads (-031 through -036) shall have the spreader mounting pad rigidly attached.
- 6/ CAUTION: The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

QUALIFICATION INSPECTION:

Qualification inspection and sample unit size: See table II.

TABLE II. Qualification inspection and sample size. 1/

Single submission	Group submission	
18 units plus 1 open unit for level L at C = 0 2/ 33 units plus 1 open unit for level M at C = 0 2/ Qualification inspection as applicable	M39016/27-030	18 units plus 1 open unit for level L at C = 0 2/ 33 units plus 1 open unit for level M at C = 0 2/ Qualification inspection as applicable
	M39016/27-025 M39016/27-026 M39016/27-027 M39016/27-028 M39016/27-029	2 units each PIN Qualification inspection, Q2.

- 1/ For retention of qualification or extension of qualification to lower failure rate levels, all life test data accumulated on MIL-PRF-39016/28, /29, and /30 may be used in addition to MIL-PRF-39016/27 data. Prior to performance of qualification or retention of qualification testing, the relay manufacturer shall preselect the sampling plan.
- 2/ The number of units required for qualification testing shall be increased as required in Q5, MIL-PRF-39016, if the relay manufacturer elects to test the number of units permitting one or more failures. Prior to performance of qualification inspection testing, the relay manufacturer shall preselect the sampling plan.

Initial qualification of relays supplied with spreader mounting pads (-031 through -036) shall be tested as specified below:

Perform the following tests as specified in the qualification inspection table of MIL-PRF-39016, in the order shown below:

Before installation of spreader mounting pad; screening, visual and mechanical examination (internal), thermal shock, resistance to solvents, vibration (sinusoidal), vibration (random), shock (specified pulse), acceleration, terminal strength, magnetic interference (when specified), coil life (applicable to continuous duty relays only), resistance to soldering heat, salt spray (corrosion), overload (applicable to high level relays only), life, terminal strength, and intermediate current.

After installation of spreader mounting pad perform the following tests as specified in the qualification inspection table of MIL-PRF-39016 in the order shown below:

Insulation resistance, dielectric withstanding voltage, static contact resistance; pickup voltage, hold voltage, and dropout voltage, coil resistance, operate and release time, contact dynamic characteristics, coil transient suppression (when specified), solderability, seal, visual and mechanical inspection (external).

MIL-PRF-39016/27F

Qualification inspection (reduced testing for previously qualified relays) for relays supplied with spreader mounting pads (-031 through -036), two (2) units of the 26.5 volt rated coil voltage (-036) shall be tested as specified below:

Before installation of spreader mounting pad, perform the following tests as specified in the qualification inspection table of MIL-PRF-39016 in the order shown below:

For failure rate level L only. Screening.

For failure rate levels M, P, and R: Vibration (sinusoidal) test duration shall be 10 minutes, vibration (random), and screening.

After installation of spreader mounting pad perform the following tests as specified in the qualification inspection table of MIL-PRF-39016 in the order shown below:

Insulation resistance, dielectric withstanding voltage, static contact resistance, specified pickup (latch/reset value (voltage), coil resistance, operate and release time, contact dynamic characteristics, coil transient suppression (when specified), solderability, seal, visual and mechanical inspection (external).

Group A testing for relays supplied with spreader mounting pads (-031 through -036), shall be tested as specified below:

Perform seal test immediately, preceding the A2 electrical tests. Relay leads shall be formed and the spreader mounting pad removed before the seal test. After the seal test, the spreader mounting pad shall be rigidly attached to the relay and the remaining group A tests performed.

Qualification inspection (reduced testing) and sample size: See table III.

If the relays produced for MIL-PRF-39016/27 are similar in construction and design except for the contact arrangement, diodes, and headers, as applicable to the relays produced for MIL-PRF-39016/28, /29, and /30, then reduced testing for qualification of MIL-PRF-39016/27 relays may be performed concurrent with or subsequent to successful qualification of MIL-PRF-39016/28, /29, and /30. For reduced testing, see table III.

TABLE III. Qualification inspection (reduced testing).

Examination or test
2 units each coil voltage - Q2 of qualification inspection table
1 unsealed sample unit for internal examination.

SUPERSESSION DATA:

Supersession data: See table IV.

MIL-PRF-39016/27F

TABLE IV. Supersession data. 1/

Superseded part no. M39016/27-	New part no. M39016/27-	Superseded part no. M39016/27-	New part no. M39016/27-
001	013	007	019
002	014	008	020
003	015	009	021
004	016	010	022
005	017	011	023
006	018	012	024

1/ Dash numbers -013 through -024 are inactive for new design and are for support of existing equipment designs only.

Cross reference for Government logistical support. See table V.

TABLE V. Cross reference for Government logistical support.

Superseded part no. M39016/27-	New part number M39016/27-	Support with part number M39016/-	New part number M39016/27-	Support with part number M39016/
001	013	27-013	025	27-025
002	014	27-014	026	28-026
003	015	28-015	027	28-027
004	016	28-016	028	28-028
005	017	28-017	029	28-029
006	018	28-018	030	28-030
007	019	27-025	031	27-031
008	020	27-026	032	27-032
009	021	28-027	033	28-033
010	022	28-028	034	28-034
011	023	28-029	035	28-035
012	024	28-030	036	28-036

Referenced documents. In addition to MIL-PRF-39016, this document references the following:

- A-A-55485, /5
- MIL-PRF-39016/28, /29, /30
- MIL-STD-202
- MIL-STD-750
- MIL-STD-1285

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:

DLA - CC

Review activities:

Army - AR
Navy - AS, MC, OS, SH
Air Force - 19, 99

(Project 5945-1261)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://www.dodssp.daps.mil>.