

MIL-PRF-39035/2G
12 February 1998
SUPERSEDING
MIL-PRF-39035/2F
31 January 1994


PERFORMANCE SPECIFICATION
RESISTORS, VARIABLE, NONWIRE WOUND
(ADJUSTMENT TYPE, LEAD-SCREW ACTUATED),
NONESTABLISHED RELIABILITY, AND ESTABLISHED RELIABILITY
STYLE RJR24

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for style RJR24, nonestablished reliability, and established reliability, adjustment type, lead-screw actuated, nonwire wound, variable resistors. This style is available in characteristic C, F, and H.

1.2 Part or Identifying Number (PIN) Resistors covered by this specification must be identified by a PIN which must consist of a basis style of this specification and a coded number. The PIN must be in the following form:

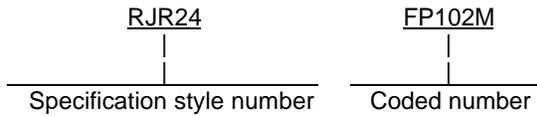

2. APPLICABLE DOCUMENTS

2.1 General The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAM, Post Office Box 3990, Columbus, OH 43216-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

2.2 Government documents

2.2.1 Specifications, standards, and handbooks The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-39035 - Resistor, Variable, Nonwire-wound (Adjustment Type), Nonestablished Reliability, and Established Reliability, General Specification for.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D, (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-39035.

3.2 Interface and physical dimension requirement Resistors shall be of the interface, and physical dimensions specified on figure 1.

3.3 Power rating The power rating shall be 1/2 watt for all characteristics.

3.4 Terminals Characteristics C, F, and H are available with L-, P-, W- and X- type terminals.

3.5 Nominal resistance value and maximum rated ac or dc working voltage Nominal resistance values and maximum rated ac or dc working voltages shall be as specified in table I.

3.6 Actual effective electrical travel Actual effective electrical travel shall be 15 turns minimum, and 30 turns maximum.

3.7 Operating torque Operating torque shall be a maximum of 5 ounces-inches.

3.8 Maximum voltage Maximum rated ac or dc working voltage shall be 300 volts.

TABLE I. Nominal resistance value and maximum rated ac or dc working voltage

Nominal resistance value	Maximum rated ac or dc working voltage per characteristics
	C, F, and H
<u>Ohms</u>	
10	2.23
20	3.1
50	5.0
100	7.0
200	10.0
500	15.8
1,000	22.3
2,000	31.6
5,000	50.0
10,000	70.7
20,000	100
25,000	111
50,000	158
<u>Megohms</u>	
0.10	223
0.20	300
0.25	300
0.50	300
1.00	300




4. VERIFICATION

4.1 Sampling and inspection Sampling and inspection shall be in accordance with MIL-PRF-39035, and as specified herein.

4.2 Dielectric withstanding voltage The magnitude of test voltage shall be 900 volts for all characteristics at atmospheric pressure, and 350 volts for all characteristics at reduced barometric pressure.

5. PACKAGING


5.1 Packaging For acquisition purposes, packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Departments System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products or by contacting the responsible packaging activity.

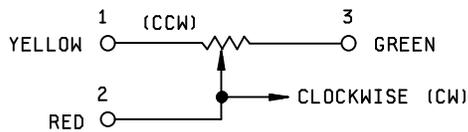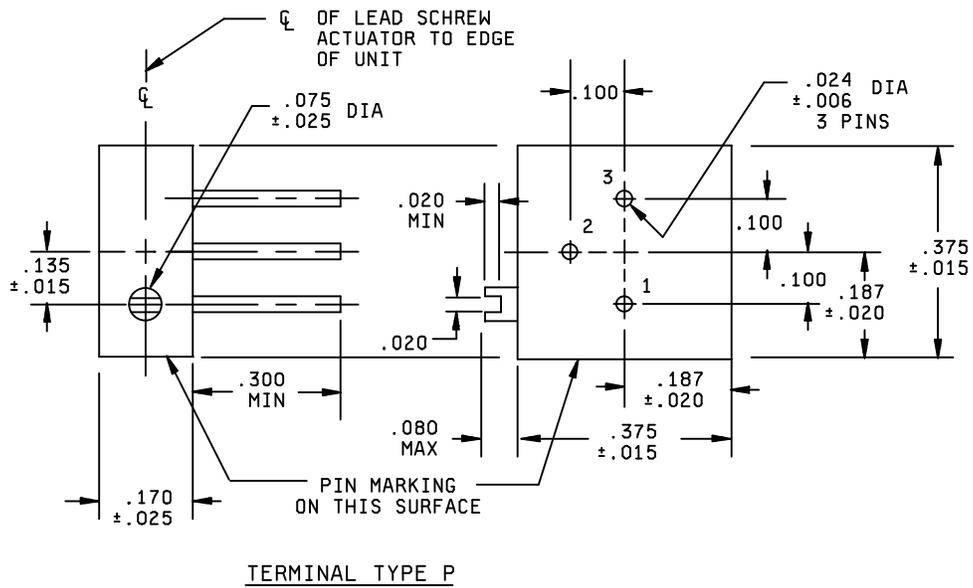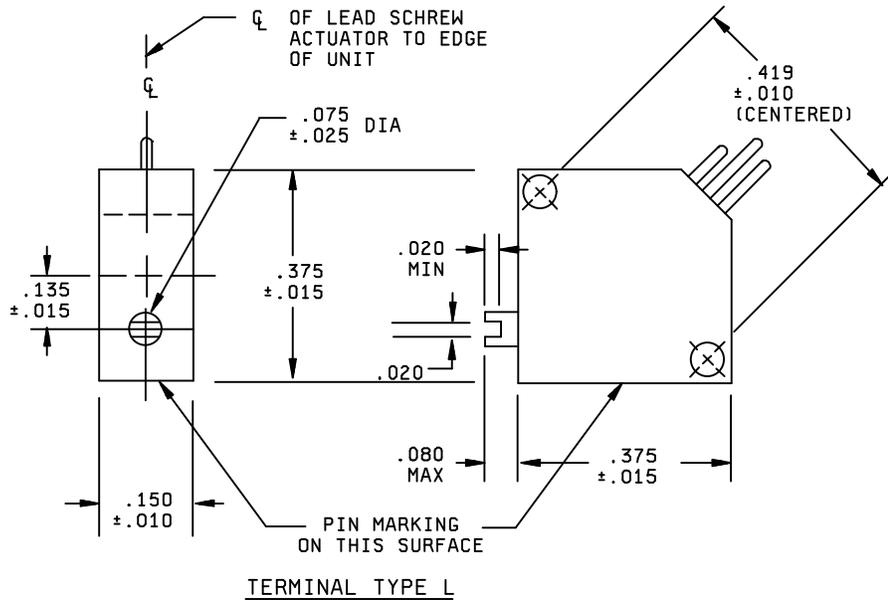

SCHMETIC DIAGRAM

FIGURE 1. Style RJR24 resistors

MIL-PRF-39035/2G

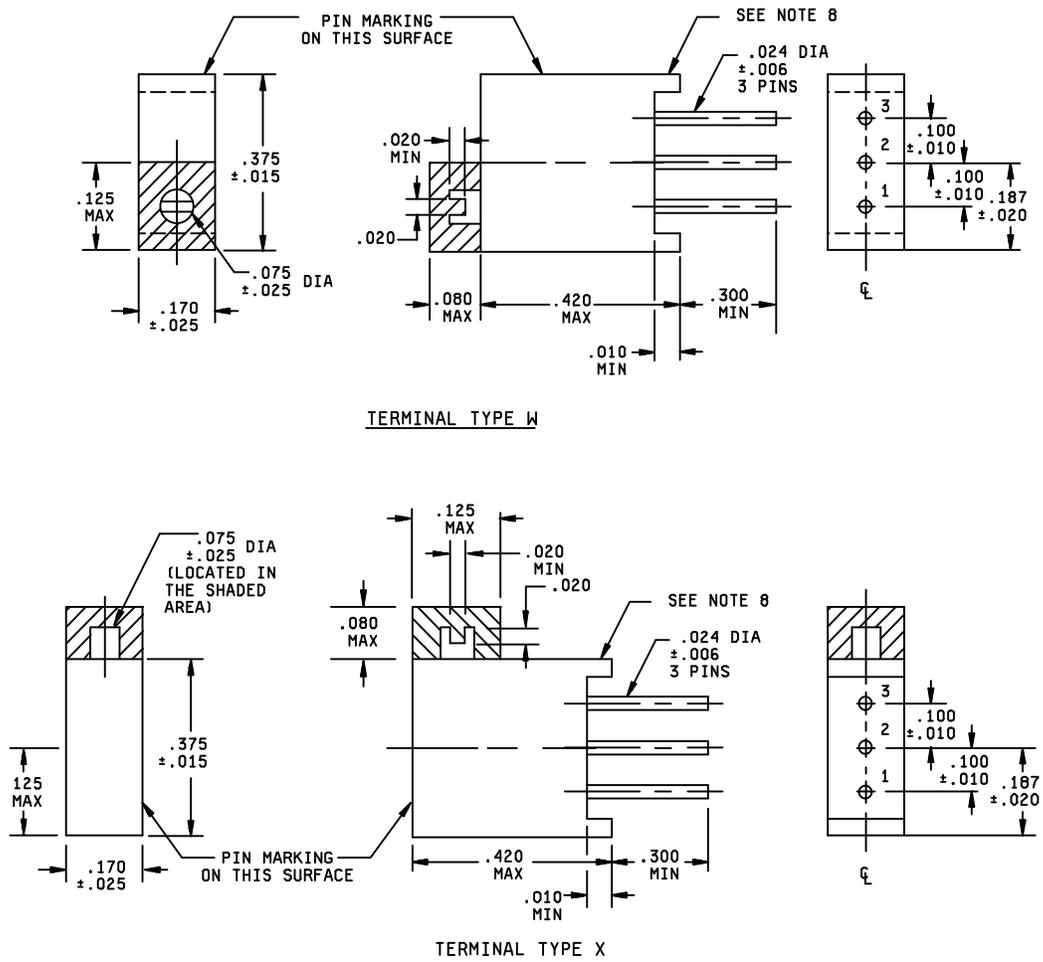

Inches	mm	Inches	mm
.006	0.15	.105	2.67
.010	0.25	.125	3.18
.015	0.38	.135	3.43
.020	0.51	.150	3.81
.024	0.61	.170	4.32
.025	0.64	.187	4.75
.030	0.76	.300	7.62
.072	1.83	.375	9.53
.075	1.91	.419	10.64
.080	2.03	.420	10.67
.100	2.54		

FIGURE 1. Style RJR24 resistors Continued.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is 005 (.13 mm).
3. Metric equivalents are given for general information only.
4. The picturization of the styles above are given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope, and do not alter the functional aspects of the device are acceptable.
5. The entire slot of the actuating screw must be above the surface of the unit.
6. For types P, W, and X normal mounting means is by use of pins only.
7. The three leads shall be insulated wire, AWG size 28 to 30, having a minimum length of 6.00 (152.4 mm); they shall be insulated with polytetrafluoroethylene, stripped .25062 (6.35 ± 1.57 mm) from the end and color coded.
8. Design of standoff is optional.
9. For terminal types P, W, and X, shorter lead lengths (.172 minimum) are available, and can be ordered though acquisition requirements (see 6.2c).

FIGURE 1. Style RJR24 resistors Continued.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use The notes specified in MIL-PRF-39035 are applicable to this specification.

6.2 Acquisition requirements Acquisition documents must specify the following:

- a. Title, number, and date of this specification.
- b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1).
- c. Terminal lead lengths requirements (shorter lead lengths can be specified in the purchase order).

6.3 Weight. The weight is .046 ounces (1.3 grams).

6.4 MIL-R-22097 substitution data Resistors of this specification regardless of their failure rate designation are substitutes for resistors of the same resistance value, tolerance, terminal characteristic and resistance temperature characteristics specified in the inactivated specifications MIL-R-22097/3 and MIL-R-22097/4.

6.5 Changes from previous issue Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Preparing activity:
DLA - CC

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - AS, MC, OS
Air Force - 17, 19, 99

(Project 5905-1473-02)