


PERFORMANCE SPECIFICATION SHEET

OSCILLATOR, CRYSTAL CONTROLLED, TYPE 1 (CRYSTAL OSCILLATOR (XO)), GATED,
250 kHz THROUGH 50 MHz, HERMETIC SEAL, SQUARE WAVE, TTL

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification and MIL-PRF-55310.

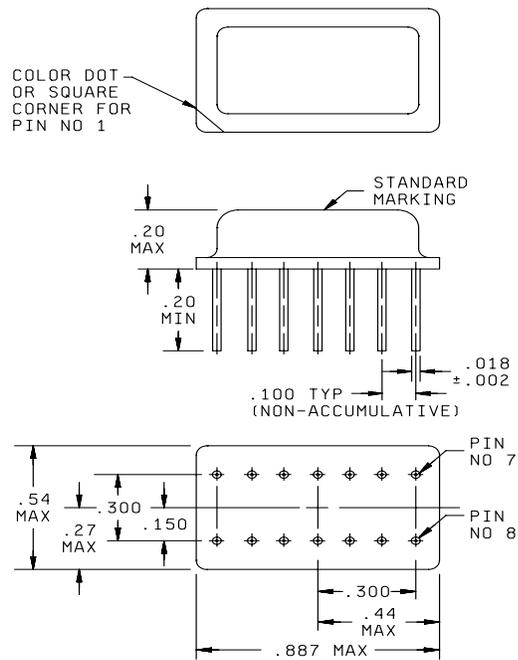

Pin number	Function
1	NC
2	NC
3	NC
4	NC
5	NC
6	NC
7	B - (GND/CASE)
8	OUTPUT
9	GATE INPUT
10	NC
11	NC
12	NC
13	NC
14	B+

Inches	mm	Inches	mm
.002	0.05	.27	6.9
.018	0.46	.300	7.62
.100	2.54	.44	11.2
.150	3.81	.54	13.7
.20	5.1	.887	22.53

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.02 (0.5 mm) for two place decimals.
4. All pins with NC function may be connected internally and are not to be used as external tie points or connections.

FIGURE 1. Dimensions and configuration.

MIL-PRF-55310/17E

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Mounting: See figure 1.

Terminals: See figure 1.

Seal: Hermetic in accordance with MIL-PRF-55310, maximum leakage rate 5×10^{-8} atm cc/s.

Weight: 0.5 ounce, maximum.

- Oscillator: Class 2 or any class 1 or class 3 oscillator meeting all class 2 requirements and verification tests specified herein and in MIL-PRF-55310.

Calibration: Manufacturer calibrated.

Screening: In accordance with MIL-PRF-55310, product level B or S, as applicable.

Temperature:

Operating: See table I.

Storage: -62°C to +125°C.

Oscillator load: Standard TTL loads (see table I).

Output waveform: Symmetrical square wave.

Output gating: Output is gated "ON" when pin 9 (gate input) is at the 1 level.

Supply voltage: 5.0 V dc ± 10 percent.

Input current: At designated supply voltage (see table I).

Output frequency: Frequency as designated at time of acquisition (see table I).

Output voltage: At designated TTL load (see table I).

Logic 1: 2.4 V dc, minimum.

Logic 0: 0.5 V dc, maximum.

Rise and fall times: See table I.

Duty cycle: See table I.

Initial accuracy at reference temperature (up to 30 days after shipment): See table I.

Initial frequency-temperature accuracy (one-half temperature cycle): Verification applicable. 1/

Frequency-temperature tolerance (one-half temperature cycle, referenced to frequency measured at +23°C ± 1 °C, immediately prior to starting of the test): See table I. Measurements taken at ten equally spaced increments over the specified operating temperature range. 1/

1/ For the purpose of transitioning this device to MIL-PRF-55310, 'Frequency stability versus temperature' has been renamed 'Frequency-temperature tolerance'. The verification requirements of 'initial frequency-temperature accuracy (one-half temperature cycle)' shall apply except that frequency measurements shall be referenced to the frequency measured at +23°C ± 1 °C (f_{ref}) instead of to the nominal frequency (f_{nom}).

MIL-PRF-55310/17E

TABLE I. Dash numbers and operating characteristics.

Dash number	Output frequency range	Input current max at 5.25 V $\pm 1\%$ <u>1/</u>	Pulse characteristics			Initial accuracy ppm at +23°C $\pm 1^\circ\text{C}$	Frequency aging ppm/year after 30 days	Frequency-temperature tolerance (ppm)		
			Rise and fall times max	Duty cycle at 1.4 V	Load max <u>2/</u>			-55°C to +125°C	-55°C to +105°C	-20°C to +70°C
								A	B	C
01	250 kHz to 5 MHz	65 mA	15 ns	<u>percent</u> 45 to 55	10 TTL	± 15 ppm	± 5 ppm	± 50 ppm	± 40 ppm	± 25 ppm
04	250 kHz to 5 MHz	65 mA	15 ns	45 to 55	10 TTL	± 25 ppm	± 10 ppm	± 100 ppm	± 40 ppm	± 25 ppm
11	4 MHz to 20 MHz	55 mA	15 ns	40 to 60	10 TTL	± 15 ppm	± 5 ppm	± 50 ppm	± 40 ppm	± 25 ppm
14	4 MHz to 20 MHz	55 mA	15 ns	40 to 60	10 TTL	± 25 ppm	± 10 ppm	± 100 ppm	± 40 ppm	± 25 ppm
21	20 MHz to 50 MHz	55 mA	5 ns	40 to 60	10 TTL	± 15 ppm	± 5 ppm	± 50 ppm	± 40 ppm	± 25 ppm
24	20 MHz to 50 MHz	55 mA	5 ns	40 to 60	10 TTL	± 25 ppm	± 10 ppm	± 100 ppm	± 40 ppm	± 25 ppm

1/ Maximum input current for no load condition. Actual configuration of TTL loads must be added to determine power supply requirements.

2/ A TTL unit load is defined as: 1.6 mA sink, 0.04 mA source, and 2 pF capacitance.

Frequency-voltage tolerance: ± 2 ppm maximum for a ± 10 percent change in supply voltage. Measurements taken at reference temperature and operating temperature range end points.

Frequency aging: Measurements shall be taken at $+70^\circ\text{C} \pm 0.2^\circ\text{C}$ at intervals of not more than every 72 hours for 30 days minimum (see table I).

± 5 ppm per year, maximum

± 0.7 ppm per 30 days.

± 1.5 ppm per 90 days

± 10 ppm per year, maximum

± 1.5 ppm per 30 days

± 3 ppm per 90 days

Terminal strength: Method 211 of MIL-STD-202, test condition C.

Applied force: 2 pounds each terminal for 10 seconds.

Bends: Five at 45 degrees each.

Frequency-environmental tolerance: Not applicable.

Vibration, sinusoidal: In accordance with MIL-PRF-55310 and method 204 of MIL-STD-202.

Nonoperating: Test condition D.

Operating: Not required.

Ambient pressure:


Nonoperating: In accordance with MIL-PRF-55310.

Operating: Method 105 of MIL-STD-202, test condition C.

MIL-PRF-55310/17E

Part or Identifying Number (PIN): Consists of "M" prefix followed by specification sheet number, a dash and coded alphas, and numeric number. See example:

EXAMPLE

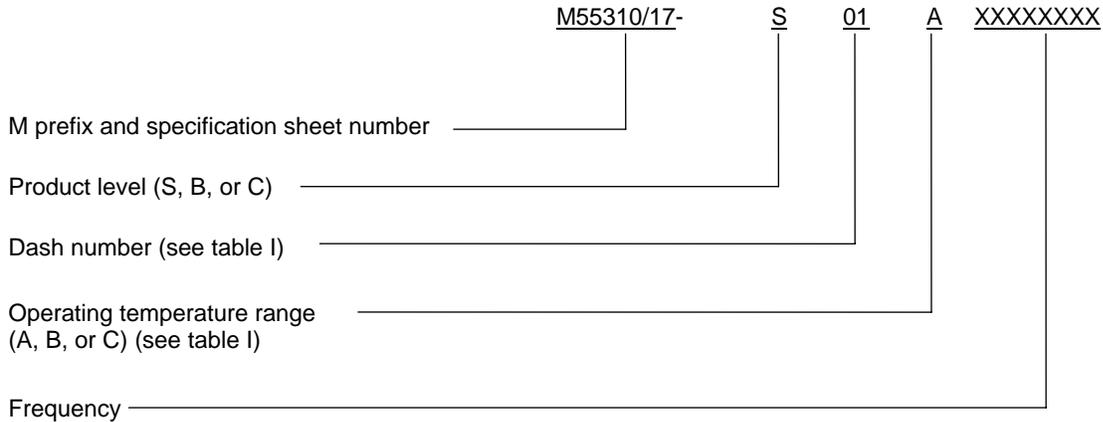

* Reference documents. In addition to MIL-PRF-55310, this document references the following:

MIL-STD-202

The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force -11
DLA - CC

Preparing activity:
Army - CR
Agent:
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 19, 99
NASA - NA

(Project 5955-0769)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.