


NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-55339/35
11 January 1977

PERFORMANCE SPECIFICATION
ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY,
(WITHIN SERIES TNC), CLASS 2, "T" PLUG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector adapter described herein shall consist of this document and the latest issue of Specification MIL-PRF-55339.

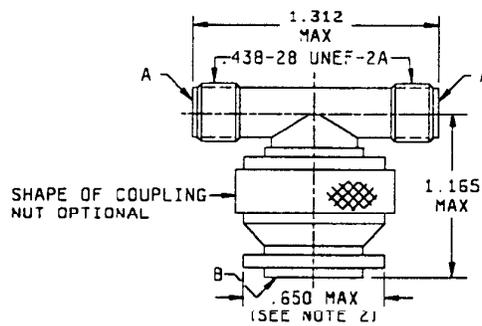

Reference	Series	Contact	Figure
A	TNC	Socket	3
B	TNC	Pin	2


INCHES	MM
.438	11.13
.650	16.51
1.165	29.59
1.312	33.32

NOTES:


1. Dimensions are in inches
2. This dimension is the largest overall diameter of the connector..
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. General configuration.

MIL-A-55339/35

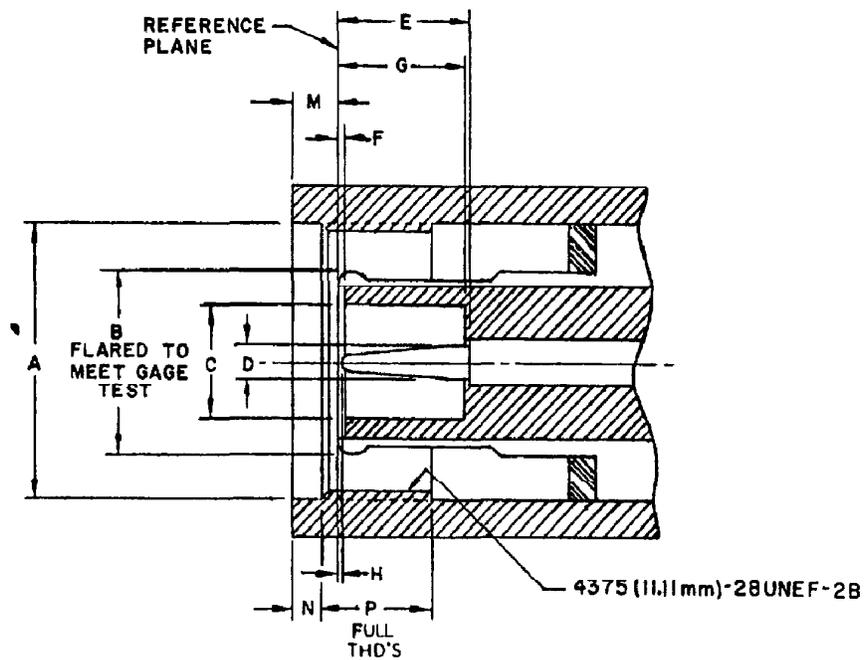


Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.440 (11.18)	
B	Gage test	
C	.190 (4.83)	
D	.052 (1.32)	.054 (1.37)
E	.210 (5.33)	.230 (5.84)
F	.006 (.15)	
G	.208 (5.28)	.228 (5.79)
H	.003 (.08)	.040 (1.02)
J	.081 (2.06)	.087 (2.21)
K	.078 (1.98)	
M		.078 (1.98)
N	.063 (1.60)	
P	.156 (3.96)	

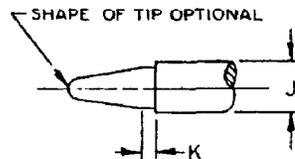


NOTES:

1. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
2. Three holes .027 (.69 mm) minimum diameter equally spaced for safety wiring Location on coupling nut optional.
3. All undimensioned pictorial configurations are for reference purposes only.

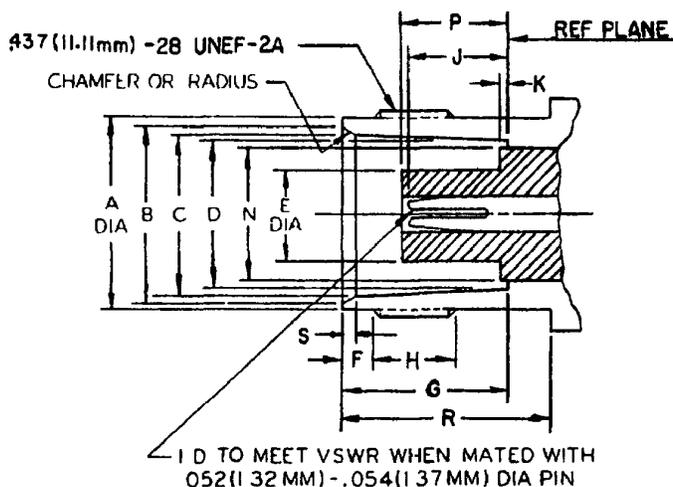

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses (see note)	
	Minimum	Maximum
A	.378 (9.60)	.381 (9.68)
B	.345 (8.76)	.356 (9.04)
C	.327 (8.31)	.333 (8.46)
D	.319 (8.10)	.321 (8.15)
E		.186 (4.72)
F	.068 (1.73)	.088 (2.24)
G	.329 (8.36)	.333 (8.46)
H	.187 (4.75)	
J	.186 (4.72)	.206 (5.23)
K		.006 (.15)
L	.195 (4.95)	
M	.081 (2.06)	.087 (2.21)
N		.256 (6.50)
P	.188 (4.78)	.208 (5.28)
R	.415 (10.56)	
S	.015 (.38)	.030 (.76)

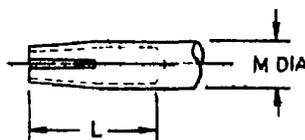

*N dimension applies to that portion (if applicable) of the dielectric which protrudes beyond the metal shoulder (or reference plane) by dimension K.

NOTES:

1. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
2. All undimensioned pictorial configurations are for reference purposes only

FIGURE 3. Mating dimensions for female terminations.

MIL-A-55339/35

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nom.

Working voltage: Sea level - 500 Vrms.
70,000 feet - 125 Vrms.

Frequency range: 0 to 11 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque is not applicable).

Dimensions: See figures 1, 2, and 3.

Center contact retention: Axial force - 6 lb, min.
Torque - 4 in. oz, min.

Force to engage and disengage: Longitudinal force - Not applicable.
Torque - 2 in. lb, max.

Mating characteristics:

Center contact (socket):

Oversize test pin dia - .057 in., min.
Insertion depth - .125 in., min.
No. of insertions - 1.

Max test pin (insertion force test):
Steel test pin dia - .054 in., min.
Pin finish - 16 microinches.
Insertion force - 2 lb, max.
No. of insertions - 1.

Min test pin (withdrawal force):
Steel test pin dia - .052 in., max.
Pin finish - 16 microinches.
Withdrawal force - 2 oz, min.
No. of withdrawals - Not applicable.

Outer contact:

Min test ring ID - .319 in., max.
Pin finish - 16 microinches.
Insertion force - 5 lb, max.
Insertion depth - .093 in., min.
No. of insertions - Not applicable.
Max test ring ID - .324 in., min.
Test ring finish - Not applicable.
Insertion depth - .031 in., max.
No. of insertions - Not applicable.

Permeability: <2.0.

Seal:

Pressurized - Not applicable.
Weatherproof - Not applicable.

Durability: 500 cycles minimum at 12 cycles/min maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding: Test voltage - 1,500 Vrms, min (sea level).

Contact resistance (milliohms, max):

<u>Contact</u>	<u>Initial</u>	<u>After</u>
Center	2.5	3.0
Outer	0.25	Not applicable

Vibration, high frequency: Interruptions - 1 μ s, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, min.

Corona level: Voltage - 375 V, min.
Altitude - 70,000 feet, min.

RF high potential withstanding voltage: RF voltage - 1,000 Vrms, min.
Frequency - 5 MHz, min.

Salt spray (corrosion): Test condition B.

Coupling torque: 15 lbs.

Coupling mechanism retention force: 100 lbs, min.

MARKING: As specified in MIL-A-55339.

Part No. M55339/35-00C01.

Custodians:

Army - EL
Navy - EC
Air Force - 85

Preparing activity:

Army - EL

Agent:

DSA - ES

Review activities:

Army - MU, MI, EL, AT
Navy - SH
Air Force - 11, 99
DSA - ES

(Project 5935-2017-11)

User activities:

Army - AT, MU
Navy - AS, MC
Air Force - 19

INSTRUCTION In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDING GENERAL
U.S. ARMY ELECTRONICS COMMAND
ATTN: DRSEL-RD-TS
FORT MONMOUTH, NEW JERSEY 07703

