



DEFENSE LOGISTICS AGENCY
DEFENSE SUPPLY CENTER, COLUMBUS
3990 EAST BROAD STREET
COLUMBUS, OH 43218-3990

IN REPLY
REFER TO

DSCC-VAT

6 July 2004

MEMORANDUM FOR MILITARY/INDUSTRY DISTRIBUTION

SUBJECT: Proposed Drafts of MS24140M, Amendment 1; MS24171G, Amendment 1; MS24178H, Amendment 2; Project Numbers 5945-1277 to 5945-1279

The initial drafts of the subject documents are now available for viewing and downloading from the DSCC-VA Web site:

<http://www.dsccols.com/Programs/MilSpec>

or

<http://www.dscc.dla.mil/Programs/MilSpec/DocSearch.asp>

The proposed drafts of the subject documents are forwarded for your review and comment. The proposed documents identify loading requirement clarifications for MS24140 and to correct errors made during the previous revisions. Vertical lines in the margins are intended to mark the location of changes.

If these documents are of interest to you, please submit your typed comments or suggestions using electronic mail or by letter. Comments may be resubmitted if it is believed that insufficient consideration has been given to previous comments. Please provide additional justification for these items. Comments or suggested changes that are not editorial in nature should include justification. Industrial activities should indicate whether they are commenting from the standpoint of a "User" or "Manufacturer." Military review activities should forward comments to their custodians in sufficient time to allow for consolidating the departmental reply. All agencies, industry, and coordinated custodian comments should be sent to this center. Comments originating from the military departments must be identified as either "Essential" or "Suggested." Essential comments, which must be accepted or withdrawn, should be supported by test data unless they obviously require no data.

Comments should be returned to this Center no later than 45 days from the date of this letter. If no response is received by the specified date, it is assumed that you concur with the documents. Any further coordination concerning these documents will be circulated only to firms and organizations that furnish comments or reply that they have an interest.

If there are any questions, please contact Mr. Jim Crum, by electronic mail at James.Crum@dla.mil (preferred method of notification); by telephone at commercial 614-692-0542, DSN 850-0542; by facsimile 614-692-6939; or by mail at Defense Supply Center Columbus, Electronic Components Team, DSCC-VAT, P.O. Box 3990, Columbus, OH 43218-3990.

Signature on File

KENDALL A. COTTONGIM
Chief
Electronic Components Team

3 Attachments



NOTE: This draft, dated 6 July, 2004 prepared by DLA-CC has not been approved and is subject to modification. DO NOT USE FOR ACQUISITION PURPOSES. (Project 5945-1279)

INCH-POUND

MS24140M
w/AMENDMENT 1
SUPERSEDING
MS24140M
15 April 2003

DETAIL SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 50 AMPERES, 1 PST (N.O.),
TYPE I, HERMETICALLY SEALED

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall
consist of this specification and the latest issue of MIL-PRF-6106.


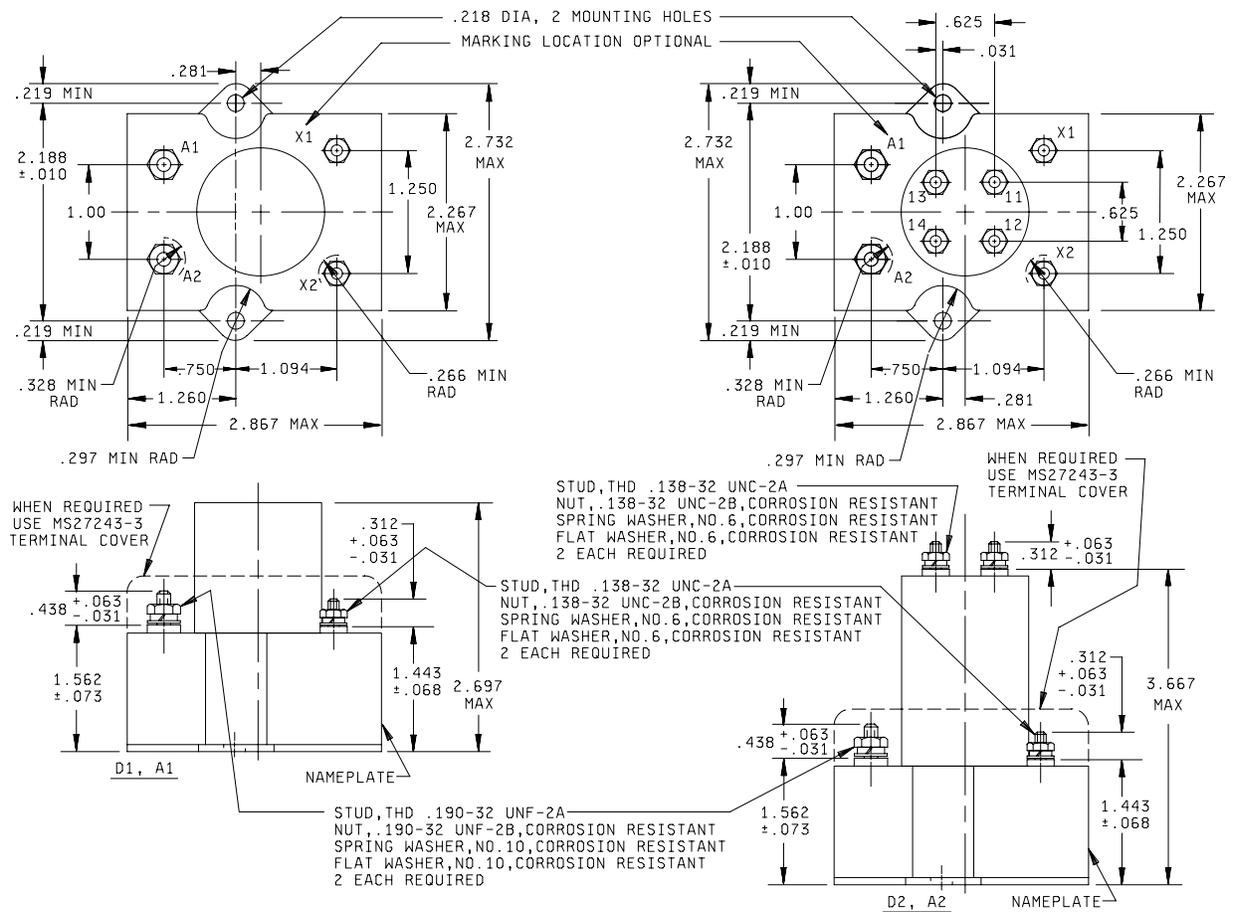


FIGURE 1. Dimensions and configurations.

MS24140M
w/AMENDMENT 1

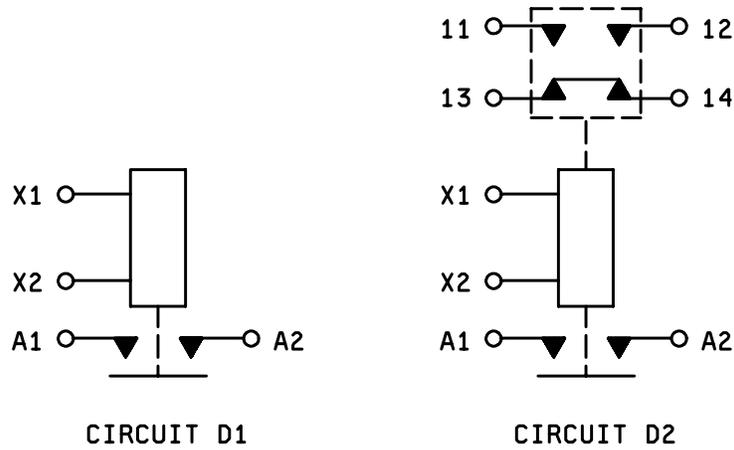

CIRCUIT D1		CIRCUIT D2	
Inches	mm	Inches	mm
.010	0.25	.625	15.86
.031	0.79	.750	19.05
.063	1.60	1.000	25.40
.068	1.73	1.094	27.79
.073	1.85	1.250	31.75
.138	3.51	1.260	32.00
.190	4.83	1.443	36.65
.218	5.54	1.562	39.67
.219	6.96	1.572	39.93
.240	6.10	2.188	55.58
.266	6.76	2.267	57.68
.281	7.14	2.697	68.50
.297	7.54	2.732	69.39
.312	7.92	2.867	72.82
.328	8.33	3.667	93.14
.438	11.13		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .031$.
4. This specification sheet takes precedence over documents referenced herein.
5. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.
6. Coil and auxiliary terminals may use additional flat washer for terminal seat.
7. Cadmium or cadmium compounds are prohibited on external hardware. A transition period to non-cadmium hardware is authorized for up to 1 year from the date of this revision.
8. Spring washer on drawing is a spring lock washer.

FIGURE 1. Dimensions and configurations - Continued.

MS24140M
w/AMENDMENT 1

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Dash numbers and general characteristics: See table I.

Contact data:

Load ratings: See table II.

Maximum contact drop:

Initial: 0.150 volt.

After life test: 0.175 volt.

Overload current (NO): 400 amperes.

Rupture current (NO): 500 amperes.

Coil data: See table III.

Duty rating: Continuous.

RFI specification: MIL-STD-461 (applicable to coil circuits of ac-operated relays).

Electrical data:

Minimum insulation resistance:

Initial: 100 megohms.

After life or environmental test: 50 megohms.

Dielectric strength (sea level): 2-5 seconds (see table IV).

Dielectric strength (altitude): 1 minute (see table V).

Environmental characteristics:

Temperature range: -70°C to +125°C.

Maximum altitude rating: 80,000 feet.

Shock G-level: 25 g's.

Duration: 6-9 ms.

Maximum duration contact opening; 2 ms.

Vibration (sinusoidal): See table VI.

Acceleration: 15 g's.

Qualification by similarity: See MIL-PRF-6106.

Part or Identifying Number (PIN): MS24140 - (plus dash number from table I).

MS24140M
w/AMENDMENT 1

TABLE I. Dash numbers and general characteristics. ^{1/}

PIN MS24140-	Type	Coil	Terminal type	Mounting or mating socket	Auxiliary contacts	Maximum weight in pounds ^{2/}
D1 D2	I	dc	Stud	Flange	None Yes	.95 1.10

^{1/} Dash numbers A1 and A2 have been cancelled without replacement.

^{2/} Weights include covers and barriers.

TABLE II. Rated contact load (amperes per pole) case grounded.

Type of load	Life operating cycles x 10 ³	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase ^{1/}			
		Main		Aux		Main		Aux		Main		Aux	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
Resistive	50	50		5	5	50		5					
Inductive	10	50		5	5	50		5					
Motor	50	50				50							
Lamp	30 ^{4/}	25 ^{4/}		.75	.75	10 ^{2/}		.75					
Transfer load ^{3/}													
Mechanical life reduced current	100	12.5		1.25	1.25	1.25		1.25					
Mixed loads	50	5		Per	spec	5							

^{1/} Absence of value indicates relay is not rated for 3 phase application.

^{2/} Test requirement: 100 amperes AC inrush current with 2 seconds off-time.

^{3/} Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at rating indicated.

^{4/} MS24140-D1 is rated for 50,000 cycles at 100 amperes DC inrush current and 10 amperes DC current steady state.

TABLE III. Operating characteristics.

PIN MS 24140-	Coil data										Time - milliseconds max						
	Coil	Rated			Max		Max pick-up voltage			Hold vol- tage ^{2/}	Drop out vol- tage ^{2/}	Oper- ate ^{3/}	Rel- ease ^{4/}	Bounce			
		Volts ^{1/}	Freq Hz	Ω Res +15% -10	Volts	Amp	Nor- mal ^{2/}	High temp test	Cont cur- rent test					Main		Aux	
														NO	NC	NO	NC
D1	X1,X2	28	dc	78	29	.50	18	21	22.5	7	1.5	20	10	2	---	---	---
D2	X1,X2	28	dc	78	29	.50	18	21	22.5	7	1.5	20	10	2	---	4	4

^{1/} CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.

^{2/} Over the temperature range.

^{3/} With rated coil voltage.

^{4/} From rated coil voltage.

MS24140M
w/AMENDMENT 1

TABLE IV. Dielectric strength (sea level).

	Initial		After life tests	
	28 V dc	115 V ac	28 V dc	115 V ac
Coil to case	1,250 V rms	1,500	1,000 V rms	1,125
Aux contacts	1,250 V rms	1,500	1,000 V rms	1,125
All other points	1,250 V rms	1,500	1,000 V rms	1,125

TABLE V. Dielectric strength (altitude).

	28 V dc	115 V ac
Coil to case	500 V rms	500
Aux contacts	500 V rms	500
All other points	500 V rms	500

TABLE VI. Vibration levels (sinusoidal).

PIN MS24140-	5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1,500 Hz
D1	.08 DA	.06 DA	10 g's	10 g's	4 g's
D2	.08 DA	.06 DA	10 g's	6 g's	4 g's

Referenced documents. In addition to MIL-PRF-6106, this document references the following:

MIL-STD-461

The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1279)

Review activities:
Navy - EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at www.dodssp.daps.mil.