

NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-6106/31(USAF)
30 December 1977

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, RELAY EXTRACTION TOOL

This specification sheet is approved for use by the Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for procuring the relay extraction tool described herein shall consist of this document and the latest issue of Specification MIL-PRF-6106.

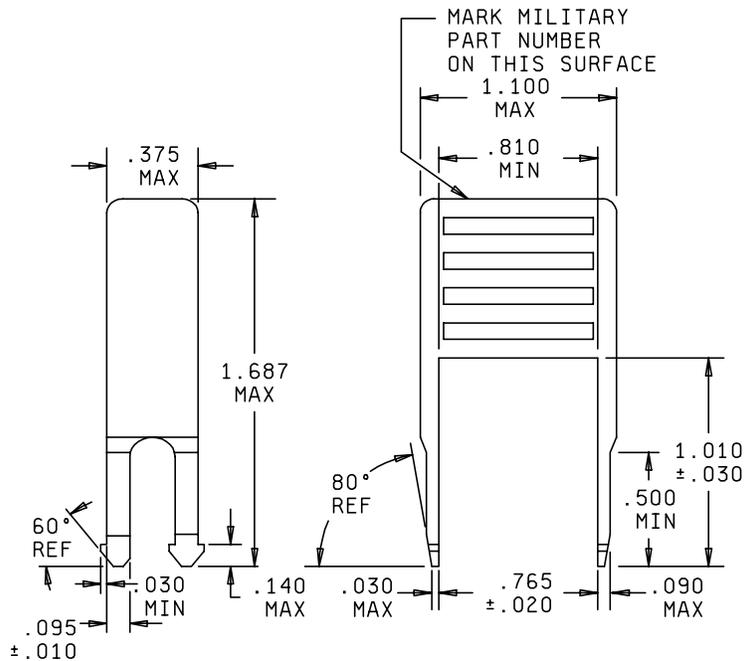

Inches	mm	Inches	mm
.010	0.25	.500	12.70
.020	0.51	.765	19.43
.030	0.76	.810	20.57
.090	2.29	1.010	25.65
.095	2.41	1.100	27.94
.140	3.56	1.687	42.85
.375	9.52		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Outline drawing, relay extraction tool.

MIL-R-6106/31(USAF)

REQUIREMENTS:

Material: Acetal thermoplastic.

Relay extraction tool shall be used to remove relays from relay bracket mount,
MIL-R-6106/25.

Part number: M6106/31-001.

Custodian:
Air Force - 85

Preparing activity:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

(Project 5945-F381-3)

★U.S. GOVERNMENT PRINTING OFFICE: 1977 - 703-122/366