


PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT,
LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE, HERMETICALLY SEALED,
ALL WELDED, TRANSIENT SUPPRESSED DC COIL


This amendment forms a part of MIL-PRF-83536/16B, dated 12 October 2000, and is approved for use by all Departments and Agencies of the Department of Defense.

FIGURE 1, circuit diagrams: Delete and substitute:

"

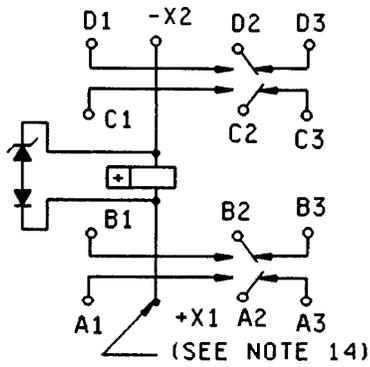

CIRCUIT DIAGRAM (NO MOUNT, RVFM, AND HFM)

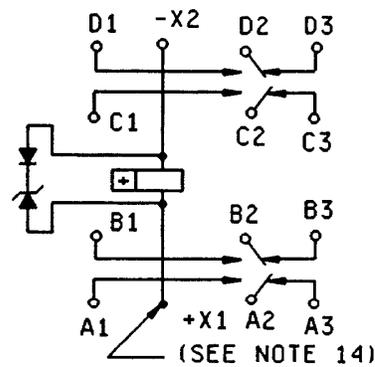

CIRCUIT DIAGRAM (OPTIONAL INTERNAL DIODE CONFIGURATION)

"

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1125-01)

Review activities:
Air Force - 99