

This is an advance copy of the dated document.  
 The final document from Defense Printing Service  
 may be slightly different in format due to electronic  
 conversion process. Actual technical content will  
 be the same.

INCH-POUND

MIL-PRF-8805/114B

3 September 1999

SUPERSEDING

MIL-S-8805/114A

8 May 1986

PERFORMANCE SPECIFICATION SHEET

SWITCH ASSEMBLY, SENSITIVE, ROLLER PLUNGER,  
 SPDT, 7 AMPERES, WATERTIGHT SEAL

This specification is approved for use by all Departments  
 and Agencies of the Department of Defense.

The requirements for acquiring the product described herein  
 shall consist of this specification and MIL-PRF-8805



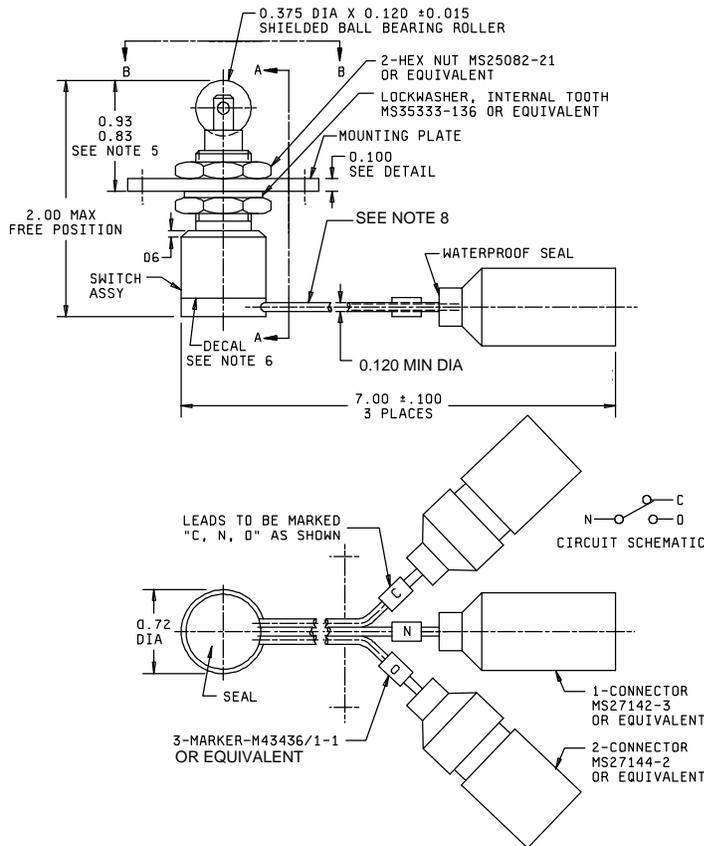


FIGURE 1. Dimensions and configuration.

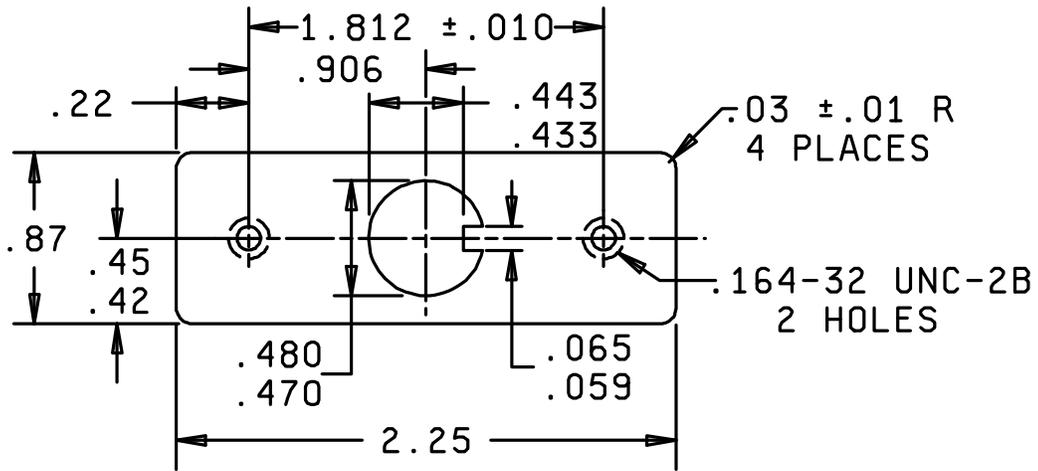

VIEW B-B

DETAIL OF MOUNTING PLATE, 0.100 THICK

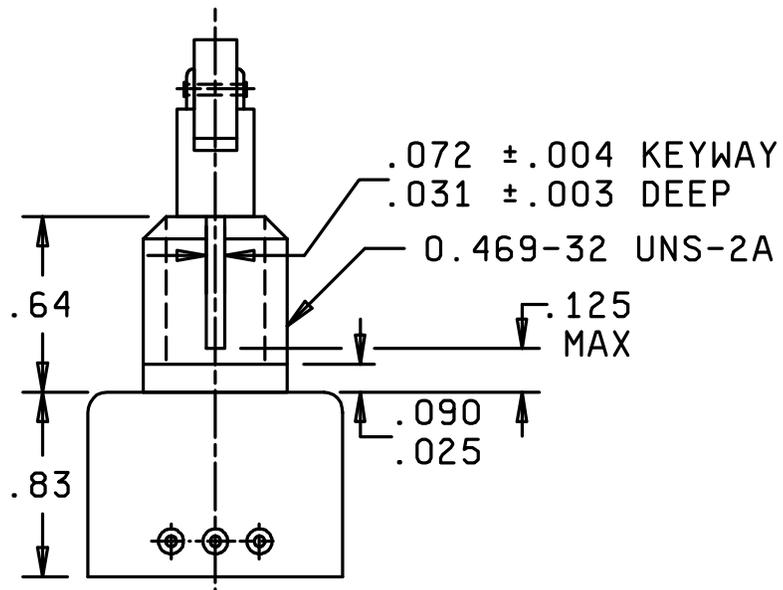

VIEW A-A

LESS MOUNTING HARDWARE AND DECAL

FIGURE 1. Dimensions and configuration - Continued.

MIL-PRF-8805/114B

Inches	mm	Inches	mm
0.003	0.08	0.375	9.53
0.004	0.10	0.42	10.67
0.005	0.13	0.433	11.00
0.010	0.25	0.443	11.25
0.015	0.38	0.45	11.43
0.025	0.64	0.469	11.91
0.03	0.76	0.470	11.94
0.031	0.79	0.480	12.19
0.059	1.50	0.56	14.22
0.06	1.52	0.64	16.26
0.065	1.65	0.72	18.29
0.072	1.83	0.83	21.08
0.090	2.29	0.87	22.10
0.100	2.54	0.93	23.62
0.120	3.05	0.906	23.01
0.125	3.18	1.00	25.40
0.164	4.17	1.56	39.62
0.22	5.59	1.812	46.02
0.26	6.60	2.00	50.80
0.36	9.14	2.25	57.15
		7.00	177.80

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance (in inches) is 0.03 for 2 place decimals and 0.005 for 3 place decimals.
4. Exact shape of switch optional within envelope dimensions shown.
5. Mounting plate shall be positioned between indicated dimensions.
6. Decal: Pressure sensitive, aggressive tack type, using permanent adhesive.
7. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for hardware material.
8. Lead wire shall be 20 gauge, flame and abrasion, insulated black and shall be capable meeting the environmental and system requirements of the intended application.

FIGURE 2. Dimensions and configuration - Continued.

MIL-PRF-8805/114B

REQUIREMENTS:

Dimensions and configuration: See figures 1.

Enclosure design: 3.

Temperature characteristic: 1.

Shock type: M.

Sinusoidal vibration grade: 2.

Military part number: M8805/114-01.

Finish: All exposed parts shall be corrosion resistant or shall be treated for corrosion resistance.

Mounting hardware: Mounting plate shall be positioned as shown on figure 1.

Weight (with leads): 0.20 pound maximum.

Operating characteristics:

Actuating force:  $9 \pm 3$  pounds.

Releasing force: 4 pounds minimum.

Pretravel: 0.040 inch maximum.

Overtravel: 0.125 inch minimum.

Overtravel force: 30 pounds maximum.

Movement differential: 0.020 inch minimum.

Strength of actuating means: 30 pounds.

Salt spray: Connectors shall be coupled during the test and examined for corrosion following the test.

Sand and dust: Connectors shall be coupled during the test. Following the test, there shall be no evidence of dust inside the connectors.

Mechanical endurance: 25,000 cycles.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

MIL-PRF-8805/114B

TABLE I. Electrical ratings.

Load	Sea level 28 V dc (amperes)
Resistive	7
Inductive	4
Motor	4

Marking: Black printing 0.06 inch high on white background (decal).

Terminal identification: Include circuit schematic diagram.

Qualification inspection: Table II applies only if qualified MIL-PRF-8805/4 basic sensitive switches are utilized, and similar products have been qualified to MIL-PRF-8805/43 or MIL-PRF-8805/104.

TABLE II. Qualification inspection.

Number of sample units	Tests of MIL-PRF-8805 qualification inspection table
6	Group I
2	Group III
4 <u>1/</u>	Group VII

1/ Electrical endurance: Only resistive and inductive loads need to be tested

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:  
Army - AT  
DLA - CC

Preparing activity:  
DLA - CC

(Project 5930-A781)