FED. SUP CLASS
5990

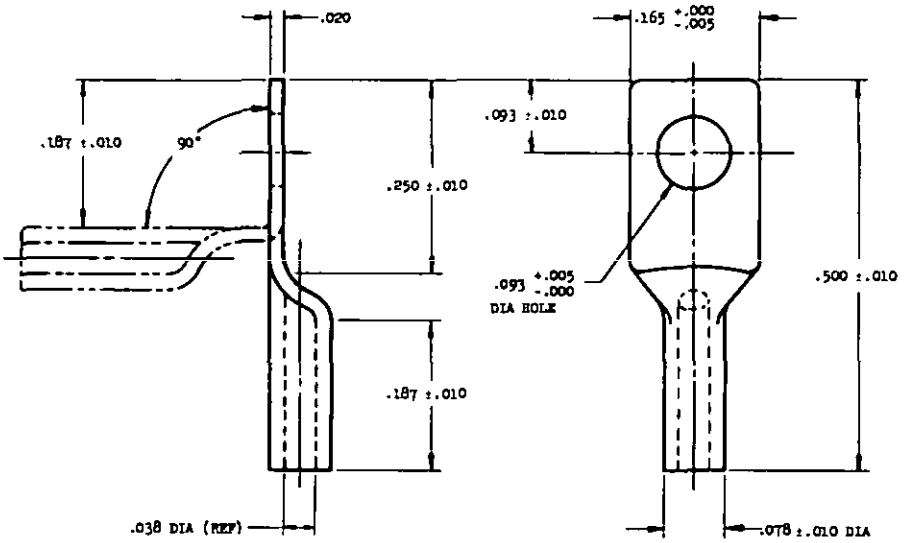

NOTES:

1. MATERIAL: COPPER, QQ-C-576, 1/2 HARD.
2. FINISH: TIN PLATE TO THICKNESS OF .0005 IN ACCORDANCE WITH MIL-T-10727.
3. MECHANICAL REQUIREMENTS: TERMINAL LUG MUST BE SUITABLY CRIMPED BY THE CRIMPING TOOLS INDICATED ON MS25037.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES .003 R TO .010 R.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°. INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH MIL-STD-8.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 6 JUNE 1967 REVISED

P.A. NAVY- AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE LUG, TERMINAL TYPE I, CLASS 2	MILITARY STANDARD MS90404
PROCUREMENT SPECIFICATION MIL-T-7928	SUPERSEDES: BUORD 967735	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. W69 1 PLATE NO. 15320

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST:
ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST:
ARMY - MU, EL, MI
NAVY - AS, SH
AF - 11, 85

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.