


FEDERAL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, SPECIFIC PURPOSE, LOCKING, GROUNDING,
3 POLE, 4 WIRE, 30 AMPERES, 120 VOLTS, 400 HERTZ, 3 PHASE Δ

This specification was approved by the Commissioner, Federal Supply Service,
General Services Administration, for the use of all Federal agencies.

The requirements for acquiring the connector described herein shall
consist of this specification and the latest issue of W-C-596.

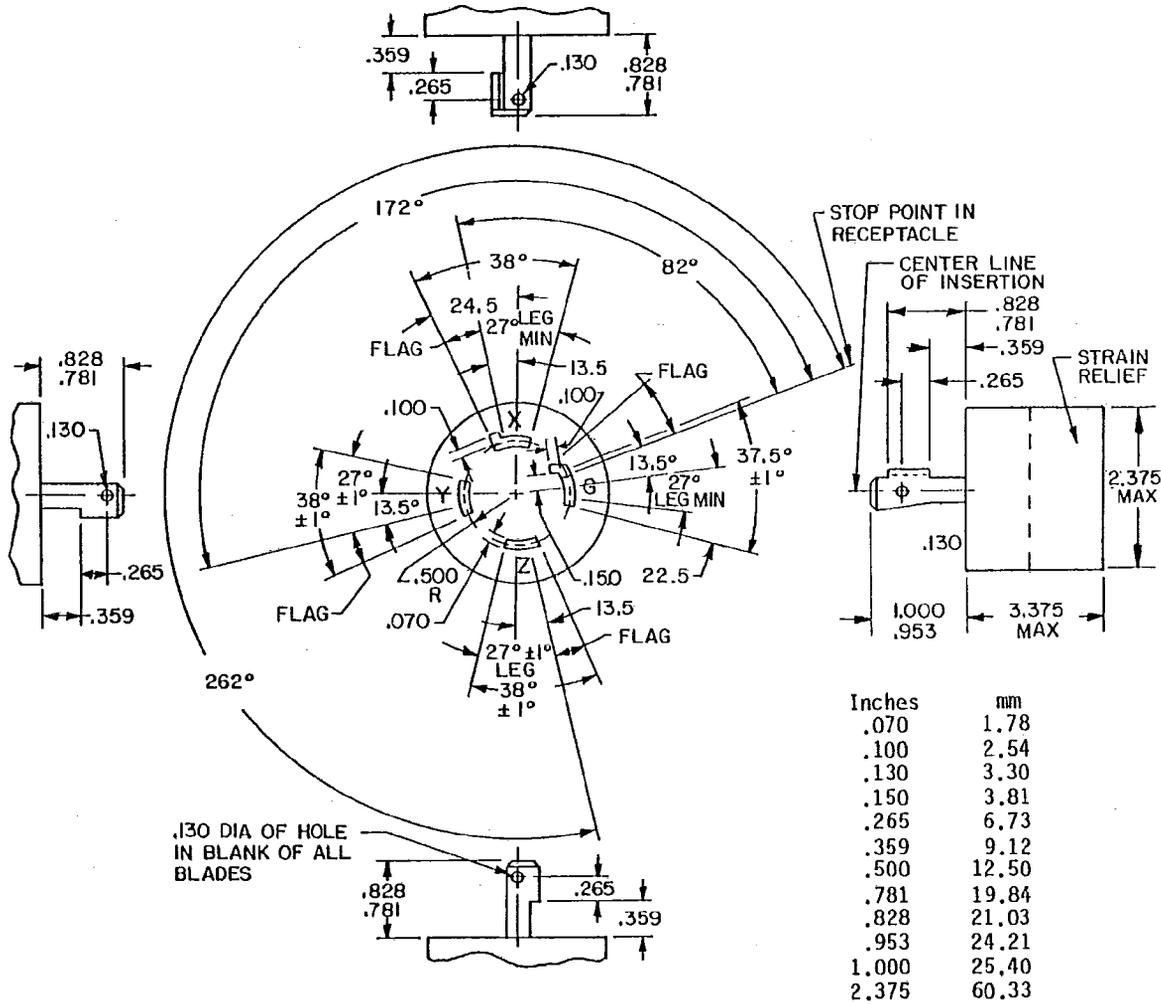

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 0.005 (.13 mm) on all decimals and $\pm 5^\circ$ on angles.

FIGURE 1. Connector design and configuration.

(A) denotes changes

REQUIREMENTS:

Design and configuration: See figure 1.

Mating face: Dead-front construction.

Armored construction: Not acceptable.

Ratings:

Voltage: 120 volts, 3 phase Δ.

Current: 30 amperes.

Frequency: 400 hertz.

Ⓐ Vibration: Method 204 of MIL-STD-202, test condition B (WC596/155-2 only).

Ⓐ Shock: Method 213 of MIL-STD-202, test condition I (WC596/155-2 only).

Mating connector: W-C-596/154 or W-C-596/156.

Part number: WC596/155-1, WC596/155-2 (ruggedized).

CONCLUDING MATERIAL

Custodians:

Army - CR

Navy - YD

Air Force - 85

Review activities:

Army - MI

Navy - EC, AS

Air Force - 11, 99

User activities:

Army - ME, AV

Navy - MC, SH

Preparing activity:

DLA - ES

Civil agency coordinating activities:

DCGOVT - DCG

DOT - ACO

GSA - FSS, PCD

HEW - FEC

Interior - BPA

USDA - BPA

(Project 5935-3660-08)

U.S. GOVERNMENT PRINTING OFFICE : 1988 - 201-766/81198

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of the general specification to obtain extra copies and other documents referenced herein.