

INCH-POUND


W-F-1814/65B
12 January 2004
SUPERSEDING
W-F-1814/65A
February 20, 1987

FEDERAL SPECIFICATION SHEET

FUSE, CARTRIDGE, HIGH INTERRUPTING CAPACITY, CLASSES RK1 AND RK5
(CURRENT-LIMITING) 600 VOLTS, 101-200 AMPERES

The General Services Administration has authorized the use of this federal specification sheet by all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the latest issue of Specification W-F-1814.

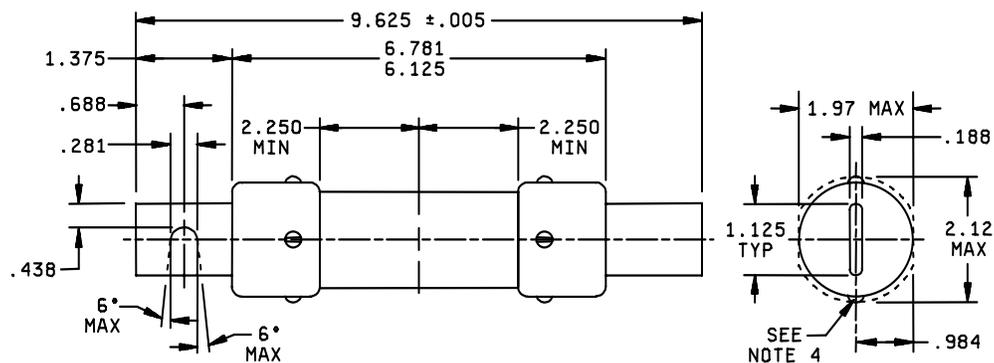

Inches	mm
.005	0.13
.188	4.78
.281	7.14
.438	11.13
.688	17.48
.984	24.99
1.125	28.58
1.375	34.93
1.97	50.04
2.12	53.85
2.250	57.15
6.125	155.58
6.781	172.24
9.625	244.48

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Solid line indicates location, shape, and dimensions for minimum rejection groove.
4. Dashed line indicates location, shape, and dimensions for maximum rejection groove.
5. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two-place decimals and ± 0.005 (0.13 mm) for three-place decimals.

FIGURE 1. Classes RK1 and RK5 fuses, 600 volts, 101-200 amperes.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Physical - Nonrenewable.

Terminals - Knife blade type.

Material - Copper, or copper alloy.

Strength - 5 inch-pound torque between body and blades.

Body:

Insulating material - Fiber, ceramic, melamine-impregnated glass fiber, or other suitable material.

Electrical:

Voltage - 600 volts or less.

Frequency - 48 to 60 hertz.

Current - See table I.

Current carrying capacity - 110 percent of rated current indefinitely with temperature rise not to exceed 50°C (90°F) above ambient on the body and 60°C (108°F) on the blades.

Overload interrupt:

Instantaneous - Shall interrupt within 2 hours at 135 percent of rated current and within 8 minutes at 200 percent of rated current.

Time delay - In addition to the above requirement, the fuse shall not interrupt 500 percent of rated current within 10 seconds.

Interrupting capacity rating - 200,000 amperes rms symmetrical at 600 volts, 48 to 60 Hz and a power factor of 20 percent or less. Closing angle shall be essentially at the zero of the voltage wave (maximum offset) or later, to produce start of arcing within 30 electrical degrees prior to system peak voltage.

Threshold ratio - 30 maximum for RK1; 65 maximum for RK5.

Peak let-thru current: See table II.

Maximum clearing I^2T : See table II.

Applicable fuseholder: Class R for blade type fuses in accordance with UL 512.

W-F-1814/65B

Government part number: The Government part number shall consist of the prefix "WF1814/65-" followed by the part number designation shown in table I.

TABLE I. Current rating and part number designation.

Current in amperes	Part number designation			
	RK5		RK1	
	Instantaneous	Time delay	Instantaneous	Time delay
110	F5110	D5110	F1110	D1110
125	F5125	D5125	F1125	D1125
150	F5150	D5150	F1150	D1150
175	F5175	D5175	F1175	D1175
200	F5200	D5200	F1200	D1200

TABLE II. Peak let-thru and I²T current.

	Between threshold and 50 kA		100 kA		200 kA	
	RK1	RK5	RK1	RK5	RK1	RK5
Maximum acceptable peak let-thru current (I _p x 10 ³)	18	32	22	40	30	50
Maximum clearing I ² T (amperes squared seconds) (I ² T x 10 ³)	400	1600	400	1600	400	2000

MILITARY INTEREST:

Custodians:

Army - CR
Navy - YD
Air Force - 11
DLA - CC

Review Activities:

Army - AR, AT, CR4
Navy - OS
Air Force - 99
NSA - NS

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - 7FXE
NASA - NA

Preparing Activity:
DLA - CC

(Project 5920-0815)