


1. SCOPE

1.1 Scope. This drawing describes the requirements for a family of zero insertion force (ZIF) card guides intended for use with printed circuit boards and circuit card assemblies in high shock and vibration environments.

1.2 Part or Identifying Number (PIN). The complete PIN shall be as follows:

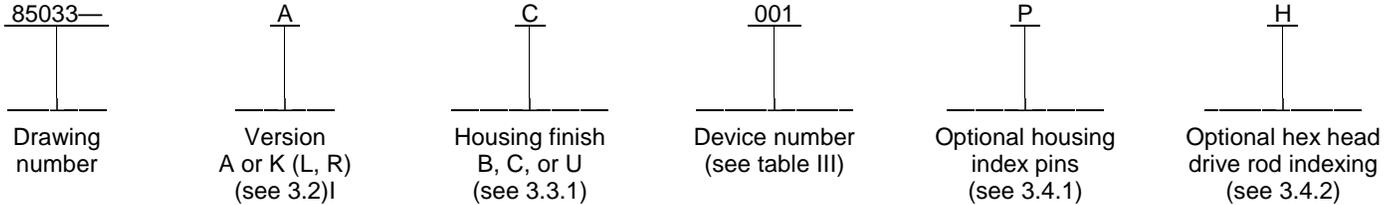

NOTE: Select ZIF electrical card holder options from the above appropriate paragraphs as in the following example:

Example: 85033-AB211PH (DSCC drawing ZIF electrical card holder with the following options; assembly, black anodize, housing number 14, E type rod assembly, .062 inch (1.5748 mm) board thickness, right handed, optional housing indexing pins, and has the optional yellow hex head.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-56032 - Ink, Marking, Epoxy Base.

DEPARTMENT OF DEFENSE

MIL-C-5541 - Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
 MIL-A-8625 - Anodic Coatings for Aluminum and Aluminum Alloys.
 MIL-F-14072 - Finishes for Ground Based Electronic Equipment.
 MIL-C-26074 - Coating, Electroless Nickel, Requirements for.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-1285 - Marking of Electrical and Electronic Parts.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Document Automation and Production Service, Building 4D (DAPS-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 2

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

- SAE-AMS-QQ-A-200 – Aluminum Alloy, Bar, Rod, Shapes, Structural Shapes, Tube, and Wire, Extruded; General Specification for.
- SAE-AMS-QQ-S-763 – Steel Bars, Wire, Shapes, and Forgings; Corrosion Resistant.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- ASTM B194 – Standard Specification for Copper-Beryllium Alloy Plate, Sheet, Strip, and Rolled Bar.

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Interface and physical dimensions. See figures 1 through 6 and tables I, II and III.

3.1.1 Housing. See figure 1, tables I and II.

3.1.2 Rod assembly types. See figures 2, 3, 4, and 5 and table III. The rod assembly types are as follows:

- Type A (see figure 2) = Pin drive with aluminum rod (6.0 inch (152.4 mm) maximum length).
- Type B (see figure 2) = Pin drive with steel rod.
- Type C (see figure 3) = Slotted (screwdriver) drive with steel rod (4.5 inch (114.3 mm) maximum length).
- Type D (see figure 4) = 1/4 Hex head drive with aluminum rod.
- Type E (see figure 5) = 3/16 hex head drive with aluminum rod, with unpainted indexing (6.0 inch maximum length).
- Type F (see figure 5) = 3/16 hex head drive with steel rod, with unpainted indexing.

3.1.3 Spring. The spring lengths shall be specified in table I.

3.1.3.1 Spring tolerance. Tolerance on spring length shall be +.010 inch (0.254 mm) and -.030 inch (0.762 mm).

3.1.4 Design and dimensions of assembled parts. See table III.

3.1.5 Version. Card holders are available in either assembled or unassembled (kit) version. A kit consists of a housing, a rod assembly, and a spring. Use an "A" in the PIN for assembled card holder, or a "K" for a kit when ordering card holder with rod types A, B, C, E, and F. When selecting for the kit version with the rod type D, right (R) or left (L) hand need to be selected, see device number and dimension detail in table III.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 3

TABLE I. Housing details.

Housing number	A	B	C	D	Mounting holes					Spring length	Number of mounting holes
					E	F	G	H	J		
03	1.5	.75		.50	1.25					1.5	2
04	2.0	1.00		1.00	1.75						
05	2.5	1.25		1.50	2.25						
06	3.0	.75	1.5	2.00	1.50	2.75				3.0	3
07	3.5	1.00	1.5	2.50	1.75	3.25					
08	4.0	1.25	1.5	3.00	2.00	3.75					
09	4.5	.75	3.0	3.50	2.25	4.25				4.5	4
10	5.0	1.00	3.0	4.00	1.75	3.25	4.75				
11	5.5	1.25	3.0	4.50	2.00	3.50	5.25				
12	6.0	.75	4.5	5.00	2.00	4.00	5.75			6.0	4
13	6.5	1.00	4.5	5.50	2.25	4.25	5.25				
14	7.0	1.25	4.5	6.00	2.50	4.50	6.75				
15	7.5	2.25	3.0	6.50	2.00	3.75	5.50	7.25		7.5	5
16	8.0	2.50	3.0	7.00	2.00	4.00	6.00	7.75			
17	8.5	2.75	3.0	7.50	2.25	4.25	6.25	8.25			
18	9.0	3.75	1.5	8.00	2.50	4.50	6.50	8.75		9.0	6
19	9.5	4.00	1.5	8.50	2.00	3.75	5.75	7.50	9.25		
20	10.0	4.25	1.5	9.00	2.00	4.00	6.00	8.00	9.75		
21	10.5	5.25		9.50	2.25	4.25	6.25	8.25	10.25	10.5	

3.2 Material.

3.2.1 Housing. Aluminum alloy 6063-T6 extrusion in accordance with SAE-AMS-QQ-A-200.

3.2.2 Housing index pins. Aluminum alloy 6061-T6 extrusion in accordance with SAE-AMS-QQ-A-200.

3.2.3 Rod and rod assembly associated parts.

3.2.3.1 Aluminum (types A, D, and E). Aluminum alloy 7075-T6 extrusion in accordance with SAE-AMS-QQ-A-200.

3.2.3.1.1 Pin drive (types A and B). Stainless steel alloy in accordance with SAE-AMS-QQ-S-763.

3.2.3.2 Stainless steel (types B, C, and F). Stainless steel alloy type 304 in accordance with SAE-AMS-QQ-S-763.

3.2.3.2.1 Hex head drive. Aluminum alloy 6061-T6 extrusion in accordance with SAE-AMS-QQ-A-200.

3.2.3.3 Anti-rotational pin (type D only). Stainless steel alloy in accordance with SAE-AMS-QQ-S-763.

3.2.4 Spring. Beryllium copper alloy 172 in accordance with ASTM B194.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 4

3.3 Finish.

3.3.1 Housing. Black anodize in accordance with MIL-A-8625, type II (B in PIN); chemical film (irridite) in accordance with MIL-C-5541 (use C in PIN); or no finish (U in PIN).

3.3.2 Rod. For aluminum type, the finish shall be black anodize in accordance with MIL-A-8625, type II. For steel type, the finish shall be passivated in accordance with MIL-F-14072, E300.

3.3.3 Spring. Electroless nickel in accordance with MIL-C-26074, class 2.

3.4 Optional features.

3.4.1 Optional housing index pins. A suffix P shall be added to the PIN (see 1.2) when optional housing index pins are required. These pins are shown on figure 1.

3.4.2 Optional yellow hex head indexing. A suffix H shall be added to the PIN (see 1.2) when optional yellow hex head indexing is required for rod assembly types E or F (.188 inch (4.7625 mm) hex head drive with aluminum or steel rod). The hex head of the drive rod shall be indexed with a groove to indicate locked or unlocked positions in accordance with figure 6.

3.5 Certificate of compliance. A certificate of compliance shall be required from manufacturers requesting to be a suggested source of supply.

3.6 Marking. Marking of the card guide is not required; however, each unit package shall be marked in accordance with MIL-STD-1285 and include the PIN as specified herein (see 1.2), the manufacturer's name or Commercial and Government Entity (CAGE) code, and date lot codes.


3.7 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.8 Workmanship. Card holders shall be processed in such a manner as to be uniform in quality and shall be free from surface and finish flaws that could affect life or serviceability. Burrs, chipping, and cracking are unacceptable.

TABLE II. Board thickness details.

Board thickness Inches (mm)	Dimension "K" (reference) Inches (mm)	Dimension "L" (reference) Inches (mm)
.062 (1.57)	.063 (1.60)	.400 (10.16)
.093 (2.36)	.079 (2.00)	.447 (11.35)
.125 (3.18)	.082 (2.08)	.478 (12.14)


DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 5

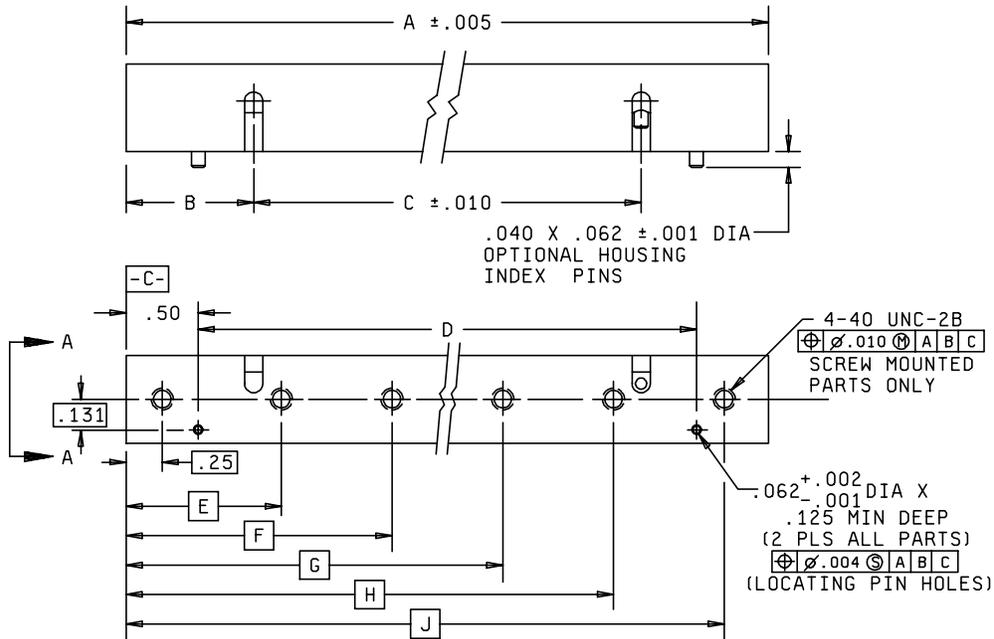

NOTE: See table I for dimensions A through J.

FIGURE 1. Housing design and dimensions.

<p>DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO</p>	<p>SIZE A</p>	<p>CODE IDENT NO. 14933</p>	<p>DWG NO. 85033</p>
		<p>REV G DRAFT</p>	<p>PAGE 6</p>

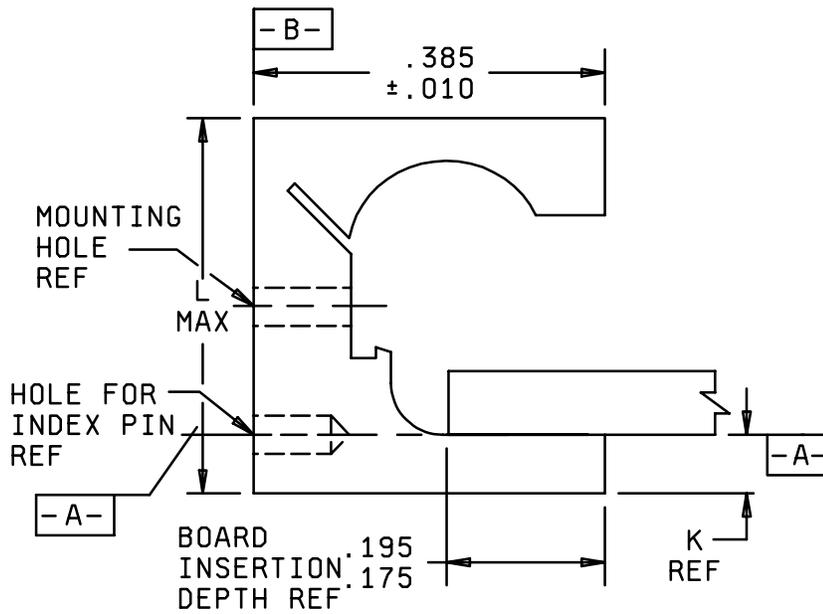

See table II for board thickness details.


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.025	.062	1.58	.125	3.18	.385	9.78
.002	0.05	.063	1.60	.131	3.33	.400	10.16
.004	0.10	.079	2.00	.175	4.45	.447	11.35
.005	0.13	.082	2.08	.195	4.95	.478	12.14
.010	0.25	.093	2.36	.250	6.35	.50	12.70
.040	1.01						

NOTES:

1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is $\pm .02$ inch (0.5 mm) for two place decimals and $\pm .010$ (0.25 mm) for three place decimals.

FIGURE 1. Housing design and dimensions – Continued.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 7

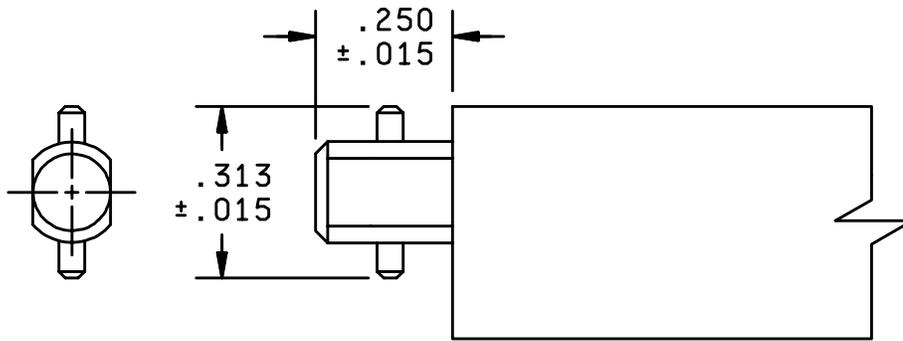


Inches	mm	Inches	mm
.015	0.38	.313	7.95
.250	6.35		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .010$ inch (0.25 mm) for two place decimals and $\pm .005$ (0.13 mm) for three place decimals.

FIGURE 2. Dimensions of pin drive rod, types A and B.

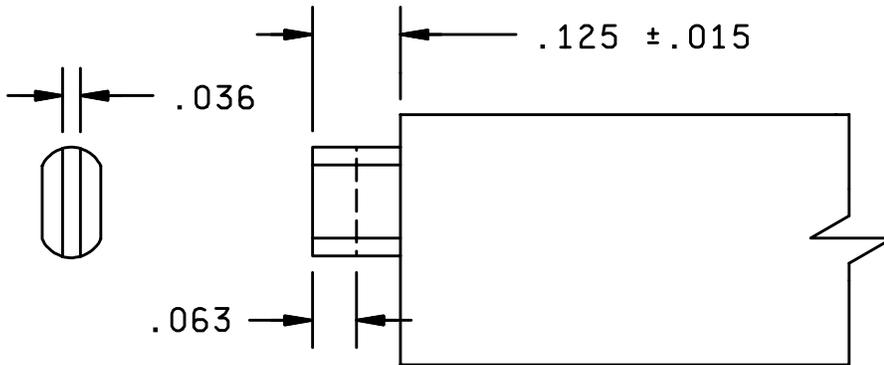


Inches	mm	Inches	mm
.015	0.38	.063	1.60
.036	0.91	.125	3.18

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .010$ inch (0.25 mm) for two place decimals and $\pm .005$ (0.13 mm) for three place decimals.

FIGURE 3. Dimensions of screwdriver slot drive rod, type C.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 8

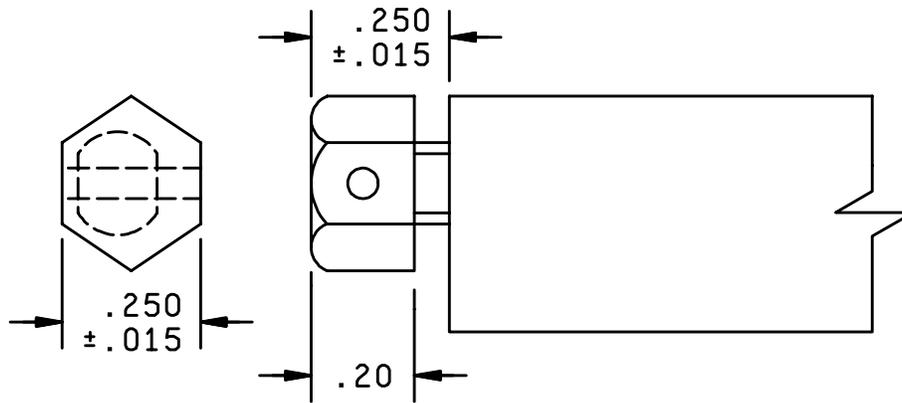


Inches	mm	Inches	mm
.015	0.38	.250	6.35
.20	5.08		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .010$ inch (0.25 mm) for two place decimals and $\pm .005$ (0.13 mm) for three place decimals.

FIGURE 4. Dimensions of .25 inch (0.635 mm) hex-head drive (with aluminum rod), type D.

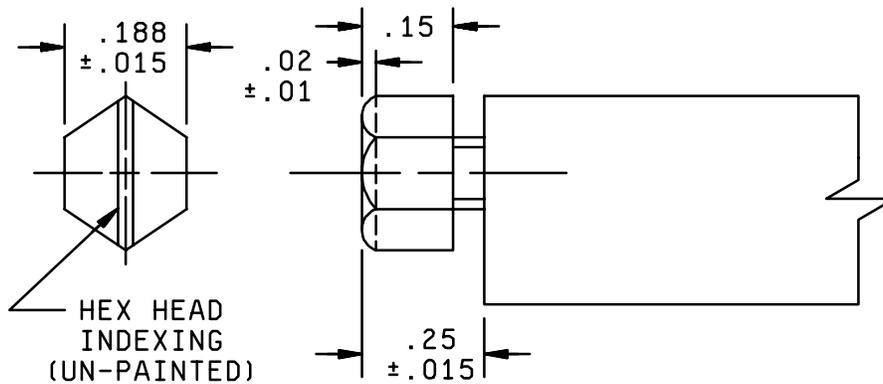


Inches	mm	Inches	mm
.015	0.38	.250	6.35
.188	4.78		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .010$ inch (0.25 mm) for two place decimals and $\pm .005$ (0.13 mm) for three place decimals.

FIGURE 5. Dimensions of .188 inch (4.7625 mm) hex-head drive (with aluminum or steel rod), types E and F.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 9

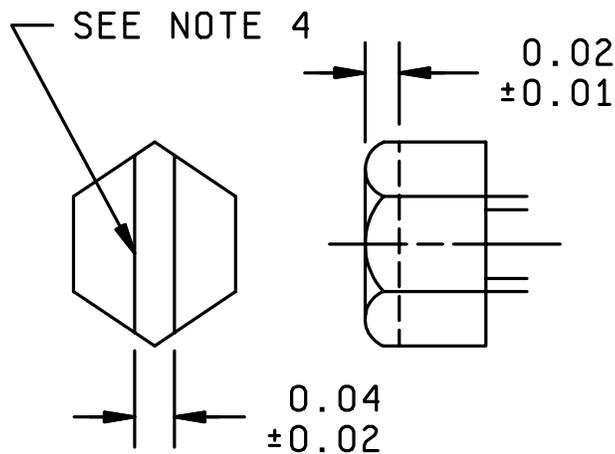

**ORIENTATION OF GROOVE
HEX HEAD INDEXING**

Inches	mm	Inches	mm
.01	0.3	.04	1.0
.02	0.5		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .010$ inch (0.25 mm) for two place decimals and $\pm .005$ inch (0.13 mm) or three place decimals.
4. The method in which the hex head indexing groove is applied is optional (cut, stamped, machined, etc.). The indexing groove indicates that the card holder is in the locked position when the indexing groove is 90 degrees from the plane of the circuit card assembly and in the unlocked position when the indexing groove is parallel to the plane of the circuit card assembly. The groove surface shall be coated in accordance with A-A-56032 using yellow ink, the yellow ink will appear in the indexing groove, only. Thickness and adhesion testing shall not be required. The groove shall be treated to prevent corrosion.

FIGURE 6. Dimensions of .188 inch (4.7625 mm) hex-head drive (with optional yellow hex drive rod indexing), types E and F.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 10

TABLE III. Device numbers and dimensions.

PIN device number	Housing number <u>1/</u>	Rod assembly type <u>2/</u>	Board thickness <u>3/</u>	R = Right L = Left	PIN device number	Housing number <u>1/</u>	Rod assembly type <u>2/</u>	Board thickness <u>3/</u>	R = Right L = Left
001	09	A	.062	R	031	05	C	.125	R
002	09	B	.062	R	032	05	D	.125	R
003	09	C	.062	R	033	06	A	.125	R
004	09	D	.062	R	034	06	B	.125	R
005	09	A	.093	R	035	06	C	.125	R
006	09	B	.093	R	036	06	D	.125	R
007	09	C	.093	R	037	07	A	.125	R
008	09	D	.093	R	038	07	B	.125	R
009	09	A	.062	L	039	07	C	.125	R
010	09	B	.062	L	040	07	D	.125	R
011	09	C	.062	L	041	08	A	.125	R
012	09	D	.062	L	042	08	B	.125	R
013	09	A	.093	L	043	08	C	.125	R
014	09	B	.093	L	044	08	D	.125	R
015	09	C	.093	L	045	09	A	.125	R
016	09	D	.093	L	046	09	B	.125	R
017	12	A	.062	R	047	09	C	.125	R
018	12	B	.062	R	048	09	D	.125	R
019	12	D	.062	R	049	10	A	.125	R
020	12	A	.093	R	050	10	B	.125	R
021	12	B	.093	R	051	10	D	.125	R
022	12	D	.093	R	052	11	A	.125	R
023	12	A	.062	L	053	11	B	.125	R
024	12	B	.062	L	054	11	D	.125	R
025	12	D	.062	L	055	12	A	.125	R
026	12	A	.093	L	056	12	B	.125	R
027	12	B	.093	L	057	12	D	.125	R
028	12	D	.093	L	058	05	A	.125	L
029	05	A	.125	R	059	05	B	.125	L
030	05	B	.125	R	060	05	C	.125	L

See footnotes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 11

TABLE III. Device numbers and dimensions – Continued.

PIN device number	Housing number ^{1/}	Rod assembly type ^{2/}	Board thickness ^{3/}	R = Right L = Left	PIN device number	Housing number ^{1/}	Rod assembly type ^{2/}	Board thickness ^{3/}	R = Right L = Left
061	05	D	.125	L	091	04	A	.062	R
062	06	A	.125	L	092	04	B	.062	R
063	06	B	.125	L	093	04	C	.062	R
064	06	C	.125	L	094	04	D	.062	R
065	06	D	.125	L	095	05	A	.062	R
066	07	A	.125	L	096	05	B	.062	R
067	07	B	.125	L	097	05	C	.062	R
068	07	C	.125	L	098	05	D	.062	R
069	07	D	.125	L	099	06	A	.062	R
070	08	A	.125	L	100	06	B	.062	R
071	08	B	.125	L	101	06	C	.062	R
072	08	C	.125	L	102	06	D	.062	R
073	08	D	.125	L	103	07	A	.062	R
074	09	A	.125	L	104	07	B	.062	R
075	09	B	.125	L	105	07	C	.062	R
076	09	C	.125	L	106	07	D	.062	R
077	09	D	.125	L	107	08	A	.062	R
078	10	A	.125	L	108	08	B	.062	R
079	10	B	.125	L	109	08	C	.062	R
080	10	D	.125	L	110	08	D	.062	R
081	11	A	.125	L	111	03	A	.062	L
082	11	B	.125	L	112	03	B	.062	L
083	11	D	.125	L	113	03	C	.062	L
084	12	A	.125	L	114	03	D	.062	L
085	12	B	.125	L	115	04	A	.062	L
086	12	D	.125	L	116	04	B	.062	L
087	03	A	.062	R	117	04	C	.062	L
088	03	B	.062	R	118	04	D	.062	L
089	03	C	.062	R	119	05	A	.062	L
090	03	D	.062	R	120	05	B	.062	L

See footnotes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 12

TABLE III. Device numbers and dimensions – Continued.

PIN device number	Housing number <u>1/</u>	Rod assembly type <u>2/</u>	Board thickness <u>3/</u>	R = Right L = Left	PIN device number	Housing number <u>1/</u>	Rod assembly type <u>2/</u>	Board thickness <u>3/</u>	R = Right L = Left
121	05	C	.062	L	151	07	A	.093	R
122	05	D	.062	L	152	07	B	.093	R
123	06	A	.062	L	153	07	C	.093	R
124	06	B	.062	L	154	07	D	.093	R
125	06	C	.062	L	155	08	A	.093	R
126	06	D	.062	L	156	08	B	.093	R
127	07	A	.062	L	157	08	C	.093	R
128	07	B	.062	L	158	08	D	.093	R
129	07	C	.062	L	159	03	A	.093	L
130	07	D	.062	L	160	03	B	.093	L
131	08	A	.062	L	161	03	C	.093	L
132	08	B	.062	L	162	03	D	.093	L
133	08	C	.062	L	163	04	A	.093	L
134	08	D	.062	L	164	04	B	.093	L
135	03	A	.093	R	165	04	C	.093	L
136	03	B	.093	R	166	04	D	.093	L
137	03	C	.093	R	167	05	A	.093	L
138	03	D	.093	R	168	05	B	.093	L
139	04	A	.093	R	169	05	C	.093	L
140	04	B	.093	R	170	05	D	.093	L
141	04	C	.093	R	171	06	A	.093	L
142	04	D	.093	R	172	06	B	.093	L
143	05	A	.093	R	173	06	C	.093	L
144	05	B	.093	R	174	06	D	.093	L
145	05	C	.093	R	175	07	A	.093	L
146	05	D	.093	R	176	07	B	.093	L
147	06	A	.093	R	177	07	C	.093	L
148	06	B	.093	R	178	07	D	.093	L
149	06	C	.093	R	179	08	A	.093	L
150	06	D	.093	R	180	08	B	.093	L

See footnotes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 13

TABLE III. Device numbers and dimensions – Continued.

PIN device number	Housing number <u>1/</u>	Rod assembly type <u>2/</u>	Board thickness <u>3/</u>	R = Right L = Left	PIN device number	Housing number <u>1/</u>	Rod assembly type <u>2/</u>	Board thickness <u>3/</u>	R = Right L = Left
181	08	C	.093	L	202	16	D	.093	L
182	08	D	.093	L	203	16	D	.125	R
183	03	A	.125	R	204	16	D	.125	L
184	03	B	.125	R	205	20	F	.062	R
185	03	C	.125	R	206	20	F	.062	L
186	03	D	.125	R	207	20	F	.093	R
187	04	A	.125	R	208	20	F	.093	L
188	04	B	.125	R	209	20	F	.125	R
189	04	C	.125	R	210	20	F	.125	L
190	04	D	.125	R	211	14	E	.062	R
191	03	A	.125	L	212	14	E	.062	L
192	03	B	.125	L	213	14	E	.093	R
193	03	C	.125	L	214	14	E	.093	L
194	03	D	.125	L	215	14	E	.125	R
195	04	A	.125	L	216	14	E	.125	L
196	04	B	.125	L	217	14	F	.062	R
197	04	C	.125	L	218	14	F	.062	L
198	04	D	.125	L	219	14	F	.093	R
199	16	D	.062	R	220	14	F	.093	L
200	16	D	.062	L	221	14	F	.125	R
201	16	D	.093	R	222	14	F	.125	L

- 1/ See table I for housing number details.
2/ A = Pin drive with aluminum rod.
 B = Pin drive with steel rod.
 C = Screwdriver slot drive with steel rod.
 D = 1/4 Hex head drive with aluminum rod.
 E = 3/16 hex head drive with aluminum rod.
 F = 3/16 hex head with steel rod.
3/ See table II for board thickness details.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 14

4. VERIFICATION

4.1 Sampling and inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this drawing where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Conformance inspections.

4.2.1 Inspection of product for delivery. Inspection of product for delivery shall consist of visual and mechanical inspections of interface and physical dimensions (see 3.1), materials (see 3.2), and workmanship (see 3.8). Criteria for defects are listed in 4.2.5.

4.2.2 Optional statement of compliance. The acquiring activity, at its discretion, may accept a statement of compliance in lieu of the manufacturer performing the inspection of product for delivery (see 6.2.b).

4.2.3 Sampling plan. A sample of parts shall be randomly selected in accordance with table IV, normal sampling. If one or more defects are found, the lot shall be rejected. Criteria for defects are listed in 4.2.5.

4.2.4 Rejected lots. If an inspection lot is rejected after normal sampling inspection, the manufacturer may rework it to correct the defects, or screen out the defective parts and resubmit for inspection. Resubmitted lots shall be inspected by selecting a random sample of parts in accordance with table IV, tightened sampling. If one or more defects are found in this sample, the lot shall be rejected and shall not be supplied to this specification. Resubmitted lots which are acceptable shall be clearly identified as reinspected lots.

TABLE IV. Sampling plan.

Lot size	Normal	Tightened
2 to 25	3	5
26 to 50	5	6
51 to 90	6	7
91 to 150	7	11
151 to 280	10	13
281 to 500	11	16
501 to 1,200	15	19
1,201 to 3,200	18	23
3,201 to 10,000	22	29
10,001 and over	29	35

4.2.5 Defective characteristics and properties. Dimensional characteristics are considered defective when out of tolerance. Physical and functional properties are considered defective when outside the specified minimum, maximum, or range as applicable. Workmanship characteristics are considered defective when they would be detrimental to the intended use, performance requirements, or environmental survival of the part.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 15

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. Card holders conforming to this drawing are intended for use when performance specifications do not exist and qualified military devices that will perform the required function are not available for OEM application.

6.2 Ordering data. The contract or purchase order should specify the following:

- a. Complete PIN (see 1.2).
- b. Requirements for delivery of one copy of the conformance inspection data or certificate of compliance that parts have passed conformance inspection with each shipment of parts by the manufacturer.
- c. Requirements for packaging and packing.

6.3 Users of record. Coordination of this document for future revisions are coordinated only with the suggested sources of supply and the users of record of this document. Requests to be added as a recorded user of this drawing should be in writing to: Defense Supply Center, Columbus, ATTN: DSCC/VAC, Post Office Box 3990, Columbus, OH 43216-5000 or by electronic mail at "5998.Documents@dscclia.mil" or by facsimile (614) 692-6939 or DSN 850-6939.

6.4 Patent notice. The items covered by this drawing are covered by patent 3,975,805, expiration date, August 24, 1993, and 4,502,601, expiration date March 5, 2002. The Government does not possess a royalty-free license under these patents for the benefit of manufacturers of the item, either for the Government or for the use in equipment to be delivered to the Government.

6.5 Supersession data. See table V.

TABLE V. Supersession information. 1/

Superseding PIN	Superseded part number per 85033D, 21 July 1989 2/	Superseded part number per 85033C, 6 August 1987	Superseded part number per 85033, 1 July 1985 85033A, 6 February 1986 85033B, 23 March 1987
85033-AC***	85033-AC***	85033-***	85033-***
85033-AC***P	85033-AC***P	85033-***P	

1/ The asterisk "*" are used to denote the dash number or device numbers which did not change.
 2/ Prior to 85033D of 21 July 1989, all card holders housings were available with only chemical film in accordance with MIL-C-5541 (option "C").

6.6 Suggested sources of supply. Suggested sources of supply are listed herein. Additional sources will be added as they become available. For assistance in the use of this drawing, contact Defense Supply Center, Columbus, ATTN: DSCC-VAC, Post Office Box 3990, Columbus, OH 43216-5000 or by electronic mail "5998.Documents@dscclia.mil" or by facsimile (614) 692-6939 or DSN 850-6939.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 16

DSCC drawing device PIN 85033 (1) (2)	Vendor similar designation or type number (3)	Vendor CAGE	Vendor name and address
—001 —002 —003 —004 —005 —006 —007 —008 —009 —010 —011 —012 —013 —014 —015 —016 —017 —018 —019 —020	Z*S@11-062-09R-#BN Z*S@21-062-09R-#PN Z*S@31-062-09R-#PN Z*S@41-062-09R-#BN Z*S@11-093-09R-#BN Z*S@21-093-09R-#PN Z*S@31-093-09R-#PN Z*S@41-093-09R-#BN Z*S@11-062-09L-#BN Z*S@21-062-09L-#PN Z*S@31-062-09L-#PN Z*S@41-062-09L-#BN Z*S@11-093-09L-#BN Z*S@21-093-09L-#PN Z*S@31-093-09L-#PN Z*S@41-093-09L-#BN Z*S@11-062-12R-#BN Z*S@21-062-12R-#PN Z*S@41-062-12R-#BN Z*S@11-093-12R-#BN	98978	International Electronic Research Corporation (IERC) 413 North Moss Street Burbank, CA 91502 Tel: (818) 842-7277 Fax: (818) 848-8872 E-mail: sales@ctscorp.com URL: www.ctscorp.com
—021 —022 —023 —024 —025 —026 —027 —028 —029 —030 —031 —032 —033 —034 —035 —036 —037 —038 —039 —040	Z*S@21-093-12R-#PN Z*S@41-093-12R-#BN Z*S@11-062-12L-#BN Z*S@21-062-12L-#PN Z*S@41-062-12L-#BN Z*S@11-093-12L-#BN Z*S@21-093-12L-#PN Z*S@41-093-12L-#BN Z*S@11-125-05R-#BN Z*S@21-125-05R-#PN Z*S@31-125-05R-#PN Z*S@41-125-05R-#BN Z*S@11-125-06R-#BN Z*S@21-125-06R-#PN Z*S@31-125-06R-#PN Z*S@41-125-06R-#BN Z*S@11-125-07R-#BN Z*S@21-125-07R-#PN Z*S@31-125-07R-#PN Z*S@41-125-07R-#BN		

See notes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 17

DSCC drawing device PIN 85033 (1) (2)	Vendor similar designation or type number (3)	Vendor CAGE	Vendor name and address
—041 —042 —043 —044 —045 —046 —047 —048 —049 —050 —051 —052 —053 —054 —055 —056 —057 —058 —059 —060	Z*S@11-125-08R-#BN Z*S@21-125-08R-#PN Z*S@31-125-08R-#PN Z*S@41-125-08R-#BN Z*S@11-125-09R-#BN Z*S@21-125-09R-#PN Z*S@31-125-09R-#PN Z*S@41-125-09R-#BN Z*S@11-125-10R-#BN Z*S@21-125-10R-#PN Z*S@41-125-10R-#BN Z*S@11-125-11R-#BN Z*S@21-125-11R-#PN Z*S@41-125-11R-#BN Z*S@11-125-12R-#BN Z*S@21-125-12R-#PN Z*S@41-125-12R-#BN Z*S@11-125-05L-#BN Z*S@21-125-05L-#PN Z*S@31-125-05L-#PN	98978	International Electronic Research Corporation (IERC) 413 North Moss Street Burbank, CA 91502 Tel: (818) 842-7277 Fax: (818) 848-8872 E-mail: sales@ctscorp.com URL: www.ctscorp.com
—061 —062 —063 —064 —065 —066 —067 —068 —069 —070 —071 —072 —073 —074 —075 —076 —077 —078 —079 —080	Z*S@41-125-05L-#BN Z*S@11-125-06L-#BN Z*S@21-125-06L-#PN Z*S@31-125-06L-#PN Z*S@41-125-06L-#BN Z*S@11-125-07L-#BN Z*S@21-125-07L-#PN Z*S@31-125-07L-#PN Z*S@41-125-07L-#BN Z*S@11-125-08L-#BN Z*S@21-125-08L-#PN Z*S@31-125-08L-#PN Z*S@41-125-08L-#BN Z*S@11-125-09L-#BN Z*S@21-125-09L-#PN Z*S@31-125-09L-#PN Z*S@41-125-09L-#BN Z*S@11-125-10L-#BN Z*S@21-125-10L-#PN Z*S@41-125-10L-#BN		

See notes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 18

DSCC drawing device PIN 85033 (1) (2)	Vendor similar designation or type number (3)	Vendor CAGE	Vendor name and address
—081 —082 —083 —084 —085 —086 —087 —088 —089 —090 —091 —092 —093 —094 —095 —096 —097 —098 —099 —100	Z*S@11-125-11L-#BN Z*S@21-125-11L-#PN Z*S@41-125-11L-#BN Z*S@11-125-12L-#BN Z*S@21-125-12L-#PN Z*S@41-125-12L-#BN Z*S@11-062-03R-#BN Z*S@21-062-03R-#PN Z*S@31-062-03R-#PN Z*S@41-062-03R-#BN Z*S@11-062-04R-#BN Z*S@21-062-04R-#PN Z*S@31-062-04R-#PN Z*S@41-062-04R-#BN Z*S@11-062-05R-#BN Z*S@21-062-05R-#PN Z*S@31-062-05R-#PN Z*S@41-062-05R-#BN Z*S@11-062-06R-#BN Z*S@21-062-06R-#PN	98978	International Electronic Research Corporation (IERC) 413 North Moss Street Burbank, CA 91502 Tel: (818) 842-7277 Fax: (818) 848-8872 E-mail: sales@ctscorp.com URL: www.ctscorp.com
—101 —102 —103 —104 —105 —106 —107 —108 —109 —110 —111 —112 —113 —114 —115 —116 —117 —118 —119 —120	Z*S@31-062-06R-#PN Z*S@41-062-06R-#BN Z*S@11-062-07R-#BN Z*S@21-062-07R-#PN Z*S@31-062-07R-#PN Z*S@41-062-07R-#BN Z*S@11-062-08R-#BN Z*S@21-062-08R-#PN Z*S@31-062-08R-#PN Z*S@41-062-08R-#BN Z*S@11-062-03L-#BN Z*S@21-062-03L-#PN Z*S@31-062-03L-#PN Z*S@41-062-03L-#BN Z*S@11-062-04L-#BN Z*S@21-062-04L-#PN Z*S@31-062-04L-#PN Z*S@41-062-04L-#BN Z*S@11-062-05L-#BN Z*S@21-062-05L-#PN		

See notes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 19

DSCC drawing device PIN 85033 (1) (2)	Vendor similar designation or type number (3)	Vendor CAGE	Vendor name and address
—121 —122 —123 —124 —125 —126 —127 —128 —129 —130 —131 —132 —133 —134 —135 —136 —137 —138 —139 —140	Z*S@31-062-05L-#PN Z*S@41-062-05L-#BN Z*S@11-062-06L-#BN Z*S@21-062-06L-#PN Z*S@31-062-06L-#PN Z*S@41-062-06L-#BN Z*S@11-062-07L-#BN Z*S@21-062-07L-#PN Z*S@31-062-07L-#PN Z*S@41-062-07L-#BN Z*S@11-062-08L-#BN Z*S@21-062-08L-#PN Z*S@31-062-08L-#PN Z*S@41-062-08L-#BN Z*S@11-093-03R-#BN Z*S@21-093-03R-#PN Z*S@31-093-03R-#PN Z*S@41-093-03R-#BN Z*S@11-093-04R-#BN Z*S@21-093-04R-#PN	98978	International Electronic Research Corporation (IERC) 413 North Moss Street Burbank, CA 91502 Tel: (818) 842-7277 Fax: (818) 848-8872 E-mail: sales@ctscorp.com URL: www.ctscorp.com
—141 —142 —143 —144 —145 —146 —147 —148 —149 —150 —151 —152 —153 —154 —155 —156 —157 —158 —159 —160	Z*S@31-093-04R-#PN Z*S@41-093-04R-#BN Z*S@11-093-05R-#BN Z*S@21-093-05R-#PN Z*S@31-093-05R-#PN Z*S@41-093-05R-#BN Z*S@11-093-06R-#BN Z*S@21-093-06R-#PN Z*S@31-093-06R-#PN Z*S@41-093-06R-#BN Z*S@11-093-07R-#BN Z*S@21-093-07R-#PN Z*S@31-093-07R-#PN Z*S@41-093-07R-#BN Z*S@11-093-08R-#BN Z*S@21-093-08R-#PN Z*S@31-093-08R-#PN Z*S@41-093-08R-#BN Z*S@11-093-03L-#BN Z*S@21-093-03L-#PN		

See notes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 20

DSCC drawing device PIN 85033 (1) (2)	Vendor similar designation or type number (3)	Vendor CAGE	Vendor name and address
—161 —162 —163 —164 —165 —166 —167 —168 —169 —170 —171 —172 —173 —174 —175 —176 —177 —178 —179 —180	Z*S@31-093-03L-#PN Z*S@41-093-03L-#BN Z*S@11-093-04L-#BN Z*S@21-093-04L-#PN Z*S@31-093-04L-#PN Z*S@41-093-04L-#BN Z*S@11-093-05L-#BN Z*S@21-093-05L-#PN Z*S@31-093-05L-#PN Z*S@41-093-05L-#BN Z*S@11-093-06L-#BN Z*S@21-093-06L-#PN Z*S@31-093-06L-#PN Z*S@41-093-06L-#BN Z*S@11-093-07L-#BN Z*S@21-093-07L-#PN Z*S@31-093-07L-#PN Z*S@41-093-07L-#BN Z*S@11-093-08L-#BN Z*S@21-093-08L-#PN	98978	International Electronic Research Corporation (IERC) 413 North Moss Street Burbank, CA 91502 Tel: (818) 842-7277 Fax: (818) 848-8872 E-mail: sales@ctscorp.com URL: www.ctscorp.com
—181 —182 —183 —184 —185 —186 —187 —188 —189 —190 —191 —192 —193 —194 —195 —196 —197 —198 —199 —200	Z*S@31-093-08L-#PN Z*S@41-093-08L-#BN Z*S@11-125-03R-#BN Z*S@21-125-03R-#PN Z*S@31-125-03R-#PN Z*S@41-125-03R-#BN Z*S@11-125-04R-#BN Z*S@21-125-04R-#PN Z*S@31-125-04R-#PN Z*S@41-125-04R-#BN Z*S@11-125-03L-#BN Z*S@21-125-03L-#PN Z*S@31-125-03L-#PN Z*S@41-125-03L-#BN Z*S@11-125-04L-#BN Z*S@11-125-04L-#PN Z*S@31-125-04L-#PN Z*S@21-125-04L-#BN Z*S@41-062-16R-#BN Z*S@41-062-16L-#BN		

See notes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 21

DSCC drawing device PIN 85033 (1) (2)	Vendor similar designation or type number (3)	Vendor CAGE	Vendor name and address
—201 —202 —203 —204 —205 —206 —207 —208 —209 —210	Z*S@41-093-16R-#BN Z*S@41-093-16L-#BN Z*S@41-125-16R-#BN Z*S@41-125-16L-#BN Z*S@71-062-20R-#PN Z*S@71-062-20L-#PN Z*S@71-093-20R-#PN Z*S@71-093-20L-#PN Z*S@71-125-20R-#PN Z*S@71-125-20L-#PN	98978	International Electronic Research Corporation (IERC) 413 North Moss Street Burbank, CA 91502 Tel: (818) 842-7277 Fax: (818) 848-8872 E-mail: sales@ctscorp.com URL: www.ctscorp.com
—211 —212 —213 —214 —215 —216 —217 —218 —219 —220 —221 —222	Z*S@61-062-14R-#PN Z*S@61-062-14L-#PN Z*S@61-093-14R-#PN Z*S@61-093-14L-#PN Z*S@61-125-14R-#PN Z*S@61-125-14L-#PN Z*S@71-062-14R-#PN Z*S@71-062-14L-#PN Z*S@71-093-14R-#PN Z*S@71-093-14L-#PN Z*S@71-125-14R-#PN Z*S@71-125-14L-#PN		

- (1) Parts must be purchased to this DSCC PIN to assure that all performance requirements and tests are met.
- (2) Abbreviated PIN's are shown for convenience. See 1.2 for complete PIN format.
- (3) CAGE 98978 PIN variations:
- Version: Second digit * will be A for assembled version or K for kit version (see 3.2).
 - Optional housing index pins: Fourth digit @ will be 1 without index pins or 2 with index pins (see 3.4.1).
 - Housing finish: Thirteenth digit # will be B for black anodize finish, R for chemical film finish, or U for no finish (see 3.3.1).
 - Rod assembly types E and F, figure 6, the B following the # digit will be A for aluminum hex head indexing painted yellow and will be S for stainless steel.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 22

DSCC drawing PIN 85033 (1) (2)	Vendor similar designation or type number (3)	Vendor CAGE	Vendor name and address
85033—@#001** through 85033—@#222**	85033—@#001** through 85033—@#222**	63592	Starwin Industries, Incorporated 3387 Woodman Drive Kettering, OH 45429 Tel: (937) 293-8568 Fax: (937) 299-0698 E-mail: dgrossman@starwin-ind.com URL: www.starwin-ind.com

- (1) Parts must be purchased to this DSCC PIN to assure that all performance requirements and tests are met.
- (2) Abbreviated PIN's are shown for convenience. See 1.2 for complete PIN format.
- (3) Vendor 63592 PIN's are identical to the DSCC PIN's.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 14933	DWG NO. 85033
		REV G DRAFT	PAGE 23