

INCH-POUND

MIL-DTL-52525/34A
30 June 1998
SUPERSEDING
MIL-F-52525/34
30 June 1987

DETAIL SPECIFICATION SHEET

FITTINGS, HOSE, SCREW-ON TO 4-BOLT SPLIT-FLANGE,
STRAIGHT, TYPE 100RE

This specification is approved for use by all Departments and
Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this
specification sheet and MIL-DTL-52525. The fittings described herein are for use with
MIL-DTL-52471, type 100RE, 4-spiral-wrap reinforcement hose.

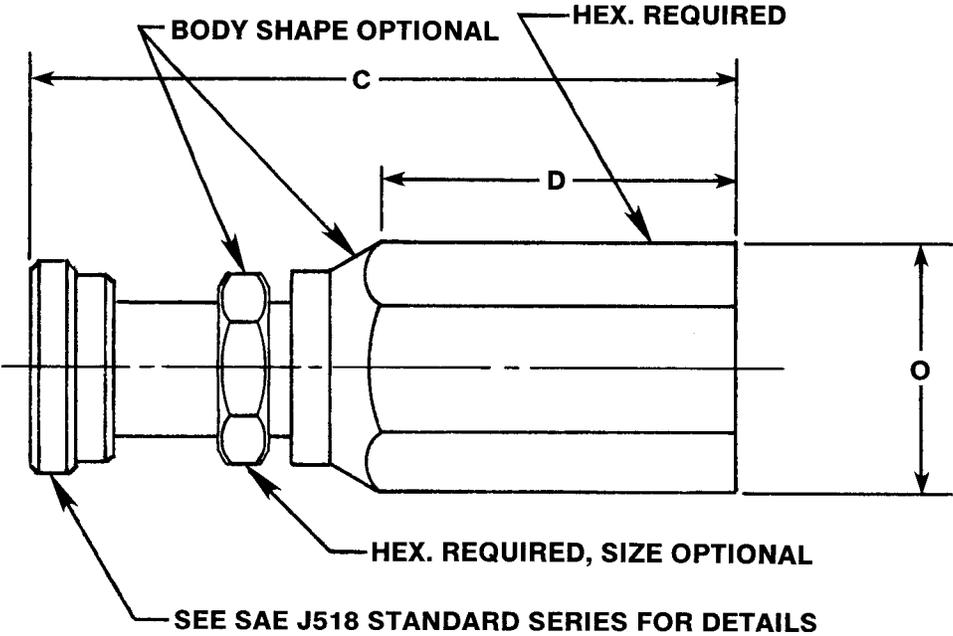


FIGURE 1. Fitting, screw-on to 4-bolt split-flange, straight.

MIL-DTL-52525/34A

TABLE I. Dimensions for type 100RE fittings, straight.

Part number	Hose dash no.	Hose I.D.	Hose O.D.	Tube dash no.	Tube O.D.	Flange dash size
M52525/34-12-12	12	0.75	1.26	12	0.75	12
M52525/34-16-16	16	1.00	1.51	16	1.00	16

TABLE I. Dimensions for type 100RE fittings, straight - Continued.

Part number	A Maximum	B Maximum	C Minimum
M52525/34-12-12	6.00	1.88	.60
M52525/34-16-16	7.00	2.31	.75

TABLE II. Maximum operating pressures of fittings.

Hose I.D.	PSI
0.75	6250
1.00	5000


REQUIREMENTS:

1. Fittings shall be in accordance with figure 1 and tables I, and II.
2. Materials and finishes shall be as specified in MIL-DTL-52525.
3. Marking shall include the manufacturer's name or trademark, size, and hose identifier 100RE. Location of marking is optional.

NOTES:

1. Dimensions are in inches.
2. Part number.

Example of a Military part number: M52525/34-12-12

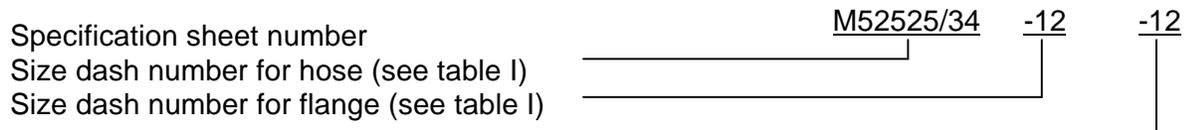

MIL-DTL-52525/34A

CONCLUDING MATERIAL

Custodian:
Army - AT
Air Force - 99

Preparing activity:
DLA - CC

(Project 4730-0859-23)

Review activities:
Air Force - 82
Army - AR