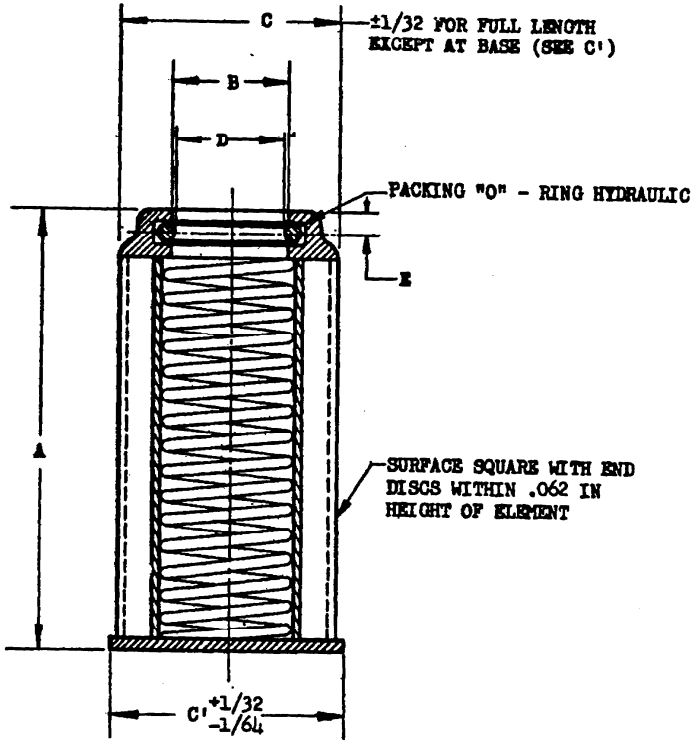

AN PART NO.	A +1/16 -0 (4)	B ±1/64 DIA	C AND C' DIA	D DIA NOMINAL	E MAX	CAPACITY GPM	PACKING "O" - RING HYDRAULIC
(a) AN6235-1A	1-7/8	25/64	53/64	3/8	.109	1/2	AN6227-7
(a) AN6235-2A	4-5/8	41/64	1- 1/8	5/8	.125	3	AN6227-12
(a) AN6235-3A	3-7/16	57/64	1- 5/8	7/8	.218	6	AN6227-17
(a) AN6235-4A	4-7/16	1- 1/64	1- 3/4	1	.218	12	AN6227-19

(a) PREVIOUS PART NUMBERS AN6235-1, -2, -3 AND -4 INACTIVE FOR DESIGN AFTER 19 JUN 45: PART NUMBERS AN6235-1A, -2A, -3A and -4A REPLACE AND ARE INTERCHANGEABLE WITH PART NUMBERS AN6235-1, -2, -3, AND -4 RESPECTIVELY.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTE, SEE ANA BULLETIN NO. 337.

ELEMENT FOR USE IN AN6234 FILTER.

QPL-5504 LISTS PRODUCTS CONSIDERED ACCEPTABLE UNDER THIS DRAWING AND THE PROCUREMENT SPECIFICATION

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/32.

APPROVED 23 Jun 43 REVISED (1) 19 Jun 45 (2) 27 Sep 48 (3) 2 Apr 51 (4) 4 Nov 52

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN6235
MIL-F-5504	FILTER ELEMENT - HYDRAULIC REPLACEABLE MICRONIC LINE TYPE	