


PERFORMANCE SPECIFICATION SHEET


OSCILLATOR, CRYSTAL CONTROLLED, TYPE 1 (CRYSTAL OSCILLATOR (XO)),  
1 kHz THROUGH 60 MHz, HERMETIC SEAL, SQUARE WAVE, TTL

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein  
shall consist of this specification and MIL-PRF-55310.

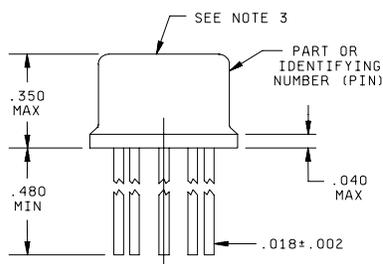

Pin number	Function
1	NC
2	NC
3	NC
4	B - (GND/CASE) (See note 5)
5	OUTPUT
6	NC
7	NC
8	B+

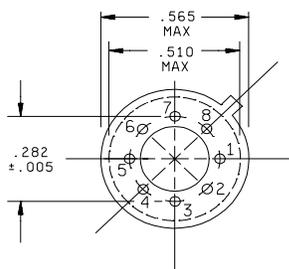

Inches	mm	Inches	mm
.002	0.05	.350	8.89
.005	0.13	.480	12.19
.018	0.46	.510	12.95
.040	1.02	.610	15.49
.282	7.16		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Standard marking, except omit Part or Identifying Number (PIN) this location.
4. Unless otherwise specified, tolerances are  $\pm 0.005$  (0.13 mm) for three place decimals and  $\pm 0.02$  (0.5 mm) for two place decimals.
5. Case to be connected to base pin 4 to permit shielding of the oscillator.
6. All pins with NC function may be connected internally and are not to be used as external tie points or connections.
7. Pin numbers shown on package are for reference only and need not appear on part.

FIGURE 1. Dimensions and configuration.

MIL-PRF-55310/10G

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Mounting: See figure 1.

Terminals: See figure 1.

Seal: Hermetic in accordance with MIL-PRF-55310, maximum leakage rate  $5 \times 10^{-8}$  atm cc/s.

Weight: 0.175 ounce, maximum.

\* Oscillator: Class 2 (see 1.2.3 of MIL-PRF-55310).

Calibration: Manufacturer calibrated.

\* Screening: In accordance with MIL-PRF-55310, product level B or S, as applicable.

Temperature:

Operating: See table I.

Storage:  $-62^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

Oscillator load: See table I.

Output waveform: Symmetrical square wave.

Supply voltage:  $+5\text{ V dc} \pm 10$  percent.

Input current: At designated supply voltage (see table I).

Output frequency: Frequency as designated at time of acquisition (see table I).

Output voltage: At designated TTL load (see table I).

Logic 1: 2.4 V dc minimum.

Logic 0: 0.5 V dc maximum.

Rise and fall times: See table I.

Duty cycle: See table I.

Initial accuracy at reference temperature (up to 30 days after shipment): See table I.

Initial frequency-temperature accuracy (one-half temperature cycle): Verification applicable. <sup>1/</sup>

Frequency-temperature tolerance (one-half temperature cycle, referenced to frequency measured at  $+23^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , immediately prior to starting of the test): See table I. Measurements taken at ten equally spaced increments over the specified operating temperature range. <sup>1/</sup>

<sup>1/</sup> For the purpose of transitioning this device to MIL-PRF-55310, 'Frequency stability versus temperature' has been renamed 'Frequency-temperature tolerance'. The verification requirements of 'initial frequency-temperature accuracy (one-half temperature cycle)' shall apply except that frequency measurements shall be referenced to the frequency measured at  $+23^{\circ}\text{C} \pm 1^{\circ}\text{C}$  ( $f_{\text{ref}}$ ) instead of to the nominal frequency ( $f_{\text{nom}}$ ).

MIL-PRF-55310/10G

\* TABLE I. Dash numbers and operating characteristics.

Dash number	Output frequency range	Input current max <u>1/</u> at 5.25 V $\pm 1\%$	Pulse characteristics			Initial accuracy ppm at +23°C $\pm 1^\circ\text{C}$	Frequency aging ppm/year after 30 days	Frequency-temperature tolerance (ppm)		
			Rise and fall times max	Duty cycle at 1.4 V	Load <u>2/</u>			-55°C to +125°C	-55°C to +105°C	-20°C to +70°C
								A	B	C
01	1 kHz to 400 kHz	80 mA	<u>ns</u> 15	<u>percent</u> 45 to 55	<u>max</u> 10 TTL	$\pm 15$	$\pm 5$	$\pm 50$	$\pm 40$	$\pm 25$
07	1 kHz to 400 kHz	80 mA	15	45 to 55	10 TTL	$\pm 25$	$\pm 10$	$\pm 100$	$\pm 80$	$\pm 50$
11	400 kHz to 5 MHz	55 mA	15	45 to 55	10 TTL	$\pm 15$	$\pm 5$	$\pm 50$	$\pm 40$	$\pm 25$
17	400 kHz to 5 MHz	55 mA	15	45 to 55	10 TTL	$\pm 25$	$\pm 10$	$\pm 100$	$\pm 80$	$\pm 50$
21	4 MHz to 20 MHz	40 mA	15	40 to 60	10 TTL	$\pm 15$	$\pm 5$	$\pm 50$	$\pm 40$	$\pm 25$
27	4 MHz to 20 MHz	40 mA	15	40 to 60	10 TTL	$\pm 25$	$\pm 10$	$\pm 100$	$\pm 80$	$\pm 50$
31	20 MHz to 60 MHz	65 mA	5	40 to 60	6 TTL	$\pm 15$	$\pm 5$	$\pm 50$	$\pm 40$	$\pm 25$
37	20 MHz to 60 MHz	65 mA	5	40 to 60	6 TTL	$\pm 25$	$\pm 10$	$\pm 100$	$\pm 80$	$\pm 50$

1/ Maximum input current for no load condition. Actual configuration of TTL loads must be added to determine power supply requirements.

2/ A TTL unit load is defined as: 1.6 mA sink, 0.04 mA source, and 2 pF capacitance.

Frequency-voltage tolerance:  $\pm 2$  ppm maximum for a  $\pm 10$  percent change in supply voltage. Measurements taken at reference temperature and operating temperature range end points.

Frequency aging: Measurements shall be taken at  $+70^\circ\text{C} \pm 0.2^\circ\text{C}$  at intervals of not more than every 72 hours for a minimum of 30 days (see table I).

$\pm 5$  ppm per year maximum  
 $\pm 0.7$  ppm per 30 days  
 $\pm 1.5$  ppm per 90 days

$\pm 10$  ppm per year maximum  
 $\pm 1.5$  ppm per 30 days  
 $\pm 3$  ppm per 90 days

Terminal strength: Method 211 of MIL-STD-202, test condition C.

Applied force: 2 pounds each terminal for 10 seconds.

Bends: Five at 45 degrees each.

Frequency-environmental tolerance: Not applicable.

Vibration, sinusoidal: In accordance with MIL-PRF-55310 and method 204 of MIL-STD-202.

Nonoperating: Test condition D.

Operating: Not required.

Ambient pressure:


Nonoperating: In accordance with MIL-0-55310.

Operating: Method 105 of MIL-STD-202, test condition C.

MIL-PRF-55310/10G

Part or Identifying Number (PIN): Consists of "M" prefix followed by specification sheet number, a dash and coded alphas, and numeric number. See example:

EXAMPLE

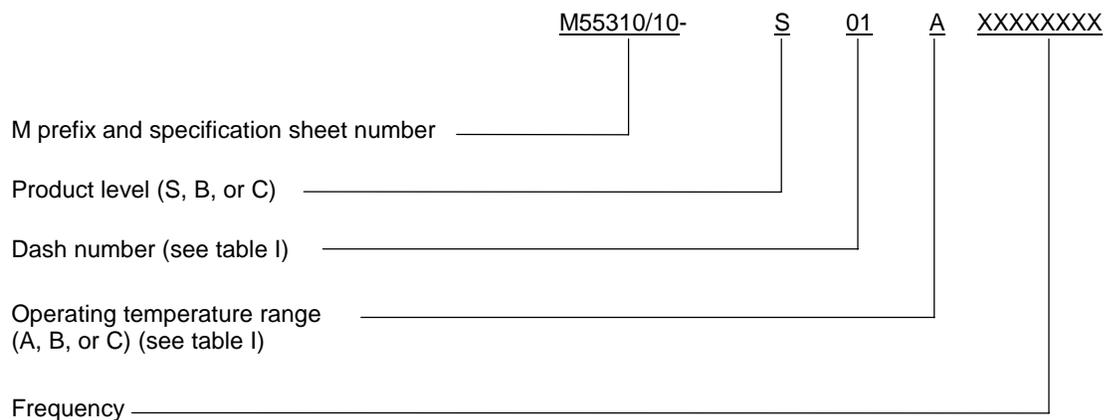

The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:  
Army - CR  
Navy - EC  
Air Force - 11

Review activities:  
Army - AR, MI, SM  
Navy - AS, CG, MC  
Air Force - 19, 99  
NASA - NA

Preparing activity:  
Army - CR

Agent:  
DLA - CC

Project 5955-0745-03)