

This is an advance copy of the dated document.
 The final document from Defense Printing Service
 may be slightly different in format due to electronic
 conversion process. Actual technical content will
 be the same.

INCH-POUND


MIL-PRF-8805/32G
 3 September 1999
 SUPERSEDING
 MIL-S-8805/32F
 17 March 1983

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, SPDT, 7 AMPERES, WATERTIGHT


This specification forms a part of MIL-PRF-8805, dated 23 January 1998, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-8805.

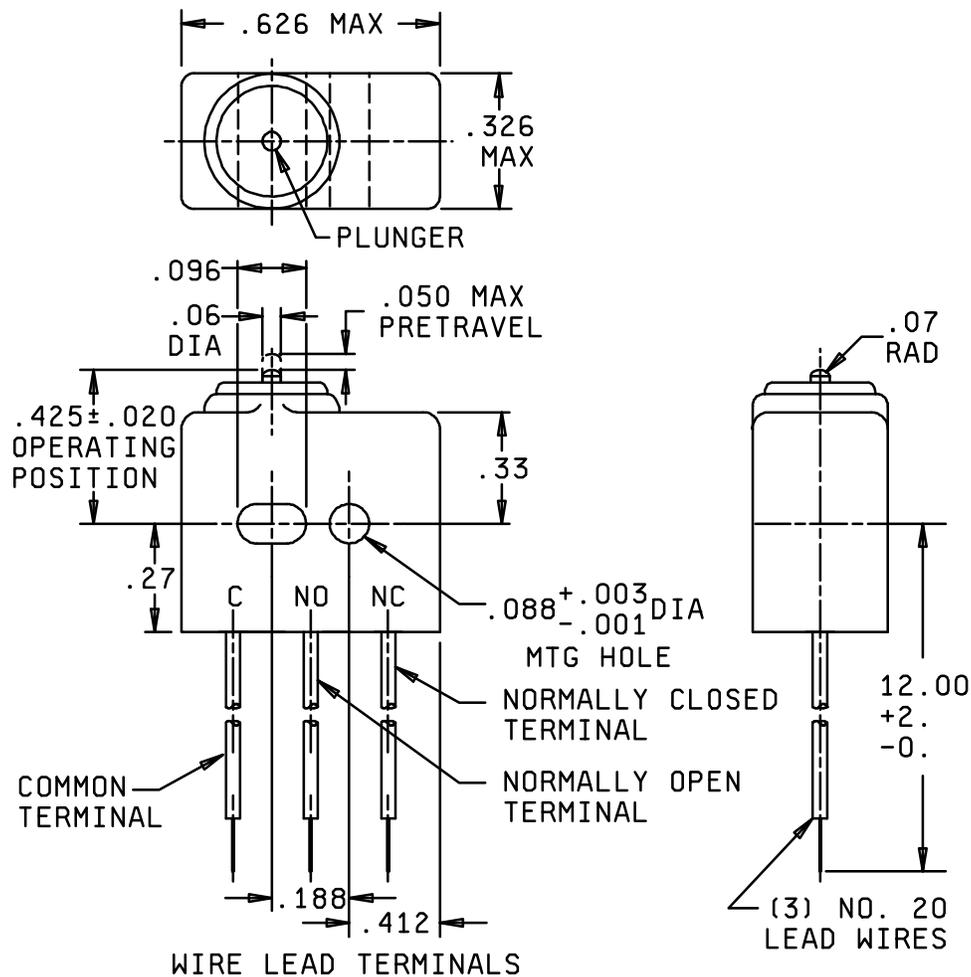

MS27934-1,-2,-4 and -5

FIGURE 1. Dimensions and configurations.

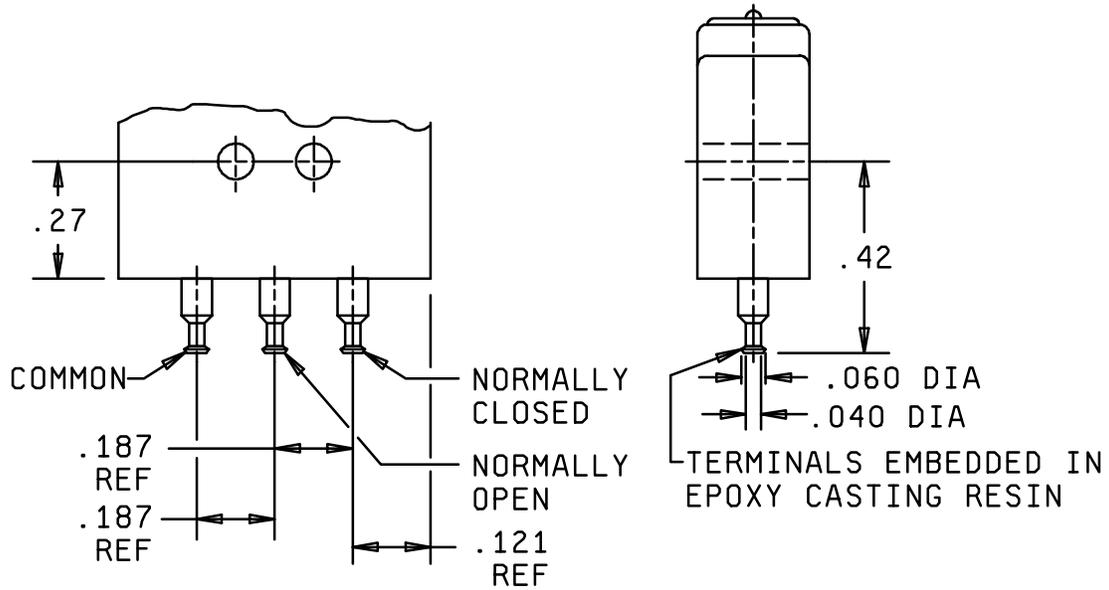

Turret terminals
MS27994-3

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.088	2.24	0.326	8.28
.003	0.08	.096	2.44	0.33	8.4
.020	0.51	.121	3.07	0.42	10.7
.040	1.02	.187	4.75	0.425	10.80
.050	1.27	.188	4.78	0.626	15.90
.06	1.52	.214	5.44	2.00	50.8
.07	1.78	.27	6.9	12.00	304.8

NOTES:

1. Dimensions are in inches.
2. Unless otherwise stated, tolerances are .02 (.5 mm) for two place decimals and ± 0.005 (.13 mm) for three place decimals.
3. Mounting holes will accept pins or screws of .087 (2.21 mm) maximum diameter on $.188 \pm 0.002$ (4.78 ± 0.05 mm) centers.
4. Exact shape of switch optional, provided dimensions specified are not exceeded.
5. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configurations (continued).

MIL-PRF-8805/32G

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Enclosure design: 3 watertight.

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: M (100 g's).

Vibration grade: 2 (10 Hz to 2,000 Hz).

Weight:

MS27994-1, MS27994-2, MS27994-4, and MS27994-5: .030 pound maximum.

MS27994-3: .01 pound maximum.

Operating characteristics:

Actuating force: 17 ounces maximum.

Release force: 4 ounces minimum.

Movement differential: .005 inch maximum

Pretravel: .050 inch maximum.

Overtravel: .004 inch minimum.

Terminals:

MS27994-1 and MS27994-2: MIL-W-16878/4, MIL-W-22759/11 or equivalent wire leads.

MS27994-3: When terminals are gold plated, the finish shall be a minimum of .000030 inch and a maximum of .000100 inch thick.

MS27994-4 and MS27994-5: MIL-W-22759/11 or equivalent wire leads.

Contact resistance:

MS27994-1, MS27994-3, and MS27994-4: Not applicable.

MS27994-2, and MS27994-5: 70 milliohms, maximum.

Dielectric withstanding voltage:

At atmospheric pressure: 1,000 V rms.

Altitude: 400 V rms at 50,000 feet. In qualification inspection table after electrical endurance, the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

Mechanical endurance: 25,000 cycles.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

MIL-PRF-8805/32G

Qualification:

Group submission:

Sample: The number of sample units for each part number covered by this specification sheet shall be as specified in table II.

Test routine: The sample units shall be divided as specified in table II and subjected to the inspections indicated.

Part number: See table III.

TABLE I. Electrical ratings.

Part number	Load	Sea level		50,000 feet 28 V dc
		28 V dc	115 V ac, 400 Hz	
MS27994-1, MS27994-3, MS27994-4, (Silver contacts)	Resistive	(Amperes) 7	(Amperes) 7	(Amperes) 7
	Inductive	4	4	2.5
	Motor	2.5	1.5	---
	Lamp	1	1	---
MS27994-2, MS27994-5, (Gold contacts)	Resistive	1	---	1
	Inductive	.5	---	.5

1/ MS27994-1 and MS27994-2 are inactive for new design.

TABLE II. Qualification inspection.

Switches for testing	Number of sample units	Examination or test	Extent of approval
MS27994-4	30	Complete qualification tables, as applicable, of MIL-PRF-8805	MS27994-1 and MS27994-4
MS27994-5	8	<u>Group I</u> Visual and mechanical examination Insulation resistance Operating characteristics	MS27994-2 and MS27994-5 <u>3/</u>
	8 from group I	<u>Group II</u> Overload cycling Electrical endurance <u>1/</u> At sea level Resistive load, dc Inductive load, dc At reduced barometric pressure Resistive load, dc Inductive load, dc Dielectric withstanding voltage <u>2/</u> Operating characteristics (all group II sample units)	

See footnotes at end of table.

MIL-PRF-8805/32G

TABLE II. Qualification inspection - continued.

Switches for testing	Number of sample units	Examination or test	Extent of approval
MS27994-3	2	<p style="text-align: center;"><u>Group I</u></p> Visual and mechanical examination Insulation resistance Operating characteristics Terminal strength Dielectric withstanding voltage Solderability	MS27994-3 <u>3/</u>

1/ Two sample units only.

2/ Seal level dielectric withstanding voltage test is to be conducted only on those units which were tested for sea level electrical endurance. Altitude dielectric withstanding voltage test is to be conducted on those units which were tested for altitude electrical endurance tests.

3/ Applies only of MS27994-4 is qualified.

TABLE III. Part number.

Part number	Contact	Termination
MS27994-1	Silver	Wire leads <u>1/</u>
MS27994-2	Gold filled or diffused	Wire leads <u>2/</u>
MS27994-3	Silver	Turret terminals
MS27994-4	Silver	Wire leads <u>3/</u>
MS27994-5	Gold filled or diffused	Wire leads <u>3/</u>

1/ MIL-W-16878/4, MIL-W-22759/11 or equivalent wire leads. Inactive for new design. Use MS27994-4.

2/ MIL-W-16878/4, MIL-W-22759/11 or equivalent wire leads. Inactive for new design. Use MS27994-5.

3/ MIL-W-22759/11 or equivalent wire leads.

Custodians:

Air Force - 11
 Army - CR
 DLA - CC
 Navy - EC

Preparing activity:

DLA - CC
 (Project 5930-1668)